IBM Aspera®

Aspera Orchestrator Development Guide

IBM Aspera

2026/11/04



BUILD • AUTOMATE • ORCHESTRATE

Contents

1 Concepts **6**
- 1.1 Introduction . . . 6
  - 1.1.1 Where to start . . . 6
  - 1.1.2 Valid and wise . . . 6
  - 1.1.3 Reference documents . . . 6
- 1.2 How Orchestrator works . . . 7
- 1.3 Terminology . . . 8
  - 1.3.1 Workflow terms . . . 8
  - 1.3.2 Operation terms . . . 8
  - 1.3.3 Designer and file names . . . 9
  - 1.3.4 Extension terms . . . 9
- 1.4 Server folders . . . 10
- 1.5 Plugin display names . . . 10
- 1.6 Statuses . . . 11

2 Workflow development practices **12**
- 2.1 First workflow in the designer . . . 12
- 2.2 Rules at a glance . . . 13
- 2.3 Designing a workflow . . . 13
  - 2.3.1 Method . . . 13
  - 2.3.2 Automation levels . . . 15
  - 2.3.3 Separate the trigger from the processing . . . 16
  - 2.3.4 Sub-workflow or workflow launcher . . . 16
  - 2.3.5 Reusable building blocks . . . 17
  - 2.3.6 Naming conventions . . . 17
- 2.4 Working in the designer . . . 18
  - 2.4.1 Changes and revisions . . . 18
  - 2.4.2 Configuration or template . . . 18
  - 2.4.3 Testing . . . 20
  - 2.4.4 Designer tips . . . 20
- 2.5 Passing data between steps . . . 20
  - 2.5.1 Inputs and mappings . . . 20
  - 2.5.2 Output visibility and carry through . . . 20
  - 2.5.3 Using parameters . . . 21
  - 2.5.4 Using placeholders . . . 21
  - 2.5.5 Types and conversions . . . 22
  - 2.5.6 Keep data small . . . 22
- 2.6 Configuration . . . 22
  - 2.6.1 Stored parameter set . . . 23
  - 2.6.2 Lookup table . . . 23
  - 2.6.3 Remote nodes . . . 24
  - 2.6.4 Using secrets . . . 24
- 2.7 Control flow . . . 25
  - 2.7.1 Exits and statuses . . . 25
  - 2.7.2 AND and OR . . . 25
  - 2.7.3 Conditions . . . 27
  - 2.7.4 Parallel branches . . . 27
  - 2.7.5 Loops . . . 29

2.7.6 Fan-out and funnel-in . . . 30
2.7.7 Waiting and timeouts . . . 34
2.8 Error handling . . . 36
2.8.1 Design for exceptions . . . 36
2.8.2 Using retries . . . 36
2.8.3 Using timeouts . . . 36
2.8.4 Cancel . . . 38
2.8.5 Meaningful status . . . 38
2.8.6 After a failure . . . 41
2.9 Using triggers . . . 42
2.9.1 Continue monitoring . . . 42
2.9.2 Persistency scope . . . 42
2.9.3 Rules for triggers . . . 44
2.9.4 Choosing a watcher . . . 45
2.10 Files, transfers and remote execution . . . 45
2.10.1 File operations . . . 45
2.10.2 Transfers . . . 46
2.10.3 Remote execution . . . 46
2.10.4 Generating text and calling services . . . 48
2.11 Custom code . . . 48
2.12 Resource management . . . 52
2.12.1 Resource concepts . . . 52
2.12.2 Resource pools . . . 52
2.12.3 The pattern . . . 53
2.12.4 Timeouts and capacity . . . 53
2.12.5 Queue . . . 55
2.12.6 Operating with queues and pools . . . 58
2.12.7 High volume . . . 58
2.13 Human interaction . . . 59
2.13.1 User input . . . 59
2.13.2 Direct start . . . 59
2.14 Monitoring and operations . . . 62
2.14.1 Journals . . . 62
2.14.2 Alerts . . . 64
2.14.3 Monitors . . . 64
2.14.4 Dashboards . . . 64
2.14.5 Work order view . . . 64
2.14.6 Workers and capacity . . . 66
2.14.7 Users and permissions . . . 66
2.15 Integration API . . . 68
2.15.1 Using inline validation . . . 68
2.16 Deploying and changing workflows . . . 69
2.17 Practices checklist . . . 69

3 Workflow authoring **71**
3.1 Quick start . . . 71
3.2 Lifecycle . . . 72
3.3 Workflow file . . . 72
3.3.1 File types . . . 72
3.3.2 Structure . . . 73
3.3.3 Plain format . . . 73
3.3.4 Rails format . . . 73
3.3.5 Workflow attributes . . . 74
3.3.6 Whiteboard attributes . . . 74
3.3.7 Action templates . . . 74
3.3.8 Referring to existing entities . . . 75
3.4 Graph XML . . . 76
3.4.1 Skeleton . . . 76
3.4.2 Terminal nodes . . . 76
3.4.3 Step . . . 77

3.4.4 Prerequisites and branches . . . 77
3.4.5 Inputs . . . 78
3.4.6 Outputs . . . 79
3.4.7 Parameters . . . 79
3.4.8 Value types . . . 80
3.4.9 Notes . . . 80
3.5 Inputs of a step . . . 80
3.5.1 Placeholders . . . 81
3.5.2 Plugin specifications . . . 82
3.6 Execution . . . 83
3.6.1 Retries . . . 83
3.6.2 Timeouts . . . 83
3.6.3 Processing code . . . 83
3.6.4 Triggers . . . 84
3.6.5 History of past triggers . . . 84
3.7 Main action plugins . . . 85
3.7.1 CustomRuby . . . 85
3.7.2 Filter . . . 86
3.7.3 LocalFileWatcher . . . 86
3.7.4 SimpleParameterLookup . . . 87
3.7.5 Faspex5InboxWatcher . . . 88
3.7.6 AsperaNodeApiTransferOperation . . . 88
3.7.7 WorkflowLauncher . . . 88
3.7.8 ArrayFanout and Funnelin . . . 89
3.8 Secrets . . . 89
3.8.1 Where a secret is stored . . . 89
3.8.2 Where a secret is displayed . . . 90
3.8.3 Secret references . . . 91
3.8.4 Secret given at run time . . . 91
3.9 REST API . . . 91
3.9.1 import_workflow . . . 92
3.9.2 export_workflow . . . 92
3.9.3 publish_workflow . . . 92
3.9.4 find_constraints . . . 92
3.9.5 import_with_constraints . . . 93
3.9.6 initiate . . . 93
3.9.7 Other workflow endpoints . . . 93
3.9.8 ascli commands . . . 94
3.10 Inline validation . . . 95
3.10.1 Validation settings . . . 95
3.10.2 Validation call . . . 95
3.10.3 Validation answer . . . 96
3.10.4 Validation and the transfer . . . 96
3.11 Recipes . . . 96
3.11.1 Recipe: minimal workflow . . . 96
3.11.2 Recipe: runtime parameter and step chaining . . . 96
3.11.3 Recipe: branch on a status . . . 97
3.11.4 Recipe: wait for a file . . . 98
3.11.5 Recipe: sub-workflow with outputs . . . 99
3.11.6 Recipe: one work order per file . . . 101
3.11.7 Recipe: queue and resource pool . . . 104
3.11.8 Recipe: lookup table . . . 106
3.11.9 Recipe: operator decision . . . 107
3.11.10 Update an existing workflow . . . 110
3.12 Authoring checklist . . . 111
3.13 Known issues . . . 111

4 Extending Orchestrator **113**
4.1 Plugins and portlets compared . . . 113
4.2 Installing and updating . . . 114

4.3 Testing and debugging . . . 114
4.4 Security . . . 114
4.5 Learning Ruby and Rails . . . 115

5 Plugin development 116
5.1 Plugin quick start . . . 116
5.1.1 Plugin source . . . 116
5.1.2 Plugin install and run . . . 119
5.2 Plugin folder . . . 120
5.2.1 Plugin names . . . 120
5.2.2 Plugin files . . . 120
5.2.3 Plugin metadata file . . . 120
5.2.4 Migrations . . . 121
5.3 Plugin class . . . 122
5.3.1 Plugin structure . . . 122
5.3.2 Plugin methods . . . 122
5.3.3 Category . . . 123
5.3.4 Plugin types . . . 124
5.3.5 Plugin statuses . . . 124
5.4 Inputs and outputs . . . 124
5.4.1 Inputs from attributes . . . 125
5.4.2 Payload . . . 126
5.4.3 MultiType . . . 126
5.5 Plugin execution . . . 126
5.5.1 Synchronous execution . . . 126
5.5.2 Asynchronous execution . . . 128
5.5.3 Plugin triggers . . . 128
5.5.4 Plugin timeouts . . . 129
5.5.5 Progress . . . 129
5.5.6 Pause, resume, cancel, rollback . . . 129
5.5.7 Helpers . . . 130
5.5.8 Dependencies . . . 130
5.6 Template form . . . 130
5.6.1 Rendering . . . 130
5.6.2 Saved values . . . 131
5.6.3 Custom HTML, CSS and JavaScript . . . 132
5.6.4 Server data for the form . . . 132
5.6.5 Help page . . . 133
5.7 Plugin installation and updates . . . 133
5.7.1 Installing a plugin . . . 133
5.7.2 Plugin importing and exporting . . . 134
5.7.3 Updating a plugin . . . 134
5.7.4 Gems and external tools . . . 134
5.8 Plugin testing and debugging . . . 134
5.9 Plugin security . . . 135
5.10 Plugin checklist . . . 135
5.11 Plugin annex . . . 136
5.11.1 Extending Orchestrator from a plugin . . . 136
5.11.2 Patterns in the shipped plugins . . . 136
5.11.3 Adding a gem to Orchestrator . . . 137

6 Portlet development 138
6.1 Portlet quick start . . . 138
6.1.1 Portlet source . . . 138
6.1.2 Portlet install and run . . . 139
6.2 Portlet folder . . . 140
6.2.1 Portlet names . . . 140
6.2.2 Portlet files . . . 140
6.2.3 Portlet metadata file . . . 140
6.3 Portlet class . . . 141
6.3.1 Portlet structure . . . 141

6.3.2 Portlet methods . . . 141
6.3.3 Portlet types . . . 142
6.3.4 Runtime values . . . 142
6.3.5 Parameter `refresh` . . . 142
6.4 Views and actions . . . 142
6.4.1 Display in a frame . . . 142
6.4.2 Main view . . . 143
6.4.3 Configuration partial . . . 143
6.4.4 JavaScript . . . 144
6.4.5 Actions . . . 144
6.5 Portlet installation and updates . . . 145
6.5.1 Installing a portlet . . . 145
6.5.2 Portlet importing and exporting . . . 145
6.5.3 Updating a portlet . . . 145
6.5.4 Upgrading a legacy portlet . . . 146
6.6 Portlet testing and debugging . . . 146
6.6.1 Portlet known issues . . . 146
6.7 Portlet security . . . 147
6.7.1 Permissions . . . 147
6.7.2 Security of actions . . . 148
6.8 Portlet checklist . . . 148
6.9 Portlet annex . . . 148
6.9.1 Custom portlets . . . 148
6.9.2 Patterns in the shipped portlets . . . 148

7 About this guide **150**
7.1 How each chapter was verified . . . 150

Chapter 1

Concepts

This chapter gives what the other chapters rely on: where to start for each goal, how Orchestrator works, the terms, the server folders, the plugin display names and the statuses. Read it first: the other chapters use these terms, and explain further only those that have a section of their own.

1.1 Introduction

This guide applies to Orchestrator 4.1.6: About this guide says how each chapter was verified. Its source is at github.com/laurent-martin/aspera-orchestrator-plugins-doc.

This guide explains how to develop for IBM Aspera Orchestrator: how to design and write workflows, and how to extend Orchestrator with action plugins and portlets.

It is written for people and for AI assistants.

1.1.1 Where to start

Any reader can begin with How Orchestrator works and Terminology, then go on by goal:

Goal	Read
Build a workflow in the designer	First workflow in the designer, Rules at a glance, Practices checklist
Write or generate a workflow file (also for AI assistants)	Quick start, Recipes, Authoring checklist
Find why a work order does not end or fails	AND and OR, Work order view, Known issues
Start or follow workflows from another application	Integration API, REST API, ascli commands
Look up a shipped plugin	The reference documents, Main action plugins
Add a step type	Plugins and portlets compared, Plugin quick start
Add a dashboard widget	Plugins and portlets compared, Portlet quick start

1.1.2 Valid and wise

Workflow authoring says what is valid: what Orchestrator accepts and how it behaves. Workflow development practices says what is wise: among the valid choices, which one to make and why. A workflow can be valid and still be a poor design.

If the two chapters differ on how Orchestrator behaves, follow Workflow authoring: it is derived from Orchestrator 4.1.6 and its examples were executed on 4.1.6.


Workflow development practices describes the graphical designer. The designer and the operation of Orchestrator (monitors, journals, dashboards, direct start pages) are described only there. Workflow authoring shows the same objects as XML (for example `Synch_factor` for the OR operator).

1.1.3 Reference documents

These documents are separate from this guide:

- Action Template Reference: attributes, inputs and outputs of every shipped action plugin (generated from Orchestrator).
- Plugin specifications (`plugins.yml`): the same as data (YAML), with the allowed values of attributes and the template settings each input and output depends on. Its header describes its fields. Read one plugin with `yq`: `yq '.AmazonS3Operation' plugins.yml`.
- Plugin Manual: functional description of each shipped action plugin.

1.2 How Orchestrator works

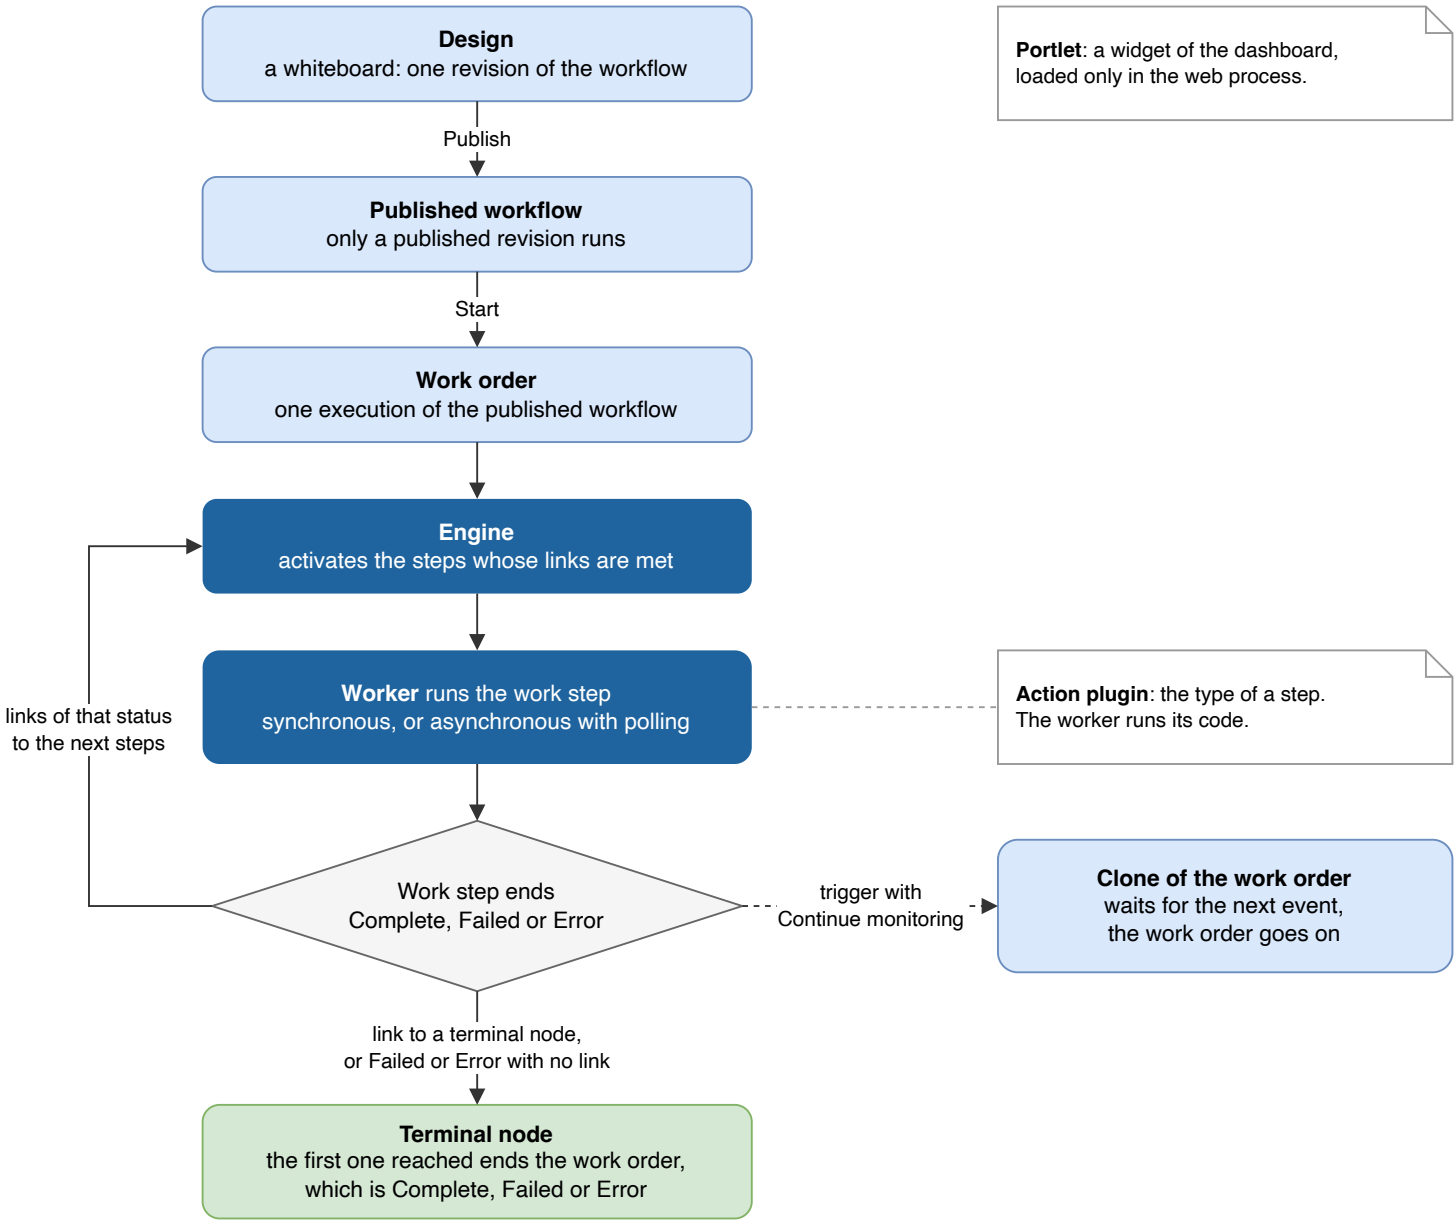

Orchestrator, from the design of a workflow to the end of a work order

A workflow is a graph of steps and links, designed in the designer or written as a file; one revision of this design is a whiteboard. Publishing a revision builds the runnable workflow: only a published revision runs. Each start of a published workflow creates a work order, one execution of that workflow. The engine activates the steps whose links are met. A worker runs each step: synchronous, until the step ends, or asynchronous, starting a job and then polling its status (Workers and capacity, Plugin execution). A work step ends with a status, and the links of that status lead to the next steps. The first terminal node reached ends the work order; a `Failed` or `Error` status with no link reaches one implicitly (Terminal nodes). A trigger waits for an event; with Continue monitoring, the work order is cloned at the trigger step each time this step ends with a status other than `Error`: the work order goes on with the next steps, and the clone waits for the next event.

An action plugin is the type of a step: a worker runs its code (Plugin development). A portlet displays a widget of the

dashboard: it is loaded only in the web process, not in the engine or the workers (Portlet development).

1.3 Terminology

These tables give the meaning of the terms used in all chapters. A term with a section of its own links to it for the details. The last column gives the label that the web interface shows, when it differs. A reader who only builds workflows can stop before Extension terms.

1.3.1 Workflow terms

Term	Meaning	In the web interface
Workflow	A named process definition: steps, links and conditions, identified by an integer `id` and a `portable_id` (UUID). Like a class in object-oriented programming.	Workflow
Whiteboard	One revision of the design of a workflow: the graph, stored as XML in attribute `xml_export`.	Revision
Publish	Build the runnable workflow (steps, inputs, outputs, parameters, branches) from a whiteboard. Only a published revision runs.	Publish
Work order	One execution of a published workflow. Like an object, an instance of the class.	Work order
Step	A node of the graph that executes an action.	Step
Work step	One execution of a step in a work order.	Work step
Action plugin, plugin	The type of a step, for example `CustomRuby` (step type, action type). In development, a Ruby class that includes module `Action`, and its folder. The designer shows display names, listed in Plugin display names.	Action
Action template, template	A configured instance of an action plugin: a database record holding the plugin settings (its attributes). Each step references one template by `Step_type` and `Action_id`.	Template
Embedded template	A template that belongs to one workflow, named `W<WORKFLOW_ID>__<STEP_NAME>`.	Configuration (New configuration)
Global template	A template shared by several workflows, identified by its name. It is created in Workflows > Workflow Actions.	Template
Attribute	A setting of a template: a column of the plugin table, edited in the template form.	Field of the form
Input, Output	Named values consumed and produced by a step, as declared by the action plugin (`inputs_spec`, `outputs_spec`).	Inputs, Outputs tabs
Parameter	A named value of the workflow, linked to Start (global parameter) or to a step (step parameter). See Parameters.	Parameter
Global parameter	A parameter linked to Start: all steps see it, without carry through. See Using parameters.	-
Runtime parameter	A parameter whose value can be given when starting the workflow: an input of the workflow. See Parameters.	-
Carry through	Option of a step output that passes it to the step after the next one.	Carry Thru?
Trigger, watcher	A step that waits for an event (file, transfer, message, schedule) and starts the processing.	Trigger
OR operator	A connector that starts the next node when one of its entries is activated, or `n` of them (”n of m”). Without it, several links into a node mean AND: all of them must be activated. See AND and OR.	OR, in palette Connectors
Remote node	A server defined once, with its id, name, address and SSH or API credentials. Steps and lookup tables refer to the node, not to its address. See Remote nodes.	Workflows > Remote Nodes

Template wording: Workflow authoring says *embedded template* and *global template* where Workflow development practices, which follows the designer, says *configuration* and *template*. Plugin development says *template* for both. Where a text only says *template*, it means either kind.

1.3.2 Operation terms

Term	Meaning	In the web interface
Work order group	The work orders cloned from one trigger started with Continue monitoring.	Trigger Persistence Scope: by workorder group
Worker	A process of Orchestrator that executes steps: synchronous (busy until the step ends) or asynchronous (polls).	-
Obsolete step	A step of a branch that is no longer followed, because another branch went on through an OR, or a failure ended the work order. See Parallel branches.	-
Starvation	A wait that never ends: a step waits on an AND of links that can never all be activated (AND and OR), or work orders wait for a slot that is never released (The pattern).	-
Resource, resource pool	A pool has resources, each with a capacity (number of slots), and a request reserves slots. A resource is a ticket, not a machine: Orchestrator checks nothing on a server. See Resource concepts.	Workflows > Resources
Queue	A FIFO with priorities between the work and a resource pool, which shows what waits for a slot. An element is a string, for example a path, not the file. See Queue.	Queues view
Journal	A log of workflow activity for operators, in their language, grouped by file and package. A journal step or an inline journal writes the entries. See Journals.	Work Orders > Journals; books in Workflows > Journals
Monitor	A check of a workflow, of work orders, of a folder, of a script or of a remote node, with an action such as starting or calling a workflow. See Monitors.	Monitors
Capsule	Code installed by hand on the server: a hot fix of Orchestrator, or code shared by several steps. Force maintenance after installing one. See Deploying and changing workflows and Custom code.	Engine > Capsules

1.3.3 Designer and file names

The designer and the workflow file give different names to the same objects. Workflow development practices uses the names of the designer, and Workflow authoring those of the file.

Designer	Workflow file	Details
Start, Complete, Failed, Error nodes, in capitals on the canvas	`Start`, `End`, `Fail`, `Error`. The Complete node is not the status `Complete`: a step that ends `Complete` only follows its links, and the work order is `Complete` when it reaches this node.	Terminal nodes, Statuses
Link between nodes	`Prerequisite`, in the node at the end of the link	Prerequisites and branches
OR, ”n of m”	`Synch_factor` `n` of the node after the OR, `1` for a plain OR; AND is `0`	Prerequisites and branches
Carry Thru?	`Carry_thru`	Outputs
Continue monitoring	`allow_multiple`, `keep_ongoing`, depending on the plugin: an attribute of the template	Triggers
Trigger Persistence Scope, called persistency scope in this guide	`trigger_type`, an attribute of the template	History of past triggers
Retry tabs	`Error_*`, `Failed_*`	Retries
On Timeout Action, Make Timeout Absolute	`On_timeout`, negative `Timeout`	Timeouts

1.3.4 Extension terms

Term	Meaning	In the web interface
Stock folder	The source of a plugin (`/opt/aspera/orchestrator/actions/<FOLDER>`) or of a portlet (`/opt/aspera/orchestrator/portlets/<ID>`).	-

Term	Meaning	In the web interface
Load folder	`<CONFIG_DIR>/actions/<FOLDER>`, by default `/opt/aspera/var/config/orchestrator/actions/<FOLDER>`: the copy of the stock folder made when the plugin is enabled, from which Orchestrator loads it.	-
Portlet	A Ruby class that inherits from `Portlet`, for example `HelloBanner`, and its folder. Displays one widget.	Portlet
Portlet ID	The folder name in snake_case, for example `hello_banner`. The class name is `portlet_id.camelize`.	-
User folder	`<CONFIG_DIR>/portlets/<ID>`, by default `/opt/aspera/var/config/orchestrator/portlets/<ID>`: portlets written or imported by the user.	-
Frame	A zone of a dashboard page. A frame shows one portlet, or is split horizontally or vertically into sub-frames. Stored in table `frames`.	Frame
Dashboard	The frames of a user or of a group.	Menu Dashboard
Portlet parameter	A named, typed setting of a portlet, edited in the configuration of the frame and stored in the frame, not in the portlet. Not a workflow parameter.	Frame configuration
Runtime value	The value of a portlet parameter during one display: the frame value, or the default.	-
Portlet action	A public method of the portlet controller, called from the view with an HTTP request, for example to load a table page.	-
Custom portlet	A portlet defined in the web interface (Ruby and ERB text in the database) instead of files. See Custom portlets.	Custom portlet

1.4 Server folders

Orchestrator is installed in `/opt/aspera/orchestrator`, and runs as user `aspweb` in 4.1.6. The chapters write three of its folders with a placeholder, which stands for the setting `config_dir`, `run_dir` or `archive_dir`:

Placeholder	Default	Content
`<CONFIG_DIR>`	`/opt/aspera/orchestrator/config/orchestrator`, a link to `/opt/aspera/var/config/orchestrator`	Load folders of plugins (`actions`), user folders of portlets (`portlets`), forms of user input (`actions_config/user_inputs`), direct start pages (`workflow_start_views`).
`<RUN_DIR>`	`/opt/aspera/orchestrator/var/run/orchestrator`	Runtime files: uploaded workflows (`workflows/import`), files of a plugin (`<FOLDER>`), imports and exports of portlets (`portlet`).
`<ARCHIVE_DIR>`	`/opt/aspera/orchestrator/archive`	Backups of plugins made at upgrade (`action_backups`).

The log of Orchestrator is `/opt/aspera/orchestrator/log/production.log`.

To restart Orchestrator:

- The web server: `systemctl restart orchestrator_server`.
- All services: `orchestrator restart`.

1.5 Plugin display names

The designer shows the plugin display names. This guide uses the plugin class names, as in plugins.yml:

Display name	Plugin
Stored parameter set (formerly mass parameter set)	`MassParameterSetter`
Lookup table	`SimpleParameterLookup`
Array fan-out (+), funnel-in (–)	`ArrayFanout`, `Funnelin`
Sub-workflow, workflow launcher	`SubWorkflow`, `WorkflowLauncher`
Work order metadata	`WorkOrderMetaData`
Exit status	`ExitStatus`
Custom action (Ruby), custom Ruby trigger	`CustomRuby`, `CustomTrigger`
Queue stager, load manager, resource manager	`QueueStager`, `LoadManager`, `ResourceManager`
Journal log entry, alert entry	`FileJournalLogEntry`, `OrchestratorAlertEntry`
Path conversion, file generator, file information	`ConvertPath`, `FileGenerator`, `FileInfo`

1.6 Statuses

A work step ends with one of the following statuses, which are matched by the `status` of prerequisites:

Status	Meaning
`Complete`	Success.
`Failed`	Functional failure (for example a filter evaluated to false).
`Error`	Technical error (exception, timeout with `On_timeout` set to `Error`).

While running, a work step can also be `Inactive`, `In Progress`, `Paused`, `Canceling`, and so on. A work order is `Complete`, `Failed` or `Error` when it reaches `End`, `Fail` or `Error`, and `Canceled` when canceled.

Chapter 2


Workflow development practices

This chapter gives the rules for designing workflows that are reliable and easy to operate: among the choices that Orchestrator accepts, which one to make and why. Read it before designing a workflow, and use the Practices checklist to review one. For the exact elements and values, see Workflow authoring.

2.1 First workflow in the designer

This is the `hello` workflow of the Quick start, built with the mouse: one `CustomRuby` step that returns the output `message`.

1. In Workflows, open the folder that will hold it, click New Workflow, enter a name and a description, and click Save. The designer opens, with the nodes START, COMPLETE, FAILED and ERROR.

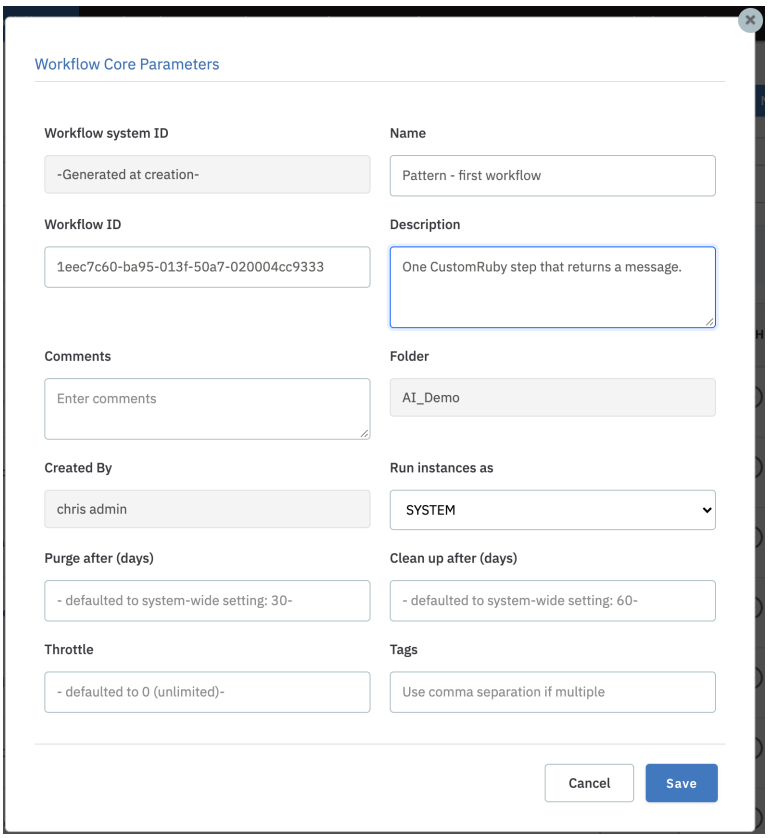

The New Workflow dialog, with a name and a description

2. In the plugin palette on the left, type `Custom Ruby` in Search plugins, and drag Custom Ruby to the canvas.

3. Drag from the output port of START to the input port of the step, then from the output port of the step to the input port of COMPLETE. The two small icons under the step are its Failed and Error exits: they stay unlinked here.
4. Right-click the step, choose Rename Step, enter `Say hello`, and confirm.
5. Right-click the step again, choose Edit Action Template, and in Outputs click Add Outputs: enter `message` and choose the type `String/Text`. In Execute code, enter `outputs['message'] = 'Hello'`, then click Save.
6. Click Save in the toolbar of the designer, and confirm the message that offers to enter a summary of the changes.
7. Click Publish: Orchestrator goes back to the list of workflows, where the workflow shows the status Published.
8. Click the launch icon of the workflow, then Start.
9. Open Work Orders, select the work order, which is `Complete`, and click its step: the output `message` is `Hello`.

The graph is the same as the one of the file in the Quick start, so the same work order can be started with `ascli`. The next sections give the rules to apply when the workflow has more than one step: see Rules at a glance, and Testing to check a workflow before it goes to production.

2.2 Rules at a glance

The most important rules, each detailed later:


1. Spend most of the design time away from the designer: split the problem into blocks, and ask for each block "what if something goes wrong?" (Method).
2. Separate the trigger (when to act) from the processing (what to do): the processing workflow takes the detected element as a parameter, and the trigger workflow starts it (Separate the trigger from the processing).
3. Only one step with Continue monitoring from start to end, sub-workflows included (Rules for triggers).
4. Never combine Continue monitoring with persistency scope none (Persistency scope).
5. Several links into a step mean AND. Mutually exclusive links (complete and failed of a step, if and else) must go through an OR, otherwise the work order never ends (AND and OR).
6. In the designer, a step can map only the outputs of the steps linked to it: carry other outputs through, or use global parameters (Output visibility).
7. Centralize configuration in templates (stored parameter set, lookup table, remote nodes); never hard-code values in steps or in Ruby code (Configuration).
8. Exactly one step between a fan-out and its funnel-in: use a sub-workflow for more (Fan-out and funnel-in).
9. Make every outcome readable: work order label, exit status messages, journals (Meaningful status).
10. Use `CustomRuby` only when no plugin does the job, or when it saves many steps (Custom code).
11. Between the allocation and the release of a resource, put one step or one sub-workflow, and release on every exit (Resource management).
12. When a load manager and its queue are in the same work order, map the expected queued item (Queue).
13. Test each block alone, and test after each change (Testing).
14. After changing the structure of a workflow, run new work orders (relaunch); reset reruns the old revision (Changes and revisions).

2.3 Designing a workflow


2.3.1 Method

A workflow automates an end-to-end process that is usually described in one sentence by the person who requests it. That sentence is not enough to build the workflow.


- Spend most of the time (up to 90 %) at a whiteboard or on paper, not in the designer.
- Break the end-to-end process into macro-actions, and each macro-action into smaller actions, until each block is simple. In Orchestrator, a macro-action becomes a sub-workflow, like a function in a program. Iterate: the breakdown changes when you learn more.
- For each block, write down its inputs, its outputs and its specifications (file patterns, files to ignore, polling interval).
- For each step, ask "what if something goes wrong?": folder missing, server down, bad content. Decide which failures to handle and how (notify, retry, move the file to an error folder), and which ones you accept. You cannot handle everything, but an unhandled foreseeable failure is the call you get at 3 a.m.

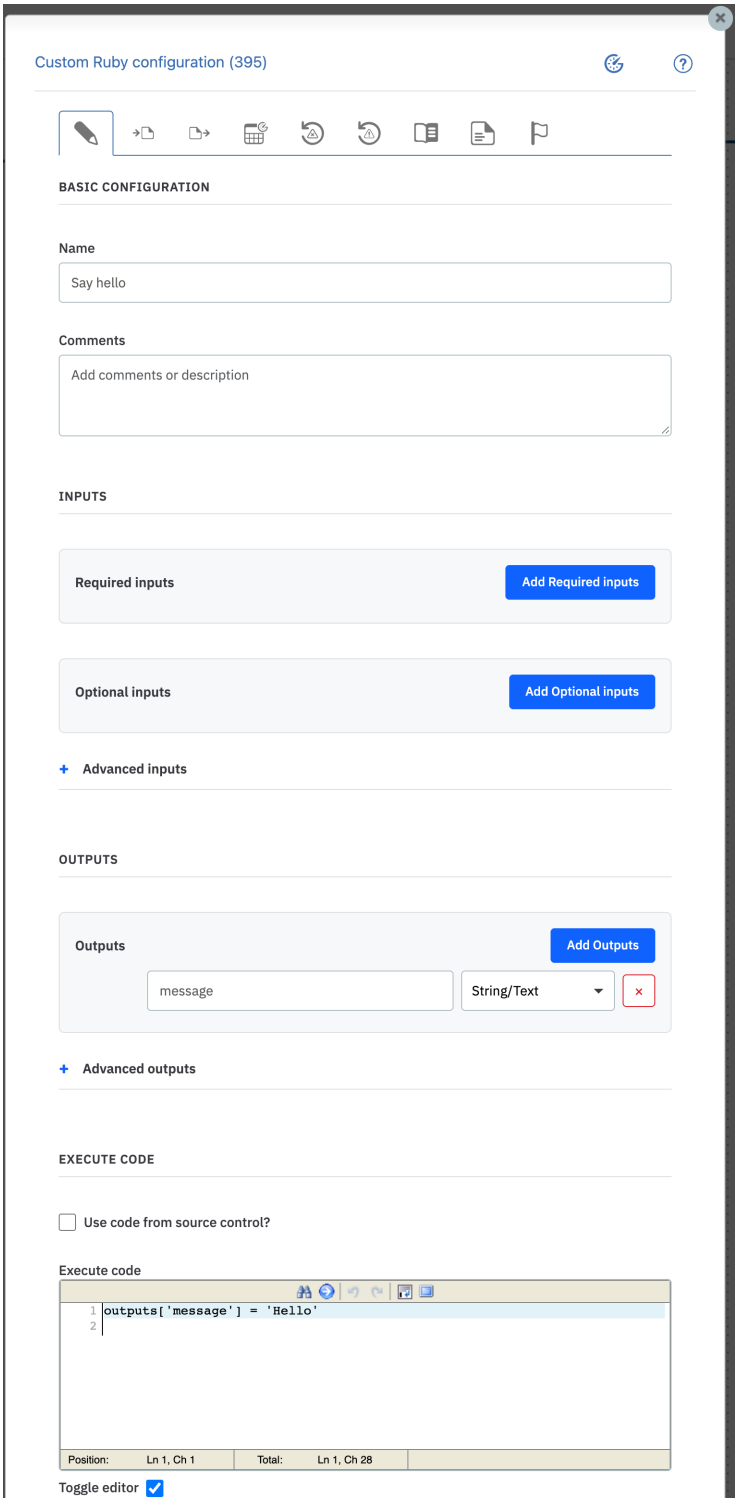

The step configuration: output message, and the code that sets it

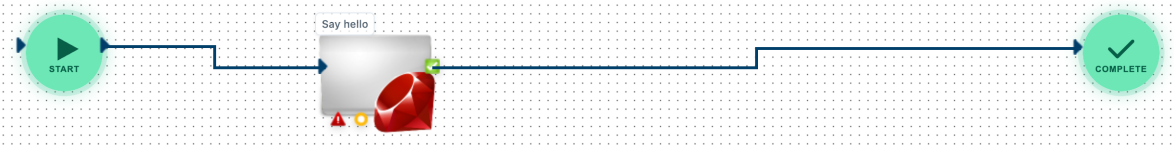

The workflow: START, the step Say hello, COMPLETE

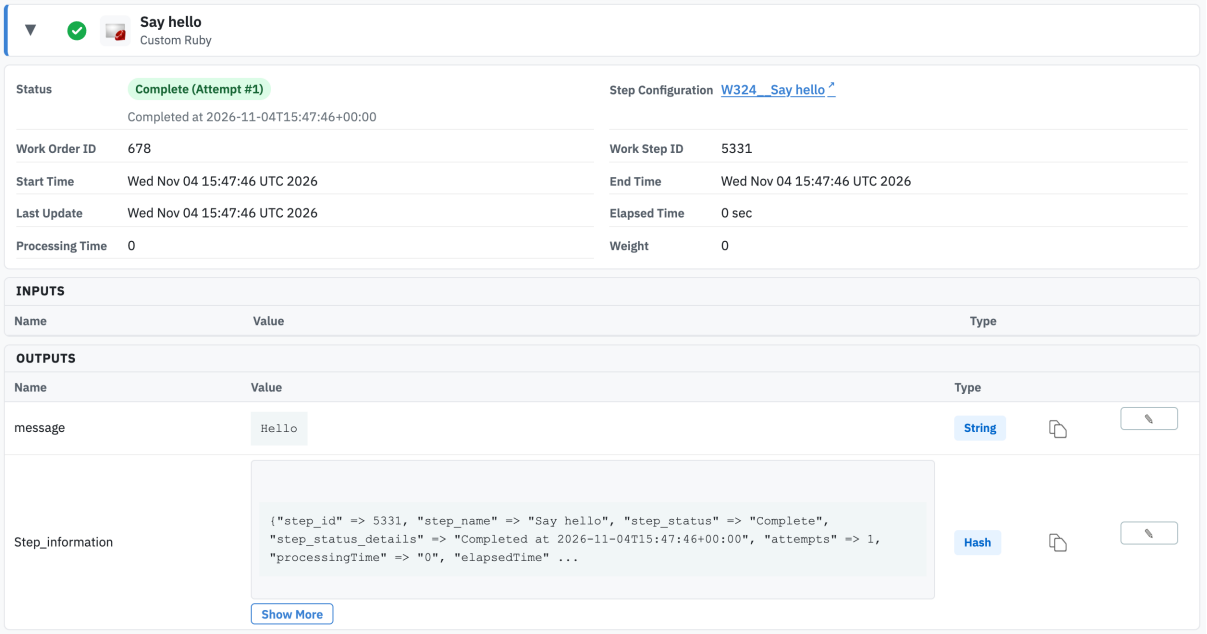

The work step Say hello: status Complete, output message = Hello

- Identify the steps that are heavy or long (transcoding, checksum, transfer) and ask what happens if hundreds run in parallel: put resource control around them (Resource management).
- Identify what can run in parallel: operations on independent storage, or the same operation on each element of a list.
- Identify where an operator is needed: a decision after an error (retry, skip, fail), or missing information (manual quality control). Keep these exceptional.
- Identify what operators need to see: labels, messages, journals, dashboards (Monitoring and operations).
- Plan the clean-up: move or delete detected files and temporary folders, or the file system fills up.
- Check the network layout: where the remote systems are (safe zone, DMZ, cloud), which side opens connections, which ports, Windows or Linux (paths). Triggers poll from Orchestrator: the watched system must be reachable from Orchestrator.
- Identify third-party interfaces early: existing plugin, generic REST or SOAP request, remote command, or Ruby code.
- Run heavy processing on dedicated machines, not on Orchestrator or on transfer servers: Orchestrator coordinates.
- Do not over-engineer: if 10 transfers happen per day, no queue or resource pool is needed.
- Do not use Orchestrator only to start scripts: write the logic as a workflow, so that it is visible, monitored and restartable.

Most integrations need few plugins. With the generic plugins (REST request, SOAP request, database query, local and remote command execution, file operations) you can do almost everything. The other plugins wrap the same techniques with a simpler interface.

2.3.2 Automation levels

Level	Description	Started by
Fully automated	No human interaction. Every foreseeable error has a way out, even if it is a clean failure.	A trigger.
Semi-automated	Automatic, but asks an operator in some cases (decision, missing data, error).	A trigger.
One-shot	Runs when called, does its job and ends: maintenance, fix of one file, call from another system.	An operator, another workflow or an application.

A workflow can be started:

- by a trigger step (file, transfer, message queue, database, e-mail, schedule, REST polling);
- from Work Orders > New Work Order, or from the start button of the designer;
- by another workflow: `SubWorkflow`, `WorkflowLauncher`, or `FederatedWorkflow` (on another, standalone Orchestrator);
- by a monitor (auto-start of a workflow that stopped);

- from a dashboard page or a direct start page (Human interaction);
- by the REST API (Integration API);
- by Aspera inline validation, during a transfer (Using inline validation).

One-shot workflows are often forgotten but useful: a ”fix” workflow that reruns one part of the processing on one file avoids resubmitting the file through the whole chain.

2.3.3 Separate the trigger from the processing


The first split of any workflow: the trigger (when to act: a file arrives) and the processing (what to do: process the file).

- Build the processing workflow first: it processes one element, received as a runtime parameter (for example `p_file_path`).
- Build the trigger workflow last: it detects elements and starts the processing workflow with `WorkflowLauncher`, one work order per element. The trigger is the hardest part to test; when you add it, everything else is ready.

Benefits:

- You test the processing with any file, even outside the production folders, without uploading files or writing database rows to fire the trigger.
- You rerun the processing of one element (reset or relaunch of its work order) without touching the trigger. In a single workflow, a reset restarts at the first step, the trigger.
- Each work order has its own label and status: operators find an element directly.

A `SubWorkflow` step inside the trigger workflow does not separate the trigger from the processing: it runs in the same work order, and a relaunch restarts the trigger.

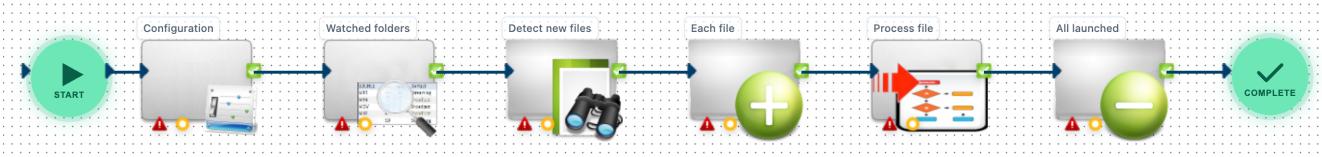


A trigger workflow: configuration, lookup table, file watcher, then one launched work order per file inside a fan-out

2.3.4 Sub-workflow or workflow launcher

	`SubWorkflow`	`WorkflowLauncher`
Waits for the called workflow	Yes: blocking, like a function call.	No: fire and forget (an option can wait for completion).
Outputs	The outputs of the called workflow that you expose in the step configuration.	The id of the launched work order; its status when waiting.
Status	Failure or error of the called workflow fails the step.	Success once launched, error if the launch fails. When waiting: a failure fails the step only with Fail if launched work order fails; an error or a cancel always fails it *(4.1.6)*.
Work order	Child work order, shown inside the parent.	Independent work order, with its own label.
Use for	A block of a larger processing; error handling at the caller level.	Splitting trigger and processing; starting independent workflows.

Rules:

- A sub-workflow is a black box: the caller gives inputs and gets the outputs it needs. Expose only those outputs.
- Select End with workorder status in the sub-workflow step to report the status detail of the called work order, rather than the status of its last step.
- Select Use true name to show the workflow name without ”launched by … at …” in the title.
- With `WorkflowLauncher`, set the label of the launched work order (for example the file name), and set Master id to a fixed value (a negative number does not clash with work order ids) to group launched work orders on one line in View by work order.

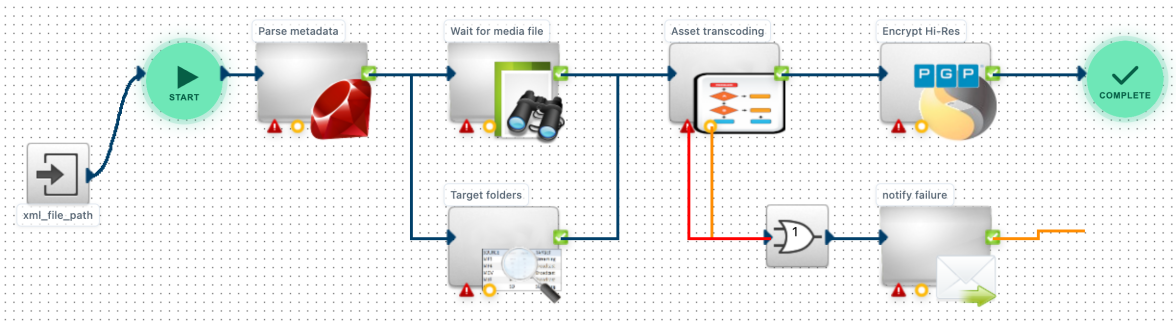

A sub-workflow step (”Asset transcoding”) is a block of the processing

- When the caller must handle the failure of the called workflow (for example to release a resource), use `SubWorkflow`, or a launcher with Wait for completion and Fail if launched work order fails: without them, a launcher reports success once the work order is started.
- A republished sub-workflow is used by the next execution of its callers; no need to republish them.
- Refer to the called workflow by its UUID (`portable_id`) rather than its numeric id when workflows move between servers by import in the user interface or with `import_with_constraints`: the import keeps the `portable_id` of the file, unless a workflow of the target already has it *(4.1.6)*. The `import_workflow` API (`ascli orchestrator workflows import`) always generates a new `portable_id`: there, refer by id (see Referring to existing entities in the Workflow authoring chapter).
- Parameters of `WorkflowLauncher` are a hash: `{"param1"=>"value1", "param2"=>true}`; `CollectionManager` can build it.
- Never put a trigger with Continue monitoring in a sub-workflow: the sub-workflow is cloned at each event. Put it in the top-level workflow, or in a workflow started by a launcher.

2.3.5 Reusable building blocks


Build a library of tested workflows, each solving one problem: transcoding with a given product, checksum, Aspera transfer, notification. A new end-to-end workflow is then an assembly of tested blocks plus a trigger and some glue, and is ready quickly.

- Include a block with `SubWorkflow` when it is part of a processing, with `WorkflowLauncher` when it is started by a trigger.
- Make blocks configurable with parameters and lookup tables, so that the same block serves several cases (for example, the transcoding profile chosen from the source folder or from the media properties).
- Keep a workflow to 15 or 20 steps: easier to read, change and troubleshoot, fewer mappings.
- Do not create a sub-workflow for a single step: each call creates a work order. Share the step configuration with a template instead.
- Some teams run automated tests of their building blocks continuously against the current revisions.
- Duplicating a production workflow for a one-off variant can be the right choice: it avoids the risk of changing a workflow in production. Weigh that risk against the cost of maintaining two copies.

2.3.6 Naming conventions

Conventions save time, especially when several people work on the same workflows.

- Workflows: meaningful names, with a level marker for the call chain, and folders (like a file system) rather than everything at the root.
- Steps: meaningful titles, unique in the workflow. Letters, digits, spaces, dashes and underscores only, no accents. Rename the step before creating its configuration: the configuration takes the name of the step and cannot be renamed later.
- Variables and parameters: ASCII letters, digits and underscore (`A-Za-z0-9_`), no spaces, accents or dashes. Do not start a variable name with a capital letter: Ruby treats it as a constant. Prefix parameters with `p_`, so that a mapping list shows at once what comes from a parameter and what comes from a step, and write the names of configuration values in UPPERCASE.

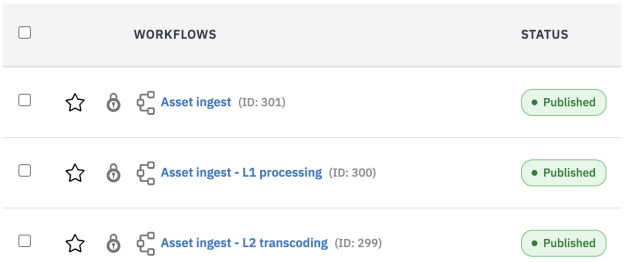

Workflow names with levels: the top workflow, then the L1 and L2 workflows it calls

- Inputs: names that mean something in the context of the workflow (`remote_base_folder` rather than `input_mount_point`).
- Work order labels: include the processed element (file or package name) (Meaningful status).
- Revision comments: what changed and who changed it.

2.4 Working in the designer

2.4.1 Changes and revisions

- Save creates a revision, with a comment: write what changed. Save often: even a workflow with errors is saved, which protects against browser crashes.
- Publish makes the last revision the one that runs. Publish also saves, without a comment; the comment of the last change can be edited later in the history.
- A workflow is not checked for logic errors when saved, only for mapping errors (for example a required input not mapped). A wrong type conversion, a starvation or a missing value appears only at run time.

Step configurations and workflow revisions are versioned separately. A workflow revision shows the current values of its steps, not the values at the time of the revision; the history of a configuration or template is in its own Revision log.

What you changed	What to do
A value in a step configuration or a template	Save the step. Effective at the next execution of the step, without publishing. A running trigger uses the new value at its next clone; reset its work order to apply it at once.
Steps, links, mappings, retries, timeouts, inputs or outputs	Save and publish. Run new work orders (new work order or relaunch).
Custom inputs or outputs of a step (for example of `CustomRuby`)	Saved with the step, but the workflow does not know them until you publish.
A sub-workflow	Publish it. Its callers use it at their next execution.
The designer says there is nothing to publish	Move a step slightly, then publish.


Reset reruns an existing work order with the revision it started with: it ignores new steps and mappings. Relaunch starts a new work order with the latest published revision and asks again for the runtime parameters; it exists only for top-level workflows. Bulk restart (in View by workflow) resets a group of work orders.

2.4.2 Configuration or template

Double-clicking a step offers New configuration (settings for this step of this workflow) or an existing template (settings shared by all the steps that select it).


- Use a template for what must be identical everywhere: configuration values, resource allocation and release, connection settings. Change it once and all workflows follow, without restart. A template survives the deletion of the workflows that use it.
- Use a configuration for settings specific to one step of one workflow (a watcher with its folder and pattern). A template that is too specific is dangerous: someone reuses it and changes it for another workflow.

- To change a template from a workflow, you must click Modify: a reminder that you change a shared object.
- Workflows > Workflow Actions lists the templates of each plugin; hover over the name of a template, or select Use in its menu, to see the workflows and steps that use it. A new configuration appears there after the workflow is published.

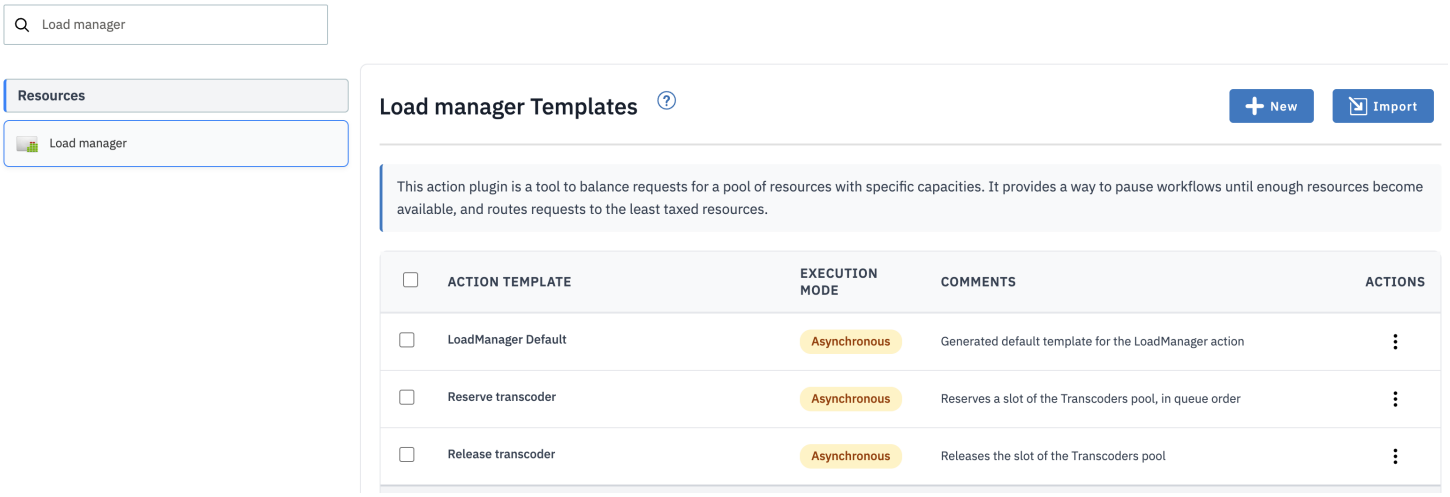

Workflows > Workflow Actions: the templates of the load manager plugin

- To turn a configuration into a template: right-click the step, Change Action Template, and click Make Global Template (globe icon) on the current configuration (its name is shown between stars).
- To detach a step from a template: Change Action Template, then Copy Template on the template: the step gets an independent configuration.

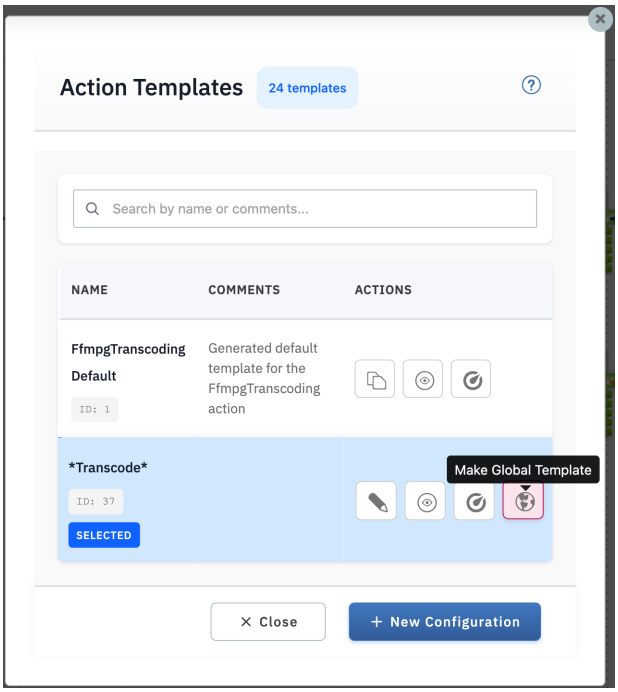

Change Action Template: the configuration of the step (*Transcode*) and the Make Global Template button

Duplicate a workflow (workflow list menu):

- Without Deep copy, the copy uses the same templates as the original: changing one changes the other.
- With Deep copy, configurations and templates are copied: the two workflows are independent. Sub-workflows called by the workflow are not copied; copy them yourself if needed.
- To experiment with a production workflow that you do not fully understand, use a deep copy. Otherwise, a deep copy defeats the single point of configuration.

2.4.3 Testing

- Test each block alone, with parameters, before adding the trigger and the callers.
- Test after each change. Link each new step to Complete and run the workflow before adding the next one: an error is then easy to locate.
- A step can be tested alone: in its configuration, enter input values, save them as a named test case, and Execute. The step really runs: a file is really moved, a REST call is really sent.
- To run a workflow up to a step without running the next one (for example a move), leave the next step waiting on a condition that is never met, check the outputs, then cancel the work order. Or route around the step with an OR to Complete.
- The work order view shows the inputs that a step not yet started will receive: check them before letting it run.
- Use test folders that no production watcher scans.
- Prefer a test server (for example a copy of the production VM with a temporary license and triggers disabled). Developing new workflows on a production server is acceptable if production workflows are not touched.

2.4.4 Designer tips

- The ? of each step opens the help of its plugin, with all its options.
- Add comments in the Comments field of steps: they appear in the printable documentation (Generate printable documentation: the workflow and all step settings on one page).
- A Note (sticky note) can be placed on the canvas, for example to flag something to discuss. It has no effect on execution. Do not clutter the canvas with notes.
- Right-click a link to change its line style: Manhattan Router (right angles, the default), Bezier Router (curve), NULL Router (straight line), Fan Router (straight lines spread apart when several links join the same two nodes). Manhattan links that share a path overlap, and the last one drawn hides the others; a Manhattan line can also cross a step. Use a Bezier curve where it makes the graph easier to read: this depends on the graph, it is not a rule. Give the failed and error exits of a step the same style: a curve beside a right-angle line looks odd.
- Use absolute paths, and end directory paths with `/`: a directory name without slash can be taken as a file name.
- When several users edit the same workflow, the last save wins. Lock the workflow (only administrators can unlock).
- A workflow can be deleted only when none of its work orders runs.
- Export the workflow after each major change, as a backup; the export takes the published revision.
- Enable only the plugins you use: the palette is easier to search and the memory footprint is lower. After enabling a plugin, click Engine > Force maintenance, so that the workers (not only the designer) know it.
- Browser password managers may fill credential fields of step and remote node forms without showing it, which causes authentication failures that are hard to explain.

2.5 Passing data between steps

2.5.1 Inputs and mappings


The Inputs tab of a step (or right-click > Map inputs) maps each input to a value, a parameter, or an output of a previous step.

- A value is given either in the step configuration or in the input mapping, not both. When both exist, the mapping wins, even when it is no longer displayed (older versions); remove the mapping first.
- The mapping list of a step shows the outputs of the steps linked to it, the outputs they carry through, and the global parameters. When an output is missing from the list, check the links first.
- Required inputs must be mapped: the save reports the unmapped ones.
- Removing a step or a link loses the mappings of the following steps. To remove a step in the middle of a workflow, change its type to a neutral step and keep its mappings. Adding a step does not break mappings, but see carry through.
- When exclusive branches join, map the outputs needed after the join on every branch.
- When two steps produce outputs with the same name, check which one you map.

2.5.2 Output visibility and carry through

In the designer, an output is offered only to the step immediately after the step that produces it. This keeps mapping lists short.

To pass an output further, open the next step, Outputs tab (right-click > Map outputs), and tick Carry Thru? for that output. Repeat on each step along the way.

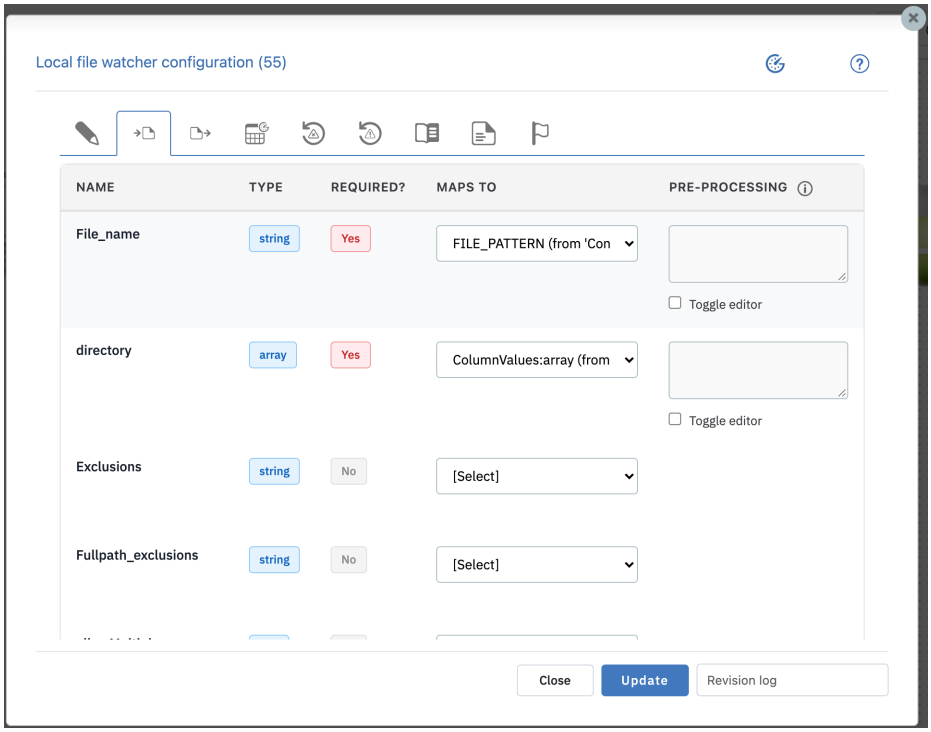

Inputs tab: each input is mapped to a parameter or to an output, with optional pre-processing code

This is a rule of the designer, not of the engine *(4.1.6)*: a workflow written as a file can map an output of any previous step without carry through (see Outputs in the Workflow authoring chapter).

Inserting a step in an existing workflow breaks the chain of carried outputs. In the new step, tick Select All Variables so that all carried outputs continue (except the step information outputs, which are rarely needed).

2.5.3 Using parameters


Parameters gives the definition of a parameter, its links and its runtime settings.

- Link parameters to Start: they become global, visible to all steps without carry through. A parameter linked to a step is offered only in the mappings of that step.
- Global parameters are read-only. To change a value, produce a new output (for example in `CustomRuby`).
- Give a default value when the parameter has the same value 99 % of the time.
- For an empty default value, leave the field empty; do not write `""`.
- Do not use parameter default values as constants shared by several workflows: use a global template (Configuration).

2.5.4 Using placeholders

Placeholders gives the syntax, the inputs that a placeholder creates, and their types.

- Check the Inputs tab after editing: a typing error creates an extra input, and a placeholder in a complex expression or in a field that is not scanned creates none.
- As soon as a placeholder is more than a name or a call on names, read each variable with `var(name)`: write `<%= File.join(var(dir), 'sub') %>`, because `<%= File.join(dir, 'sub') %>` creates no input and fails at run time (error ”no implicit conversion of nil”).
- Do not name the variable like an input of the plugin (use `<%= recipients1 %>` for a field `recipients`): it would not appear as an input.
- Useful methods: `File.basename(path)` (name with extension), `File.nakedname(path)` (name without extension, see CustomRuby), `File.dirname(path)`, `File.join(dir, name)`.
- In the body of a `RestRequest`, do not rely on conditions (`<% if %>`) or method calls such as `gsub`, which work only in some forms: prepare the values in a previous step.
- Computing a value in a field (for example a target folder `<%= File.dirname(package_dir) %>/transferring/`) saves a step, but the value is visible only when the step runs, and is tested only with real files and servers. A dedicated

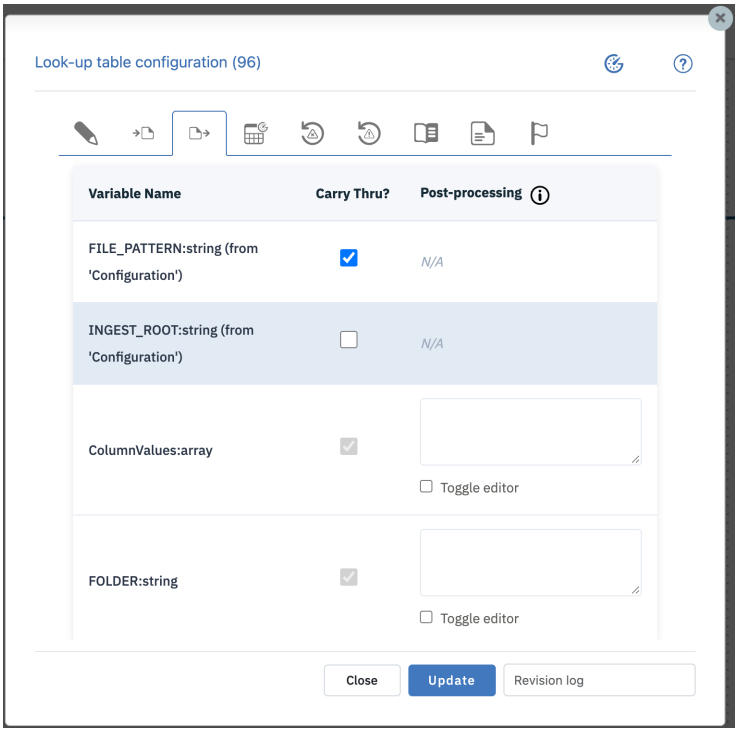

Outputs tab: Carry Thru? passes an output of the previous step (”from 'Configuration'”) to the next step


step (`ConvertPath`, `MassParameterSetter`, `FileInfo`) shows the computed value as an output and can be tested alone: prefer it when readability matters.

2.5.5 Types and conversions

Orchestrator is strongly typed: string, integer, date, flag (boolean), hash, array, password. Conversions are not automatic. They are needed mostly between a single value and a list: a watcher returns a path (string) and the next plugin wants an array; a lookup table returns strings and the next step wants a flag.

Pre-processing code on an input converts the value: the variable `input_value` holds the value and can be reassigned.

Conversion	Pre-processing
String to integer	`input_value = input_value.to_i`
Value to array of one element	`input_value = [input_value]`
First element of an array	`input_value = input_value[0]`
Element of a hash	`input_value = input_value['key1']`
Empty to empty array	`input_value = [] if input_value.blank?`
String generated as a Ruby hash	`input_value = eval(input_value)`

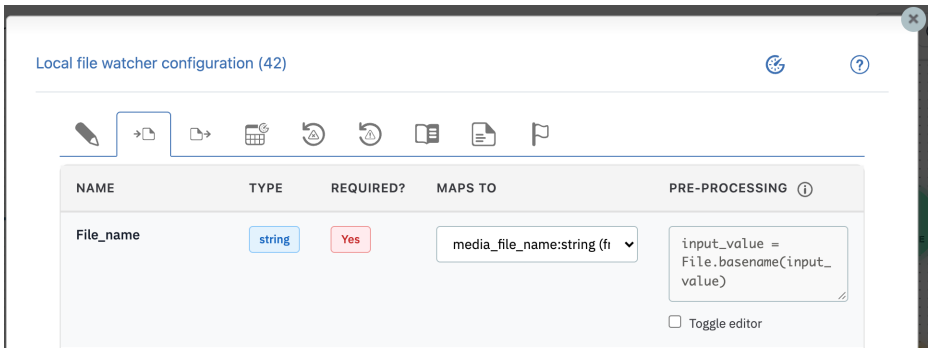

Pre-processing code on an input: keep the file name of a path

- Keep pre-processing short: it is hidden in the mapping. For more, use a step (`CustomRuby`, `InputManipulation`).
- Pre-processing must have no side effect. In the work order view, an input with pre-processing has a mark; Show result of pre-processing runs the code again.
- Wrong conversions fail at run time, not when saving.

Need	Use
Values identical for all executions (folders, e-mail addresses, URLs)	`MassParameterSetter` (stored parameter set), as a template.
Values that depend on a key (source folder, customer, variant, server)	`SimpleParameterLookup` (lookup table), as a template.
Address and credentials of a server	A remote node.
Values that differ between test and production servers	Environment variables in `MassParameterSetter` (below).
A secret	A runtime parameter of type `pwd`, a remote node or a secret reference: see Using secrets.

2.6.1 Stored parameter set


`MassParameterSetter` defines named values with a type. The following steps map the names; the values come from the step at run time.

- Make it a template, so that all workflows share it. A workflow may use a couple of configuration steps (for example one per subsystem).
- A value can contain placeholders, computed at run time from inputs, for example `VIDEO_FILE = <%= File.basename(package_path) %>`. Such a step replaces a `CustomRuby` that only derives paths and names, and a reader sees at once that it is configuration. A value cannot refer to another value of the same step: repeat the expression.
- The values can be read from a file under `/opt/aspera/var/config/orchestrator/actions_config/mass_parameter_setters/`, re-read at each execution, with lines `key: value`, the type in the name if needed (`count_int: 1`, `name_string: "222"`, `enabled_flag: true`).
- `<%= ENV["NAME"] %>` reads an environment variable declared in `orchestrator.yml` (`env_vars:`): the same workflow then runs on test and production servers with different values.
- Changing a name, or replacing a configuration by a template, requires redoing the mappings of the following steps.
- At the top level, read the configuration once; in the sub-workflows, use runtime or global parameters rather than carrying all values through.
- Prefer it to a lookup table when you are almost sure that there will be only one set of values: it is easier to read (one value per line) and to edit.

2.6.2 Lookup table

`SimpleParameterLookup` is one of the most useful plugins of Orchestrator. The first row holds the column names. The step searches the rows whose key column matches the input value, and returns the values of the first matching row as outputs.

- Map the input of the key column (for example `workflow_prefix`): without a key, no row matches and the step fails (`No configuration match`).
- The key is compared as a string: spaces count. Glob and regular expressions are supported; `*` as the last row gives a default.
- It replaces nested if-then-else, like a case statement.
- Typical uses: transcoding profile from the source folder or from media properties (height, bit rate, codec from `MediaInfo`), one workflow for several sites or variants (one row per variant), directories to watch.
- `ColumnToListValueFrom` returns all the values of a column as an array (output `ColumnValues`): give it to a watcher with multi-folder search, and add a folder by adding a row. Without a key, check Return array of rows?: the step then completes (with no row).
- `KeyForTableIndexing` returns the whole table as a hash indexed by a column (`IndexedTable.values` gives one hash per row).
- Fill every cell: empty cells are not handled well (use a default or `NA`).
- Values are strings, unless Support typed outputs is set and the column names have a type suffix (`value_int`, `value_flag`, `value_array`, `value_date`); the input stays a string.
- Do not use column names identical to the names of a previous `MassParameterSetter`.
- To add a value, add a column rather than change the meaning of an existing one: existing mappings stay valid.
- For large tables, edit a CSV file: export and import CSV, or set Param Filename to a file on the Orchestrator server, re-read at each execution (the UI then shows it read-only). Such a file is not in the database backup nor in the workflow

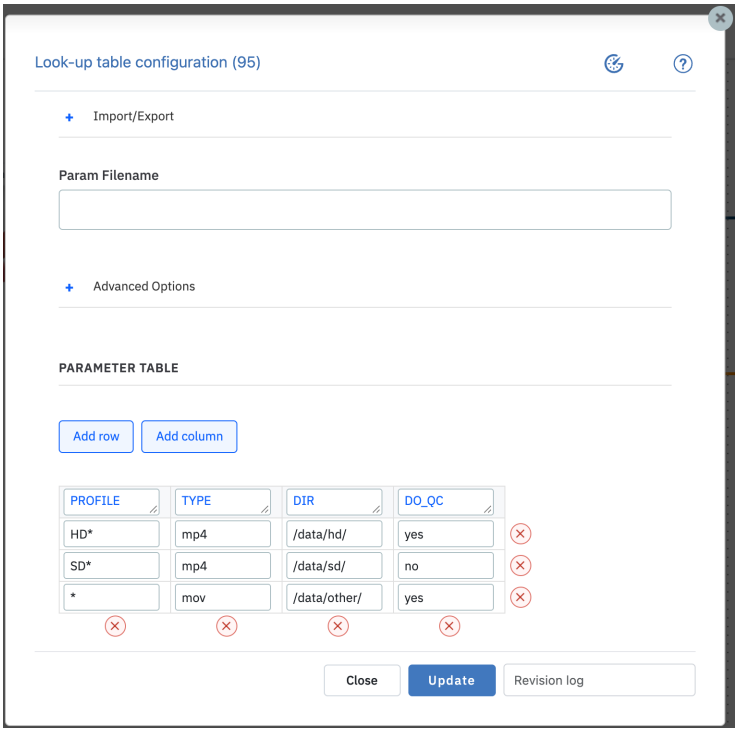

Lookup table: key column PROFILE with glob patterns and a default row *, value columns TYPE, DIR, DO_QC

export: keep it under `/opt/aspera/var`, which is backed up anyway.
- Write the first row in UPPERCASE, to recognize configuration values in mappings.

2.6.3 Remote nodes

Define each server once in Workflows > Remote Nodes: id, name, address, SSH or API credentials. Steps and lookup tables refer to the node, not to its address: when the address changes, you change it once.

- Refer to the node by its name or id, not by address. As a runtime input of a step, give the node id.
- Do not create two nodes for the same server.
- Secondary addresses turn a node into a simple load balancer: random, round robin, or primary/secondary (fallback). A keep-alive port is checked before use (for example SSH 33001, or the Node API port); without it, each use opens an SSH connection to check the node, which costs time and connections. A node has one login for all its addresses.
- With round robin or random, an asynchronous plugin that polls a remote job may poll the wrong node.
- Generate Certificate creates an SSH key pair, stored under `/opt/aspera/var/config/orchestrator/certificates/`.
- An SSH user with shell `/bin/aspshell` cannot run remote commands; use `/bin/bash`.
- With Windows nodes, the health check of balancing can leave SSH connections in `CLOSE_WAIT` until the SSH server refuses new ones: set the keep-alive port to `0`.
- In a high-availability setup, check connectivity (TCP, SSH, FASP) from both Orchestrator nodes.

2.6.4 Using secrets

Where a secret is stored and displayed depends on how it reaches the step: see Secrets.

- Do not write a secret in a workflow file, in a template attribute, or in a `Map_to` of type `value`: it stays in clear on the server and in exports. Leave the attribute blank: it becomes an input of the step (see Inputs of a step), and map this input to a parameter.
- Do not put credentials in a JSON body or a payload file: map them from a remote node or a runtime parameter.
- Give the secret when starting the workflow: a runtime parameter of type `pwd`, required, without `Value` (see Secret given at run time). The secret is then in no revision, export or Git push, and `workflow_inputs_spec` does not return it.
- For the credentials of a server defined as a remote node, refer to the remote node by name. For email, refer to a mail server configuration (`mailer_name`).

- To keep a secret in an external store, write a secret reference instead of its value.
- Name a runtime parameter that carries a secret so that the request log filters it: with `password`, `secret` or `token` in its name, for example `db_password`.
- In `CustomRuby`, declare the inputs and outputs that carry a secret with type `pwd`: they are masked on the work step page, and a `pwd` output is stored encrypted.
- Pass the secret in the JSON body of `POST api/initiate`, never in the URL: the access log of the web server records the URL. `ascli orchestrator workflows start` sends the parameters in the body. Do not type the secret on the command line (shell history, process list): read the parameters from a file, or from an environment variable, with `@json:@file:<PARAMS_FILE>` or `@json:@env:<VARIABLE>`.
- Do not put a secret in an output, in `@status_details`, in an exception message or in a log (`Rails.logger`, `puts`). Outputs are returned by the API, and the status details of a step are in its output `Step_information`.
- Do not count on masking to protect a secret: the web UI masks values only according to their type and name, and the API does not mask.
- Give the permission to view the workflow only to the users who may read its secrets: the API returns them decrypted.
- With Git, enable Protect Passwords on Push and set an export token (Orchestrator 4.1.7 and later). It protects `pwd` values, not template attributes.

2.7 Control flow

2.7.1 Exits and statuses

Each step has one entry and three exits (the statuses are in Statuses):

Exit	Status	Meaning	Example
Green	Complete	Success.	
Yellow	Failed	Expected functional failure: the application says no.	Quality control rejects the file; transcoder cannot convert the format; filter returns false; no row in a lookup table.
Red	Error	Unexpected technical error.	Server unreachable; required input missing; Ruby syntax error.

- The green exit of each step must be linked; the designer requires a path from Start to Complete.
- Failed and error exits are optional. An unlinked failed exit ends the work order as Failed with "No behavior defined for step status change to failed" (as if all unlinked failed exits went to Failed through an OR); same for errors.
- 80 to 90 % of the time, failure and error are handled the same way. The difference helps to notify the right people: the content owner for a failure, IT support for an error.
- Each plugin defines what is a failure and what is an error; check its help.
- Base decisions on the status, not on the text of the status message.
- The position of icons on the canvas has no effect: only links matter. Steps linked to the same exit run in parallel, in no guaranteed order.

2.7.2 AND and OR

Several links into a step (or an end node) mean AND: the step starts when all of them are activated. The OR operator (palette Connectors) starts the next step when one of its entries is activated. Double-click the OR to set how many entries must be activated ("n of m"); `0` means all (the symbol then becomes an AND) *(4.1.6)*.


Starvation: a step waits on an AND of links that can never all be activated, for example the complete and the failed exits of the same step. The workflow is published without error, the work order starts, and it never ends. Almost every workflow developer makes this mistake at least once. It is the first thing to check when a work order does not complete. `ascli orchestrator workflows check_import` reports it in a workflow file (`graph.starvation`).

Two exits of a step, joined without OR (never ends), and with an OR (correct):


A bypass: the filter skips operation 1 on failure. Both paths must join through one OR before Complete:

Rules:


- Join mutually exclusive branches (if and else, complete and failed, success path and error path) with an OR.
- All the entries to join go into the same OR: not one into the OR and another directly into the next step.
- Do not chain several ORs into one step: use one OR with the "n of m" setting.

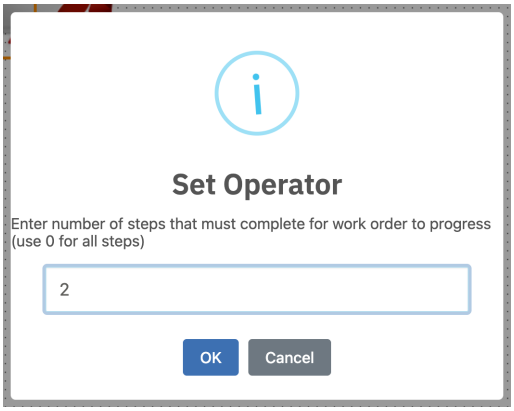


Double-click on an OR: number of steps that must complete for the work order to progress (0 for all steps)

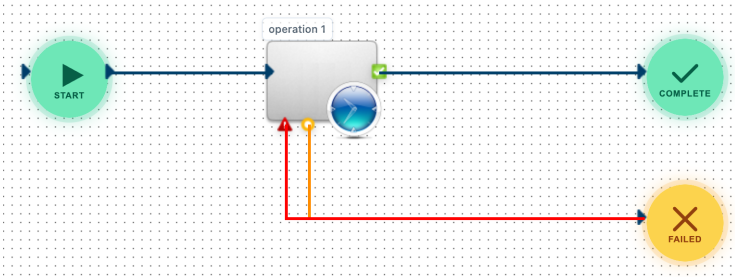


NO: the failed and error exits go directly to Failed (AND of exclusive links)

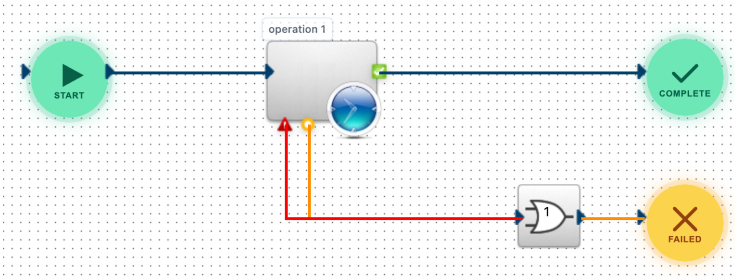

YES: the failed and error exits go to Failed through an OR

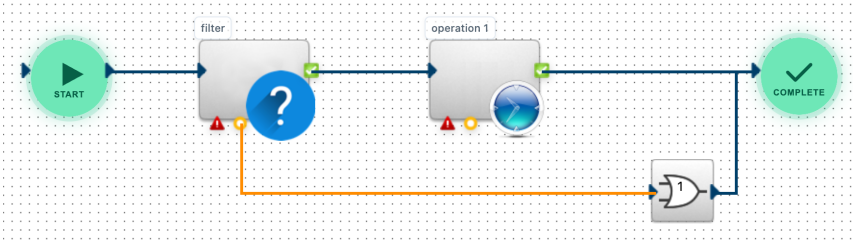


NO: Complete is reached directly from operation 1 and from the OR

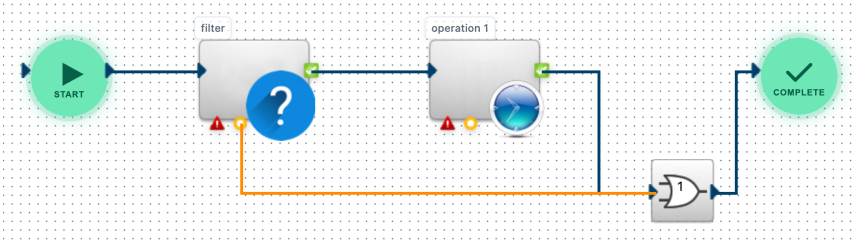


YES: operation 1 and the bypass join in the OR

- The designer refuses the last two cases *(4.1.6)*: Workflow saved with errors ("Step '...' is connected to a preceeding operator and can not also be connected to preceeding steps", "cannot be connected to more than one preceeding operator"), the links of the step to its other predecessors are not saved, and the workflow cannot be published until it is fixed.

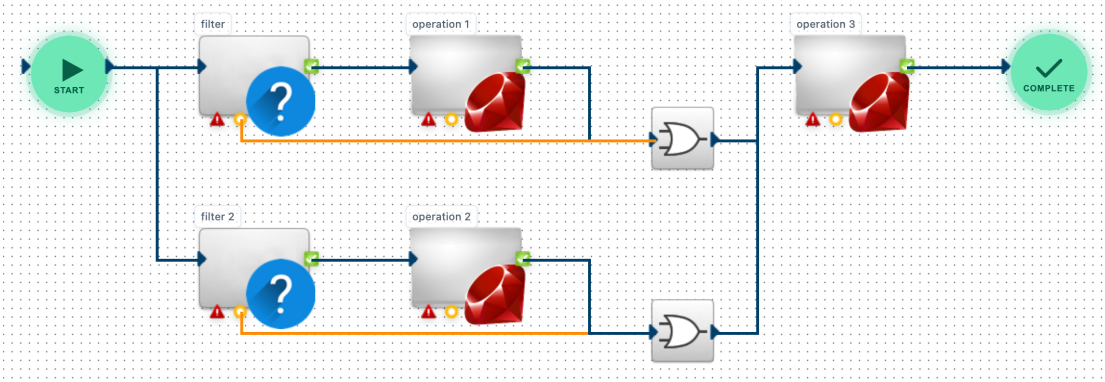

NO: two ORs feeding operation 3

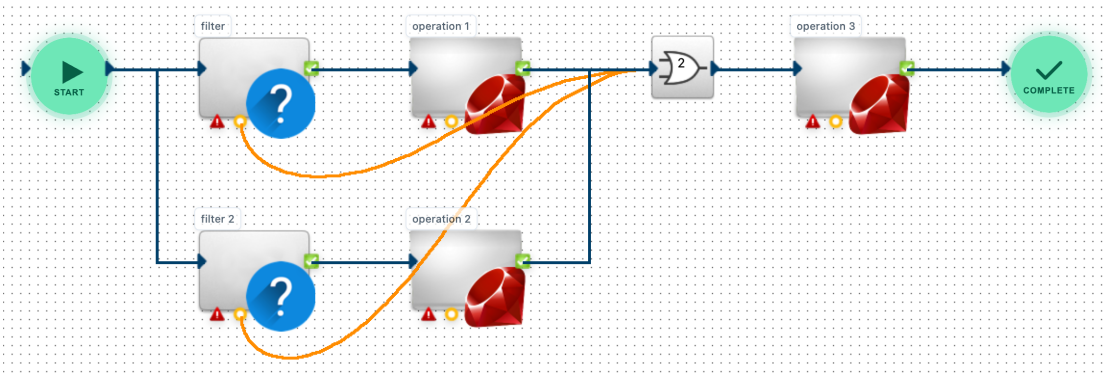

YES: one OR with 2 of 4 entries

Choose the join by the pattern of the incoming branches:

- Parallel branches, all of which run (a fan-out where several tasks run at the same time): leave the join step as an AND (`Synch_factor 0`). It waits until all the branches have completed.
- Mutually exclusive branches (an if and else condition, a route decision between alternative lanes, a nominal branch and an error branch): only one branch runs per execution. An AND would wait forever for the branches that did not run and the work order would never end. Use an OR with `Synch_factor 1` on the join step (or on `End` or `Fail`), so that it proceeds as soon as any one of the incoming branches completes.

In XML, the OR and its setting are the `Synch_factor` of the following node: see Prerequisites and branches.


2.7.3 Conditions

`Filter` is the if-then-else: its Ruby code returns `true` (complete exit) or `false` (failed exit). Inputs are read with `inputs['name']` and declared as required inputs with a type. Placeholders also work, but are replaced by text before the code runs: see Filter.


- Name the filter after the question it answers. Returning a flag named `should_fail` requires a negation (`return !inputs['should_fail']`), which is easy to get wrong.
- The failed exit of any step is also a condition: "if the transcoding fails, do this".
- A lookup table is the case statement (Lookup table).

2.7.4 Parallel branches


Steps linked to the same exit start in parallel. "Parallel" means put in execution: the actual concurrency depends on the free workers.

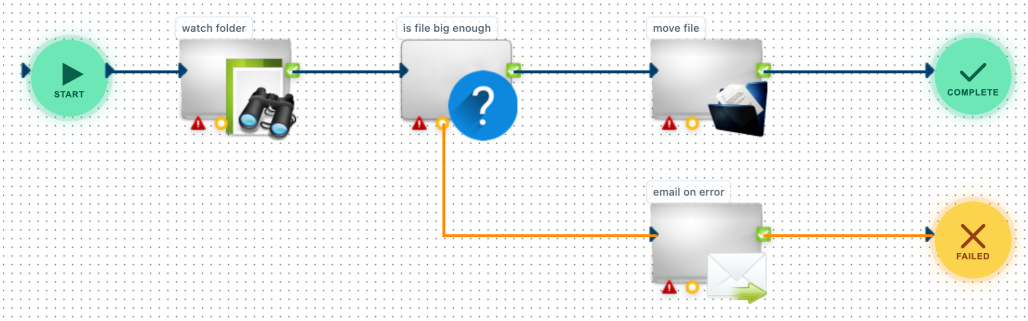

Filter: a condition on the file size; true moves the file, false sends an e-mail and fails

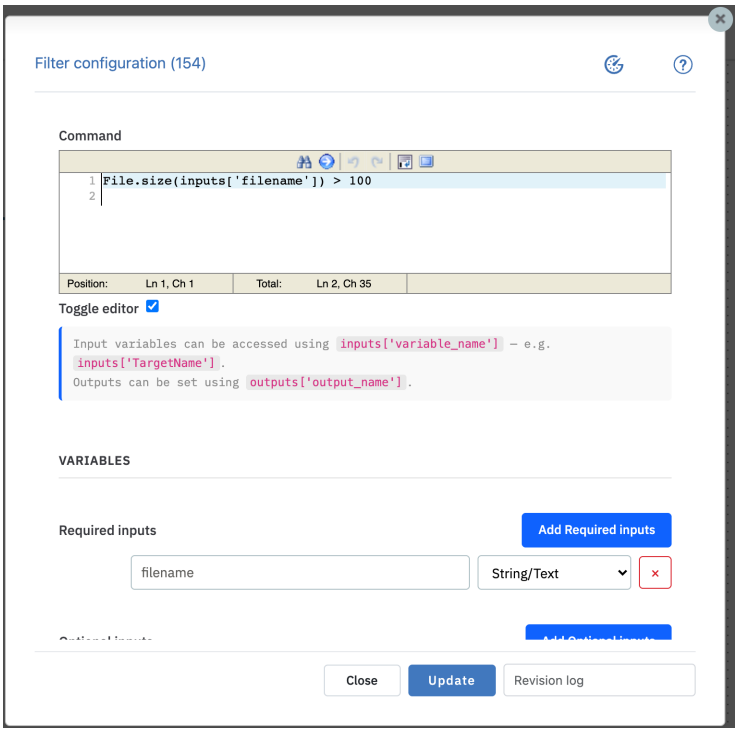


Filter configuration: code and required input filename

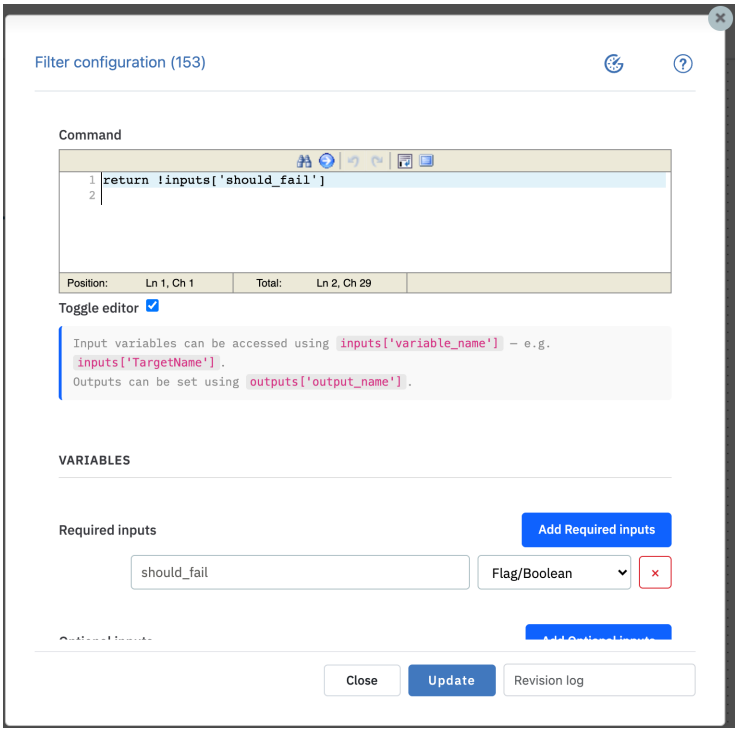


Filter with a negated flag


Join	Success	Failure or error of a branch
AND (no operator)	Waits for all branches.	The first unhandled failure ends the work order. Other branches become obsolete.
OR	The first branch to complete continues; the others become obsolete.	The first unhandled failure ends the work order, even if the other branch would succeed.
OR ”n of m” with all exits linked	Waits for all branches, whatever their result.	Same. Add a consolidation step that reads the step information of each branch.

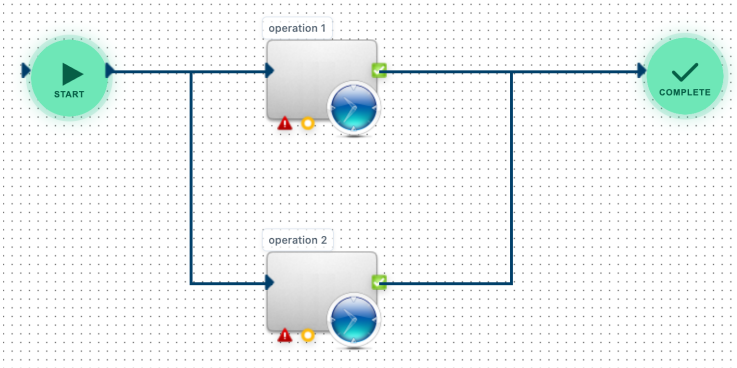


AND: wait for both operations

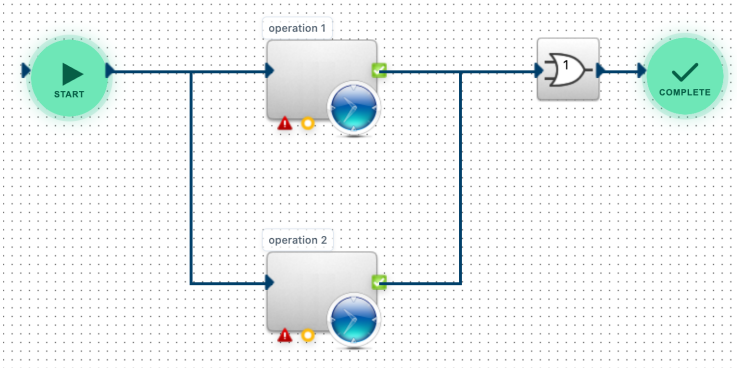

OR: continue when the first operation completes

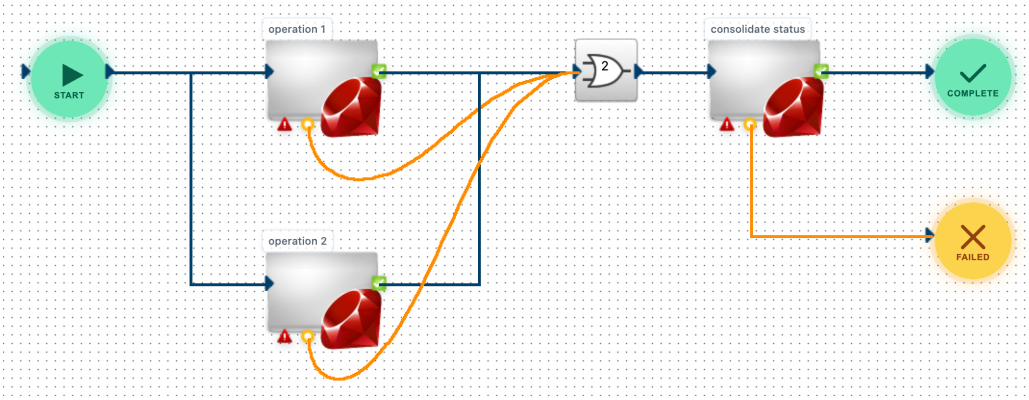

OR 2 of 4: wait for both operations whatever their result, then consolidate the status




NO: a link back from the condition to the operation

Re-queuing an element with a delay to retry later creates many work orders: avoid it for frequent retries.

2.7.6 Fan-out and funnel-in

`ArrayFanout` (+) runs the step that follows it once for each element of an array input; `Funnelin` (–) waits for all executions and continues.

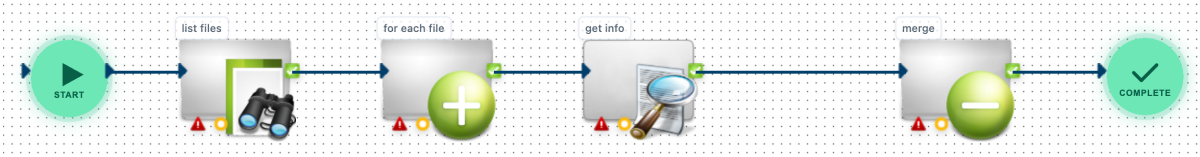

Fan-out (for each file), one step, funnel-in (merge)

Exactly one step between the fan-out and the funnel-in. With a second step after it, only the first step runs for each element: the second one runs once, after all executions of the first, with the first element, and the funnel-in sees one execution; the work order completes without error, and the other elements are skipped *(4.1.6)*. To run several steps per element, put them in a sub-workflow and call it between the two. The sub-workflow is then testable with one element, and the main workflow stays readable.

Configuration:


- Fan-out: Fan-out variable (the array input, for example `file_paths`) and Fanned as (the element, for example `file_path`, with its type).
- Funnel-in: declare the same variable as the fan-out (`file_path`), carry it through the middle step so that the designer offers it, and map it. The funnel-in outputs a hash of the status of each execution. This is mechanical: declare in the funnel-in what you declared in the fan-out.

Rules:


- By default the executions run in parallel; Execute serial runs them one by one, for heavy steps.
- By default (AND), the first failure ends the loop and the others become obsolete. To let all executions finish, link the complete, failed and error exits of the middle step to an OR before the funnel-in, then decide after the funnel-in (fail if one failed, or ignore). Select Fail if any failure in the funnel-in to report a failure.
- Handle the errors of each element inside the sub-workflow, not on the links of the sub-workflow step.
- An empty array makes the fan-out fail: test the list before (for example a filter `!inputs['asset_list'].blank?`).




NO: several steps between fan-out and funnel-in

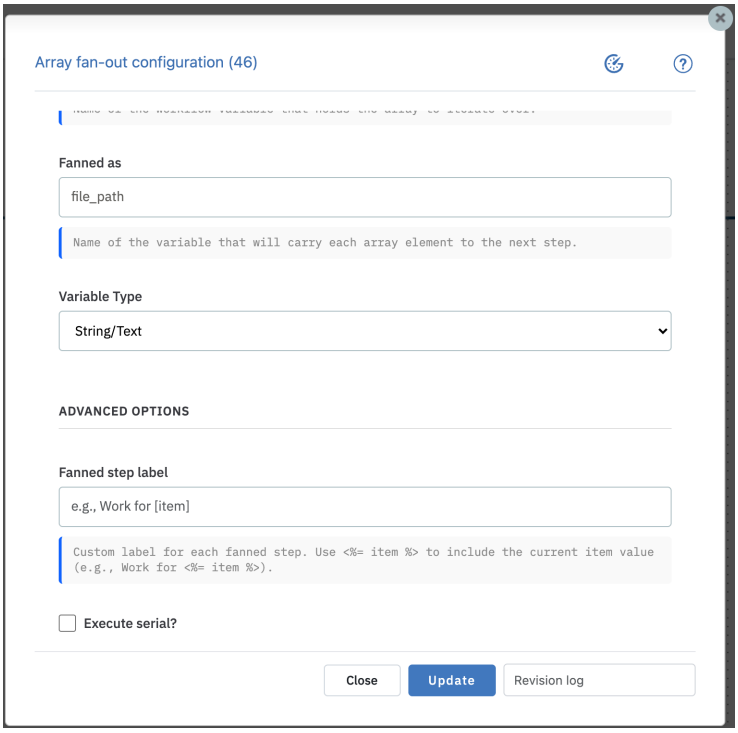


Fan-out configuration: Fanned as and its type, fanned step label, Execute serial

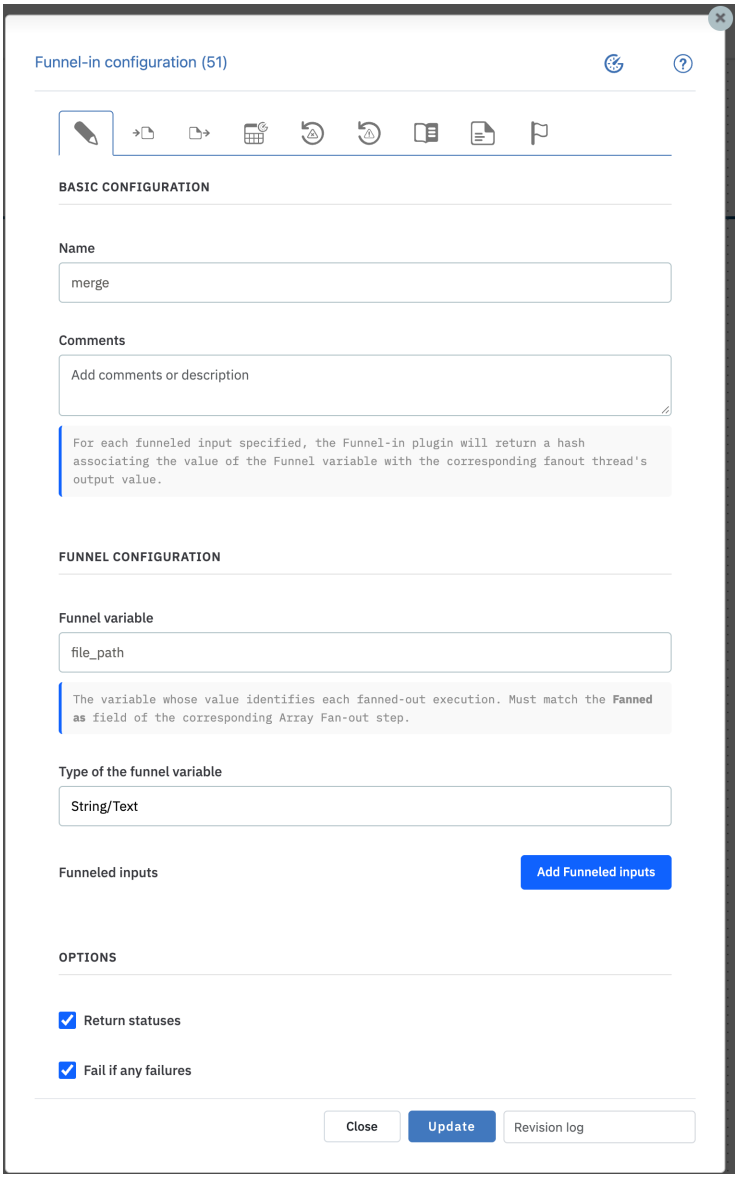

Funnel-in configuration: the same variable as the fan-out

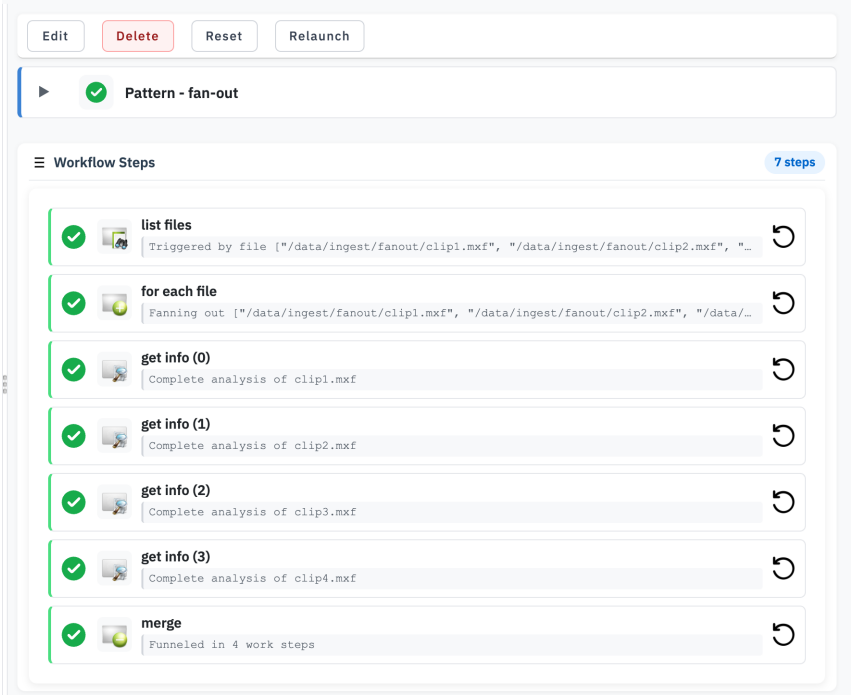

Work order: the fan-out runs ”get info” once per file, then ”merge”

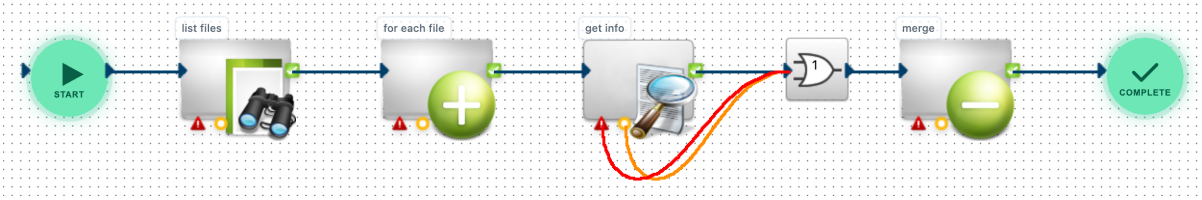

The three exits of the action join in an OR before the funnel-in


- Several values per element: an array of arrays or an array of hashes.
- A label such as `Processing <%= item %>` shows the element in the step title.
- Do not fan out hundreds or thousands of elements: each creates steps and database rows. Split the list, or queue the elements and process them with a resource pool (High volume).
- Do not give large lists (hundreds of kilobytes) to a fan-out.
- With `WorkflowLauncher` as the middle step without Wait for completion, no OR and no consolidation are needed: it succeeds once each work order is started, unless the launch itself fails.
- With a trigger that returns all matching files as a list, a fan-out processes them in parallel instead of one per polling period.

2.7.7 Waiting and timeouts

`ScheduleTrigger` has two uses:

- with Continue monitoring: a periodic workflow (every hour, every day at 5 p.m.), like cron;
- without: a delay inside a workflow (for example ”20 second(s) from now”).

Several rules (lines) combine as an AND; for example ”20 seconds from now” and ”second 1 of the minute”.

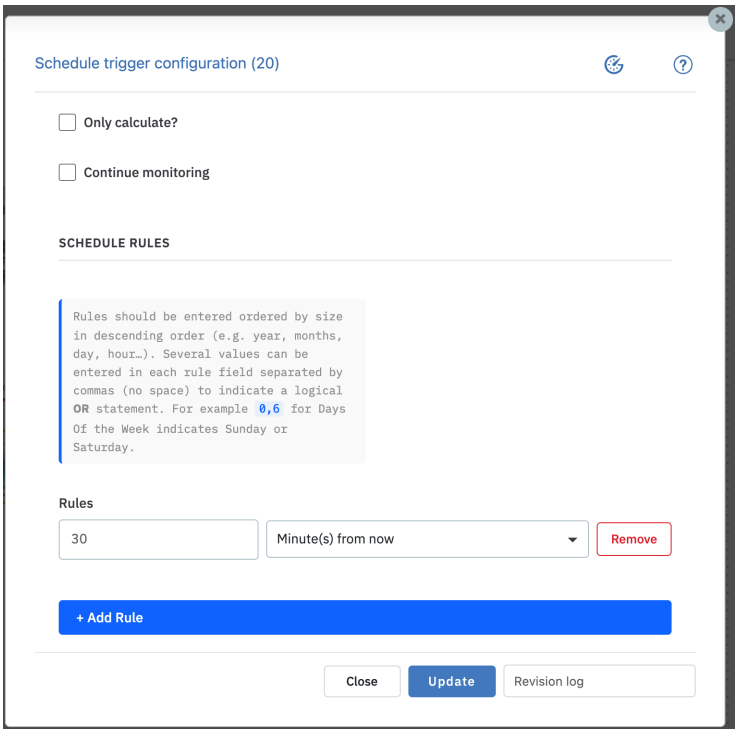


Schedule trigger configuration: a rule 30 Minute(s) from now

The timeout of a step does not limit a wait: for a watcher, it limits one scan of the folder, and it never fires because the file does not arrive (Timeouts). To limit the wait of a single trigger without Continue monitoring, make its timeout absolute. To limit the total duration of several steps, or to act during a wait, run a `ScheduleTrigger` in parallel:


The first branch to reach an end node ends the work order and stops the other branch (Terminal nodes). Orchestrator is not a real-time scheduler: do not expect precision to the second.

Escalation: a media file is expected after its XML side file. After 2 minutes, a reminder is sent and the wait goes on; after one hour, the work order fails:

- The step that waits receives several links: if they are exclusive, join them with an OR (in the figure, the OR before ”wait for media file”).
- The timer runs until the work order ends: the steps after the watched step must not take longer than the timeout, or the timer fires anyway. In that case, use the timeout of the step itself.

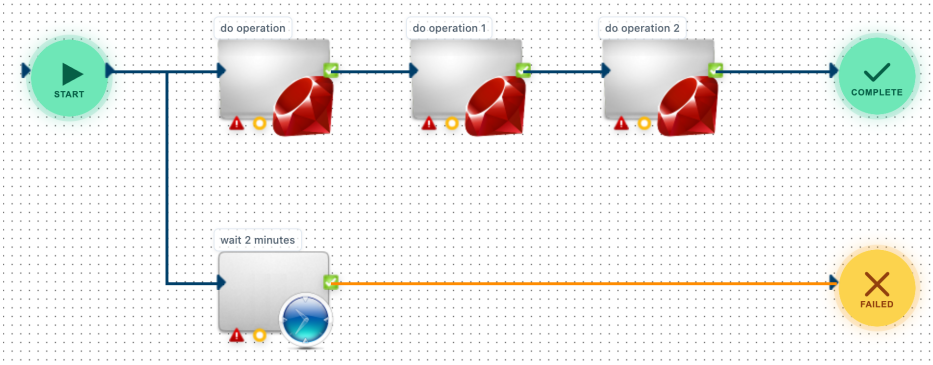


Cumulative timeout: three operations in parallel with ”wait 2 minutes”, which fails the work order

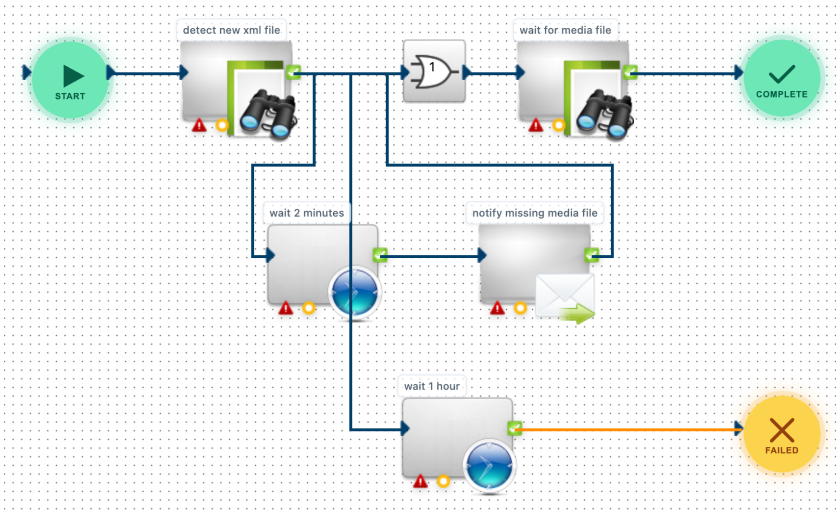

Reminder after 2 minutes, failure after 1 hour, while waiting for the media file

- When the timer is cancelled because the other branch completed, the timer step ends as failed: link its failed exit so that this does not conflict with the completion.

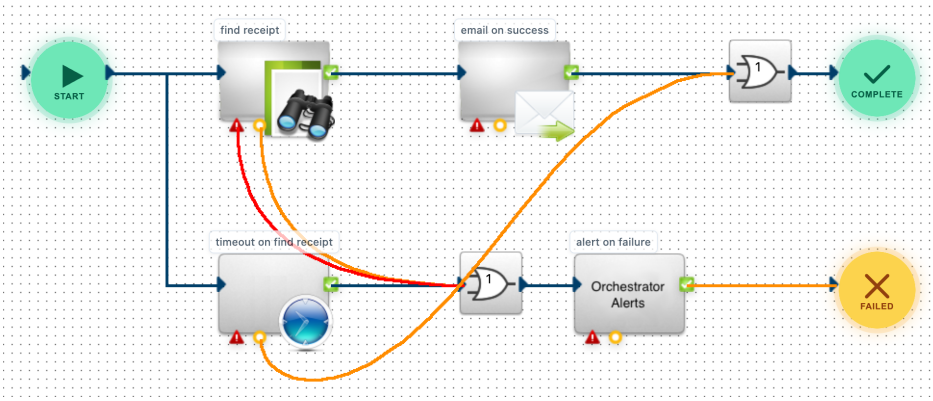

A schedule trigger as a timeout of a receipt search; its failed exit (timer cancelled) joins the success path

- Do not overuse a periodic `ScheduleTrigger`: each run creates a work order. To detect files, use a file watcher.

2.8 Error handling

2.8.1 Design for exceptions

Plan for the worst: the goal is a workflow that recovers by itself, or fails clearly, without calling support. If there is one rule to remember: protect yourself.

Ways to report an issue: e-mail, Slack, Jira ticket, journal entry, alert, log file read by a log collector (Splunk, Elastic), metrics database (InfluxDB with Grafana), custom table shown in a dashboard, REST call. Ways to recover: retry, move the file to an error folder (operators can drop it back), an operator decision (Human interaction), a fallback resource (Resource management).

2.8.2 Using retries

The retry tabs of a step, one for failure and one for error, set the number of attempts, the retry duration and the delay between attempts (Retries).


(4.1.6) The designer opened from the list of workflows shows Retry Duration empty, and saving the workflow there drops it (attempts and delay are kept). Enter it again before saving, and check it in the Revisions tab, which shows it.

- A retry happens only if the exit is linked, at least to an OR that leads to an end node.
- Link a notification to the failed exit: it is sent once, after the last attempt, not at each attempt.
- Retrying a functional failure is usually useless: the transcoder will reject the same file again. Retry errors (network, server restart).
- Synchronous steps interrupted by a restart of Orchestrator cannot resume (”Recovery after partial execution is not supported”): a retry on error covers this case.
- To retry depending on a status code or message, put the action and a filter on the code in a sub-workflow, and set the retries on the sub-workflow step.
- Some versions retried forever when a required input was missing with retry on error set. The workaround is `input_value = "" if input_value.blank?` in the pre-processing of required inputs.


2.8.3 Using timeouts

Timeouts gives the possible values, the default, and the statuses on timeout.


- Set the timeout of synchronous steps above their expected duration: do not rely on the default, which can be only 60 seconds.
- For triggers, choose error on timeout: a failed trigger with Continue monitoring starts a new work order, and a timeout loop follows.
- An absolute timeout cannot be set on a sub-workflow step with retries: use a parallel `ScheduleTrigger` (Waiting and timeouts).

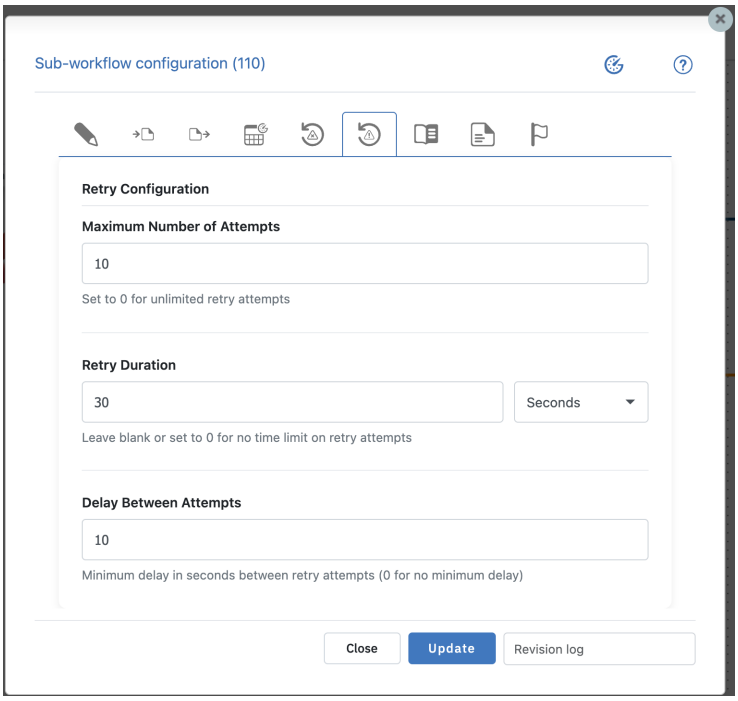

Retry tab of a step: 10 attempts, for 30 seconds, every 10 seconds: the 30 seconds stop the retries first

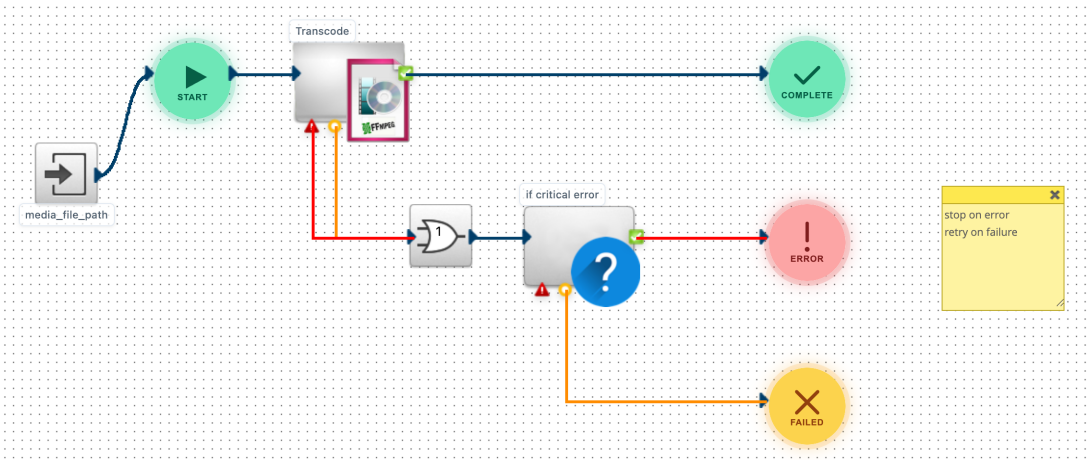

Retry on failure of a sub-workflow; the sub-workflow decides whether an error is critical

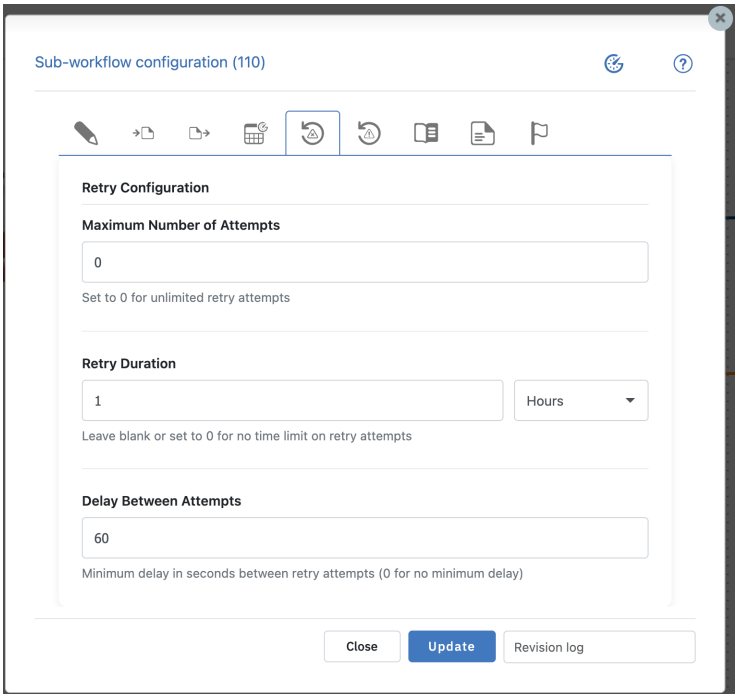

Retry settings of the sub-workflow step: unlimited attempts on failure, for 1 hour, every minute

2.8.4 Cancel

- Cancelling a step stops its action only if the plugin implements cancel (for example `RemoteExecution` with Is cancelable, not the FTP plugins); the step and the work order then end as failed, and the failed exit is followed.
- Cancelling the work order does not follow the failed exits of its steps.
- A remote command is not stopped when its work order is destroyed or cancelled, unless it is cancelable.

2.8.5 Meaningful status


By default, the work order list shows only ”Work order ended with status complete”, or ”No behavior defined for step status change to failed”, and the reason of a failure is deep in the sub-workflows. Exposing the right information at the right time is as important as getting the job done: for support, for changes, and for the person who takes over.

Work order label. `WorkOrderMetaData` changes the label (title) and tags of the work order, for example `Processing <%= File.basename(file_path) %>`. The work order list shows the workflow name and the status message; the label follows the workflow name in the work order view, and the filter Title searches it.


- Filtering the work orders by title is fast, even with 100 000 work orders. Filtering by keyword searches every input and output of every step, and can take minutes.
- In a sub-workflow, select Change label of top-level work order: filters see only top-level work orders. Do not add tags from sub-workflows called many times when tags are appended (option): the tag field of the top-level work order fills up.
- The label is limited to 255 characters: truncate with `[0...254]`.
- With `WorkflowLauncher`, set the label in the launcher instead.
- Outputs: `master_id` is the id of the top-level work order, `work_order_id` the id of the current one.
- Goal: from the work order list and its filters alone, know which element, which variant and which workflow: name the element in the label and in the status messages (exit status).

Exit status. `ExitStatus` sets the status message of the work order for complete, failed and error ends (255 characters, with placeholders).


- The message applies only if the `ExitStatus` step ran before the end: a step placed after a failing step never runs.
- Either place one `ExitStatus` early, once the outcomes are known, or (usually clearer) place one before each end: one for complete, one per failure reason. Do not multiply them (10 or 15 become confusing).
- Fill only the box that matches the end it precedes.

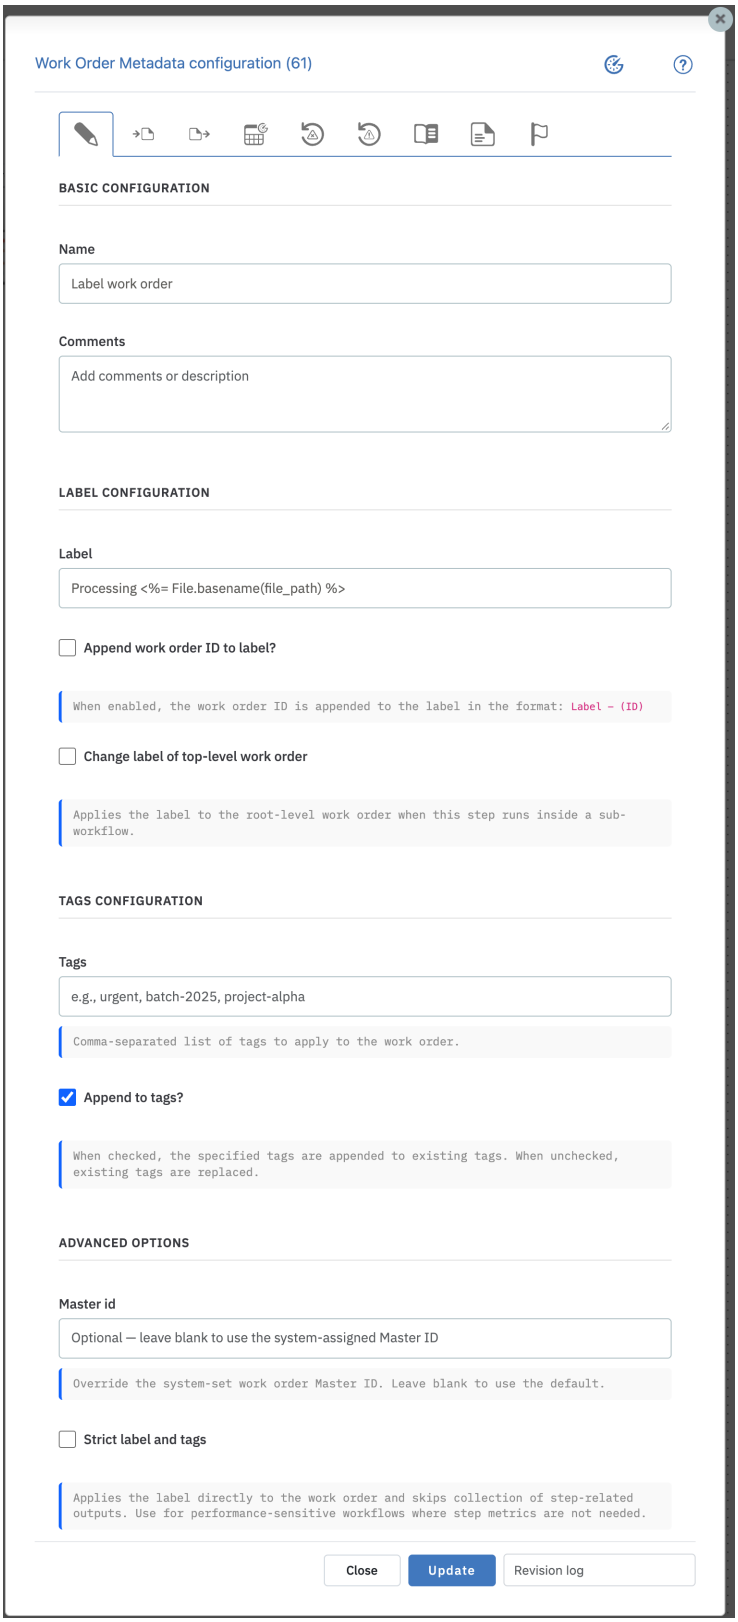


WorkOrderMetaData: label with the file name

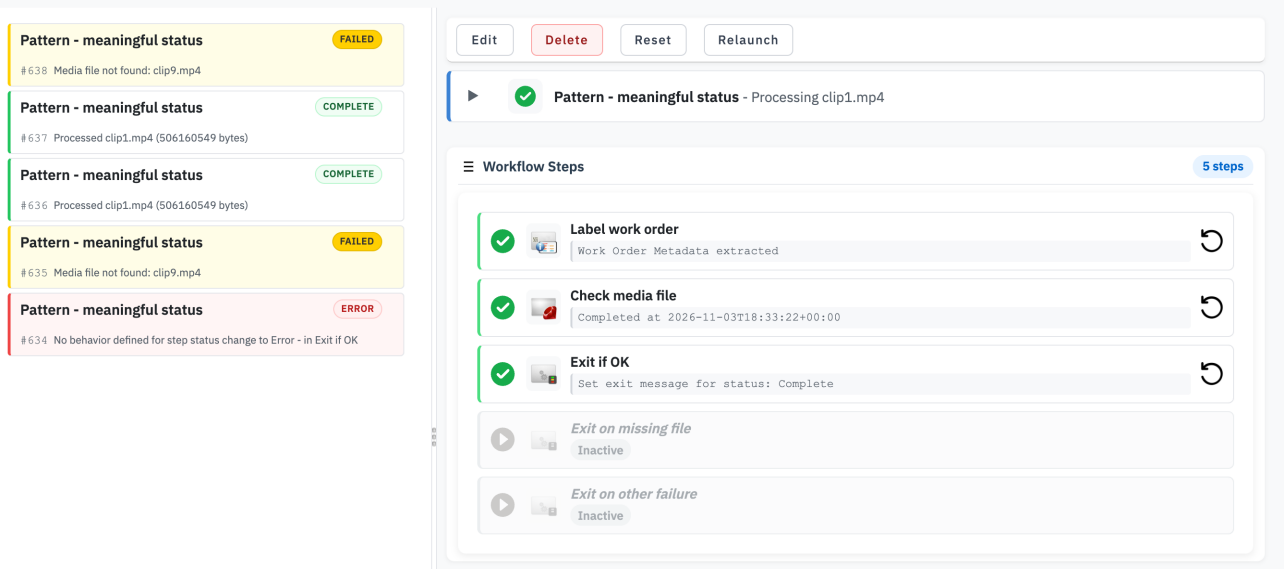

Work orders filtered by title ”Processing”: the label follows the workflow name in the work order view

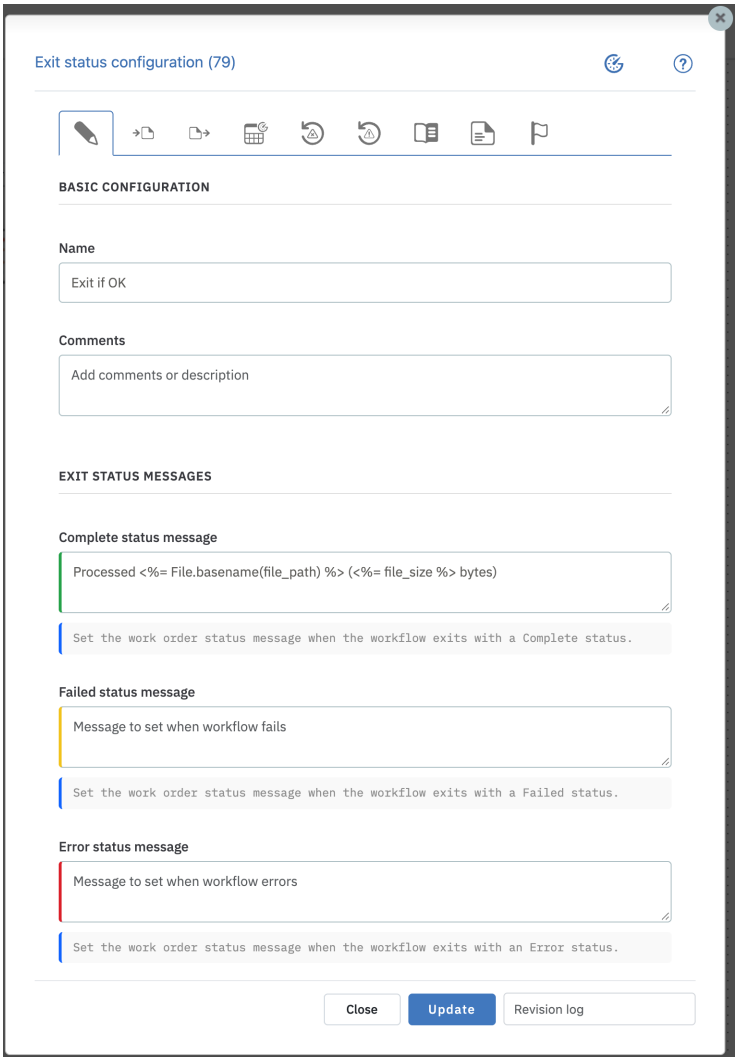


ExitStatus before Complete: only the complete message is set, with placeholders



Status messages in the work order list: set by ExitStatus (complete, failed), and the default message when no exit handles a step error

- In sub-workflows, use End with workorder status on the caller and an explicit link to the failed or error end with an `ExitStatus`, so that the message goes up the chain.
- Adding an `ExitStatus` at the end of an existing workflow is low risk: the processing is done before it. Changing the beginning of a production workflow is high risk.

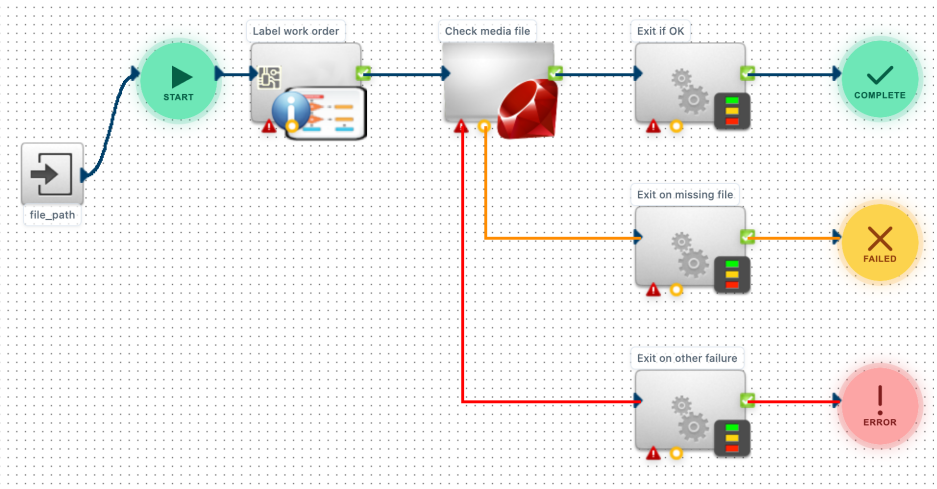

One ExitStatus before each end: ”Exit if OK”, ”Exit on missing file”, ”Exit on other failure”


The step information output of a step (`Step_information`) can be customized in its output post-processing, for example `output_value['step_status_details'] = "a message"`, and consolidated in a final step.

2.8.6 After a failure

- Restart a work order from the work order view: Reset (same revision), Relaunch (latest revision), or restart from a step (error-prone in a single when-and-what workflow) (Changes and revisions).
- Fix the cause of a work order manually, then change its status (work order view: Edit, then Change Status): this documents the case in Orchestrator instead of e-mails.

Status	Use
Cleared	The failure was handled manually; write the resolution in the comment. This is the status used in almost all cases. Do not set Complete when not all steps ran: it is misleading.
Flagged	Keep the work order: it is never purged, even with a workflow purge of 0 days. Use it rarely and write down why: thousands of old flagged work orders made a database slow.
Rolled-back	The action was undone (for example the file was moved back to the watch folder to be detected again). Rarely used.

- External monitoring through the API may require a manual status change, for example during maintenance.
- Non-administrators need the permission `Aspera:Orchestrator:WorkOrder:edit` to reset work orders.

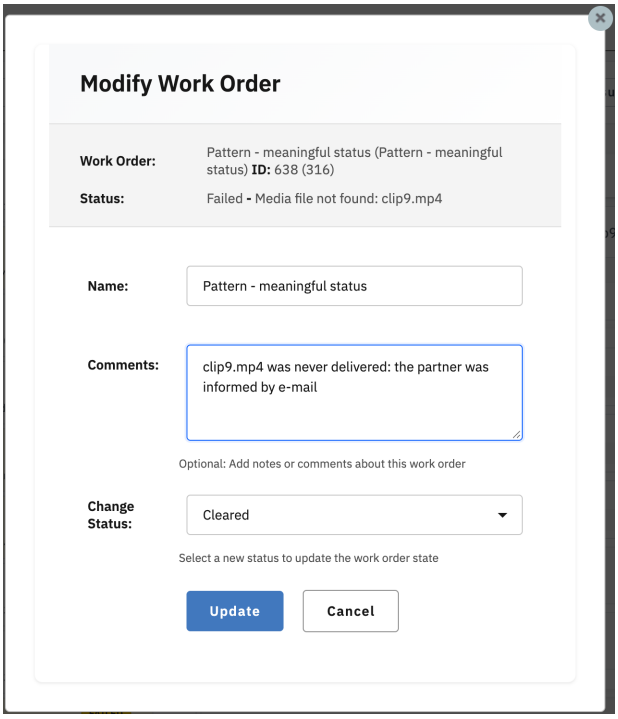

Modify Work Order: status Cleared, with the resolution in the comment

2.9 Using triggers

2.9.1 Continue monitoring

All triggers have the option Continue monitoring (Keep trigger ongoing in older versions); Triggers describes the work orders it creates.


- Not selected: use it inside a workflow to wait once for something, for example a folder whose full path is known (even for days).
- Selected: use it to process every new element, each one in its own work order.

- With a long polling period, return the elements as a list (Return all matching files, or return elements as a list) and use a fan-out: otherwise the work orders start one after the other, about two polling periods apart.
- Polling every 2 seconds is too often, especially for remote watchers (one SSH connection per scan); keep the default (5 seconds) or use 10 seconds.
- A watcher runs until a manual action (cancel, pause, destroy) or an error stops it: add a workflow monitor to restart it (Monitors).

2.9.2 Persistency scope

The persistency scope sets the memory of a trigger: which elements it has already detected, so that it does not detect them again. History of past triggers gives what each scope shares; this table gives when to use it:


Scope	Use
by workorder group (default)	Files moved out of the watched folder after detection. To reprocess the files left in the folder (after a failure), restart the trigger.
by workflow	Files that stay in the folder. Touch a file to detect it again.
by step	Two watchers on the same folder in one workflow, with separate histories.
by action template *(4.1.6)*	Steps that share a watcher template must not process the same element twice.
absolute	Two workflows on the same folder must not process the same file.
none	Only a trigger without Continue monitoring that waits for a file that may already be there.

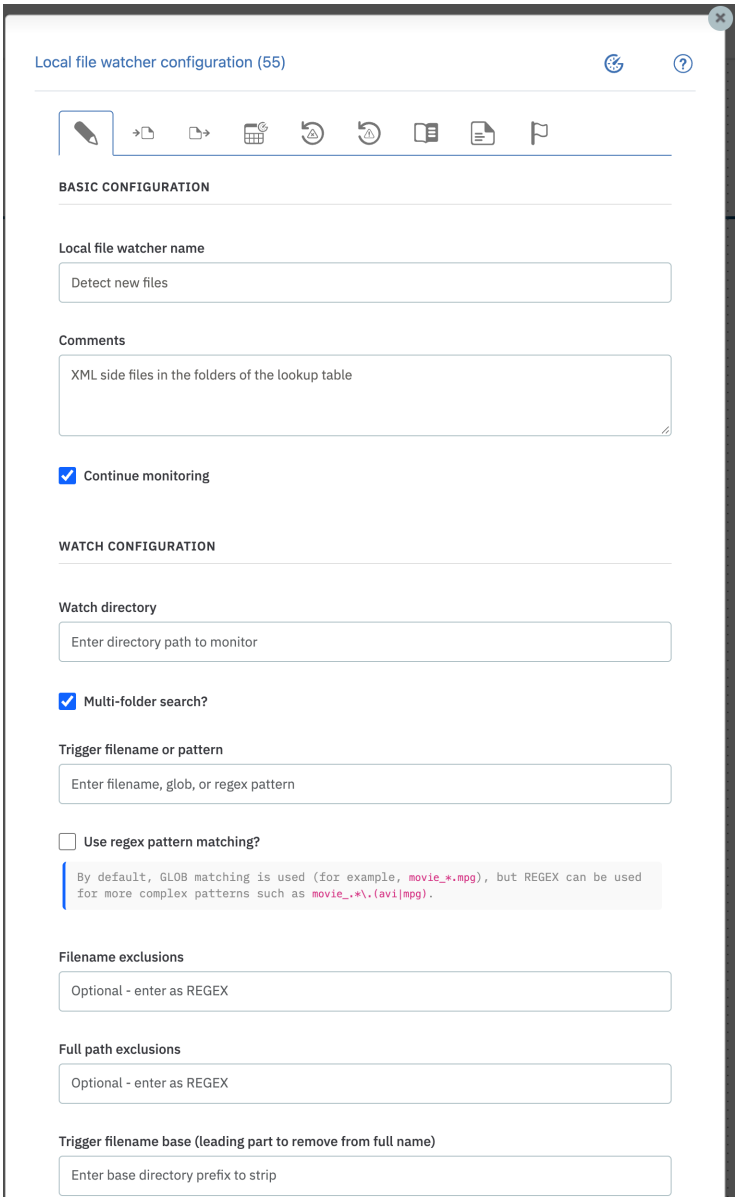

Local file watcher: Continue monitoring, watch directory, multi-folder search, glob or regular expression

Never use scope none with Continue monitoring: the same file is detected at each scan, and each detection creates a work order. In one real case, 15 000 work orders were created for one file within an hour; the server stopped responding, and the license had to be removed so that Orchestrator would start without processing.

- In a template written as a file, write Remove trigger file explicitly: left blank, `LocalFileWatcher` keeps no history, whatever the scope, and with Continue monitoring it behaves like scope none (LocalFileWatcher).
- When several Orchestrator servers share the work, set `persistence_mode: db`, so that the history is in the database instead of on disk.
- Two triggers in the same work order group see the same history: a second trigger on the same element (for example the start and the end of the same transfer) needs scope none, and no Continue monitoring.




Transfer start (Continue monitoring, by workorder group), then transfer end of the same transfer (scope none)

- For a trigger called several times in a sub-workflow (without Continue monitoring) that must return a different element each time, use scope by step.

2.9.3 Rules for triggers

- Only one trigger with Continue monitoring from start to end, in the workflow and all its sub-workflows. Two of them clone each other: 1, 2, 4, 8 work orders, and the server collapses. Several independent watcher workflows started by a launcher are fine.
- Only one watcher in progress per detection point: two watchers on the same folder detect the same files (unless scope absolute).
- Move the detected files out of the watched folder: detection folder, in-progress folder, and one folder per outcome (done, failed, error). This is an extremely good design habit. If files must stay (existing process), use scope by workflow.
- Ignore files being written: exclude their temporary extensions (`.partial`, `.aspx`) in the pattern.
- When your workflow writes into a folder watched by another system, write the file with a temporary extension or in another folder of the same file system, then rename or move it (atomic on the same file system).
- Handle duplicates if needed (a marker file or a database record): copying the same file again into the folder makes it newer, so it is detected again.
- A trigger with Continue monitoring is usually the first step of a workflow. It can be followed by triggers without Continue monitoring that wait for dependent files (`DependencyChecker` checks that all files of a list exist).
- To accept one file or another, link the failed exit of a first `DependencyChecker` to a second one, and join their complete exits in an OR: the work order fails only if both files are absent *(4.1.6)*. Set `timeout_in_sec` on both: a `DependencyChecker` fails only on its timeout, and without one (the default) it waits for ever. The second check starts when the first one times out.

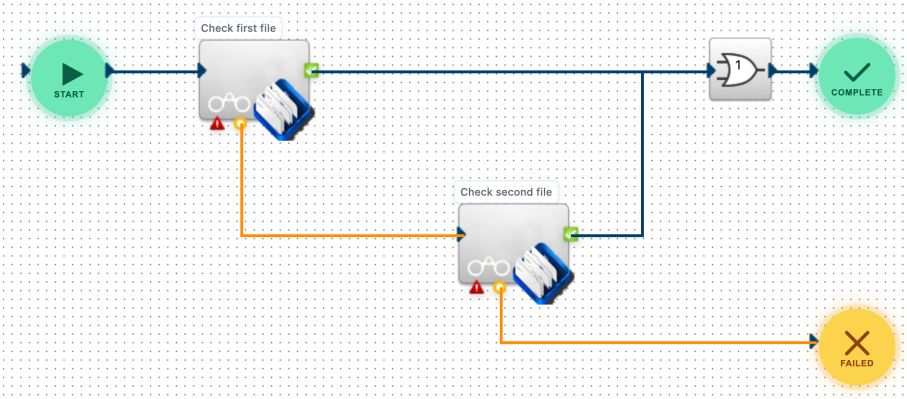

One file or another: when the first check times out, the second one runs; the work order fails if both files are absent

- A watcher configuration change applies to the next clone; reset the waiting work order to apply it at once. A code change (new steps) requires cancelling the waiting work order and starting a new one; files still in the folder are then detected again with the default scope.

2.9.4 Choosing a watcher

Watcher	Requirements	Notes
`LocalFileWatcher`	The folder is local or mounted on Orchestrator (mount manager, `/etc/fstab`).	Glob by default (`**` for subfolders), regular expressions optional; one file by default; multi-folder search. The user that runs Orchestrator (`aspweb` in 4.1.6) must be able to read the folder, and to delete or move the files.
`RemoteFileWatcher`	SSH access and the Aspera transfer software (`ascmd`), no transfer license needed.	Regular expressions; Descend in sub directories; returns a list; multi-folder search. Paths are relative to the docroot of the SSH user. One SSH connection per scan and per folder.
`AsperaNodeFileWatcher`	Node API user on a licensed, running HSTS (HTTPS).	No SSH port to open; REST calls. In 4.0, one folder only. Paths relative to the docroot of the node user.
`AsperaNodeApiTransferMonitor`	Node API (HTTPS).	Transfers on a node; tag filters (for example Faspex inboxes). For uploads by clients, direction `receive` and type `download.ended`. May fire again after a relaunch (events are kept).
`AsperaCentralWatcher`	Central API (port 40001) or Node API credentials (preferred, HTTPS).	Transfer start or end; can filter error sessions. Needs a monitored remote node.
Faspex, Aspera on Cloud package watchers	Application credentials.	Aspera packages, not folders. For a folder that forms a package (for example an `.itmsp` folder), watch for new folders.
FTP, SFTP, e-mail, database, message queue triggers	Access to the system.	E-mail when the e-mail is the contract with the provider; database when an application writes orders in a table.
`RestRequest` with Continue monitoring	A REST API that lists new items.	Set a record id, else the same records start new work orders forever.
`ScheduleTrigger`		Periodic workflows.

- Prefer local or Node API watching to SSH watching for performance and security. When possible, ask for an SSH user whose docroot is `/`: absolute paths are easier to write and read. SSH connection sharing (multiplexing) at the operating system level reduces the cost of SSH watchers.
- A local or remote watcher should not scan more than about 20 folders, especially network mounts, and more than about 20 remote watchers degrade performance.
- One watcher per region with a lookup table of folders is easier to maintain than one watcher per folder.
- A watcher does not detect transfers done by Aspera Sync or Drive (transfer monitors); on a shared storage behind several servers, watch the storage once rather than each server.
- An external application can call the API instead of being watched (Integration API): no watcher, no polling.

2.10 Files, transfers and remote execution

2.10.1 File operations

Method	Requirements	Notes
`LocalFileOperation`	Source and target visible on Orchestrator (mounted).	Synchronous, no progress.
`RemoteFileOperation`	SSH and `ascmd` (Aspera transfer software) on the remote host.	Paths relative to the docroot of the SSH user.

Method	Requirements	Notes
`AsperaNodeApi` operations	Node API user.	Application-level authentication, REST, no SSH: preferred.
`RemoteExecution` of a command	SSH only.	Any command (copy, `ftp`, `sftp`, `robocopy`).
`FaspTransfer`, `AsperaNodeApiTransferOperation`	Aspera nodes.	For transfers between servers.
`ArchiveManager`		Delete files older than a period in a folder.

Remote plugin	Authentication	Shell	Docroot applies to paths	Uses `ascmd`	Aspera software on the host	Aspera license
Remote file or folder watcher	SSH	`/bin/bash` or `/bin/aspshell`	Yes	Yes	Yes	No
Remote file operation	SSH	`/bin/bash` or `/bin/aspshell`	Yes	Yes	Yes	No
Remote execution	SSH	`/bin/bash`	No	No	No	No
FASP transfer	Node API user (none with Central)		Yes	No	Yes	Yes

Pitfalls:

- Copying or moving a folder into an existing folder of the same name nests it: copying `/root/a/` into `/a/` gives `/a/a/`. A target ending with `/` moves the source folder into the target folder.
- A move across file systems is a copy and a delete (slow); within a file system it is immediate.
- A local move can report success while the source file remains (no right to delete it on a mount): check with `FileInfo` if needed.
- The output of a remote move is an array of paths: take the element you need.
- On Windows nodes with an SSH docroot `C:\`, refer to `C:\temp\file.txt` as `/temp/file.txt`.
- The FTP plugin runs on Orchestrator and can be slow: running the `ftp`, `ncftp` or `sftp` client of a remote system with `RemoteExecution` spares Orchestrator.


2.10.2 Transfers

- In `FaspTransfer`, the node is the one that performs the transfer (upload or download), not necessarily the destination.
- `FaspTransfer` offers a generic form with all transfer options, or a predefined XML payload file for special cases; after choosing a payload, refresh the step so that its inputs and outputs follow the variables of the payload. Keep destinations and credentials as variables, not in the payload.
- Use Node API credentials, and source paths relative to the docroot of the transfer user tied to the node user.
- `AscpClient` reports progress but runs only on Orchestrator.
- Console smart transfers can be started with `ConsoleSmartTransferOperation`; transfers that are not Aspera can be reported to Console with `ConsoleNotification`.
- When a node transfers to itself in a high-availability setup, use the address of one node, not a name that resolves to either.

2.10.3 Remote execution

`RemoteExecution` runs a command over SSH on a remote system (Linux or Windows with an SSH server), or on Orchestrator itself.

- It is synchronous: a worker is busy for the whole duration, even if Orchestrator does nothing. A one-hour command holds a worker for one hour.

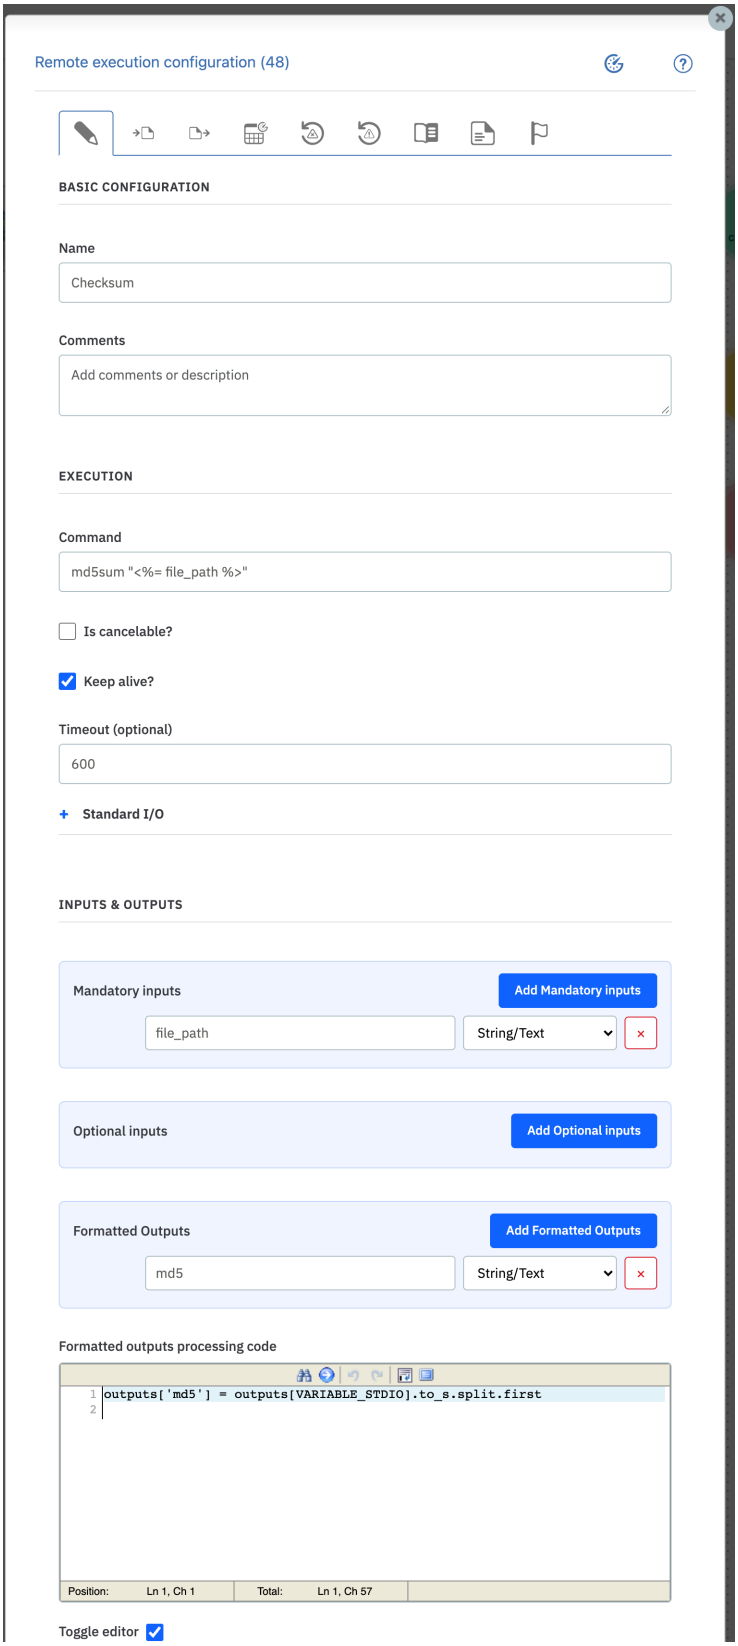

RemoteExecution: command with a placeholder, timeout, mandatory input, output parsed from the standard output

- `AsyncRemoteExecution` (Linux targets only) starts the command in the background, disconnects, and polls every few seconds: much more scalable. The script can be written in the step. In asynchronous mode the exit code is always 0: report errors in the output (for example a line `Error : 1 - text`) and parse it.
- Exit code 0 means success; any other code is an error.
- Set a timeout above the expected duration.
- The whole output is returned as text: parse it in the output processing, for example `outputs['id'] = JSON.parse(outputs[VARIABLE_STDIO])['id'] rescue ""`, and set `@status = STATUS_FAILED` with `@status_details` when needed. The script can also print lines that Orchestrator shows as progress (`-#Workflow running -#--progress 50#-`); add `2>&1` to capture errors.
- `{ :keepalive => true }` in the connection options helps when SSH disconnects.
- Arrays and JSON can be passed to a shell script through placeholders, with careful quoting.

2.10.4 Generating text and calling services

`FileGenerator` writes a text file (XML, JSON, text, not binary) from a template with placeholders, or returns the text as an output (return file content, no target path).

- Prefer it to Ruby code that builds JSON through hash manipulation: anyone reads and edits the payload, and the generated payload is visible in the work order (copy it, send it to the support of the third party: "this is what I'm sending"). Writing the body directly in `RestRequest` saves a step but hides the payload.
- In templates, end lines of Ruby tags with `%>\` and select Suppress marked linefeeds to avoid blank lines; do not indent the tags.
- Required inputs of `FileGenerator` accept empty values.
- Write `<%= variable %>`, not the `{{variable_name}}` syntax that the form mentions *(4.1.6)*: see Placeholders.
- Do not start input names with a capital letter, and do not name an input like a Ruby or Orchestrator method: for example an input `md5` calls the method `md5` of Orchestrator, and the step fails with "wrong number of arguments".

`RestRequest` sends one HTTP request (XML or JSON), optionally repeated at a polling frequency until the polling stop condition (Ruby) is true.

- To start a job and wait for it: two steps, a start request and a check request with polling.
- Extract values from the response in the output processing (additional outputs), rather than in a following `CustomRuby`: one step less, and the request step is self-contained when reused.
- Set `@status = STATUS_FAILED` and `@status_details` in the output processing when the response reports an error: an HTTP 200 can carry an error in the body.
- With Continue monitoring, `RestRequest` is a REST watcher: set a record id.
- File uploads (`curl -F`) are not supported: use `RemoteExecution` with `curl`.
- `CollectionManager` converts a JSON string into a hash and extracts elements (one level per step in 4.0).
- `XmlParsing` extracts values with XPath.

Other helpers:


- `ConvertPath`: converts paths between Windows and Linux, or between mount points (for example a transcoder that sees the storage under another path); accepts arrays; does not fail when the path does not match. Most transcoders run on Windows and expect Windows or UNC paths; Vantage, for example, expects folder paths that end with a backslash.
- `FileInfo`: base name, name without extension, folder, size, dates, existence, from a path (size and dates for local files only).
- `UuidGenerator`: unique identifiers.

2.11 Custom code


`CustomRuby` runs Ruby code in a step: inputs in `inputs['name']`, outputs in `outputs['name']`, declared with their types.

When to use it:


- when no plugin does what you need (often string or path manipulation, or complex rules);

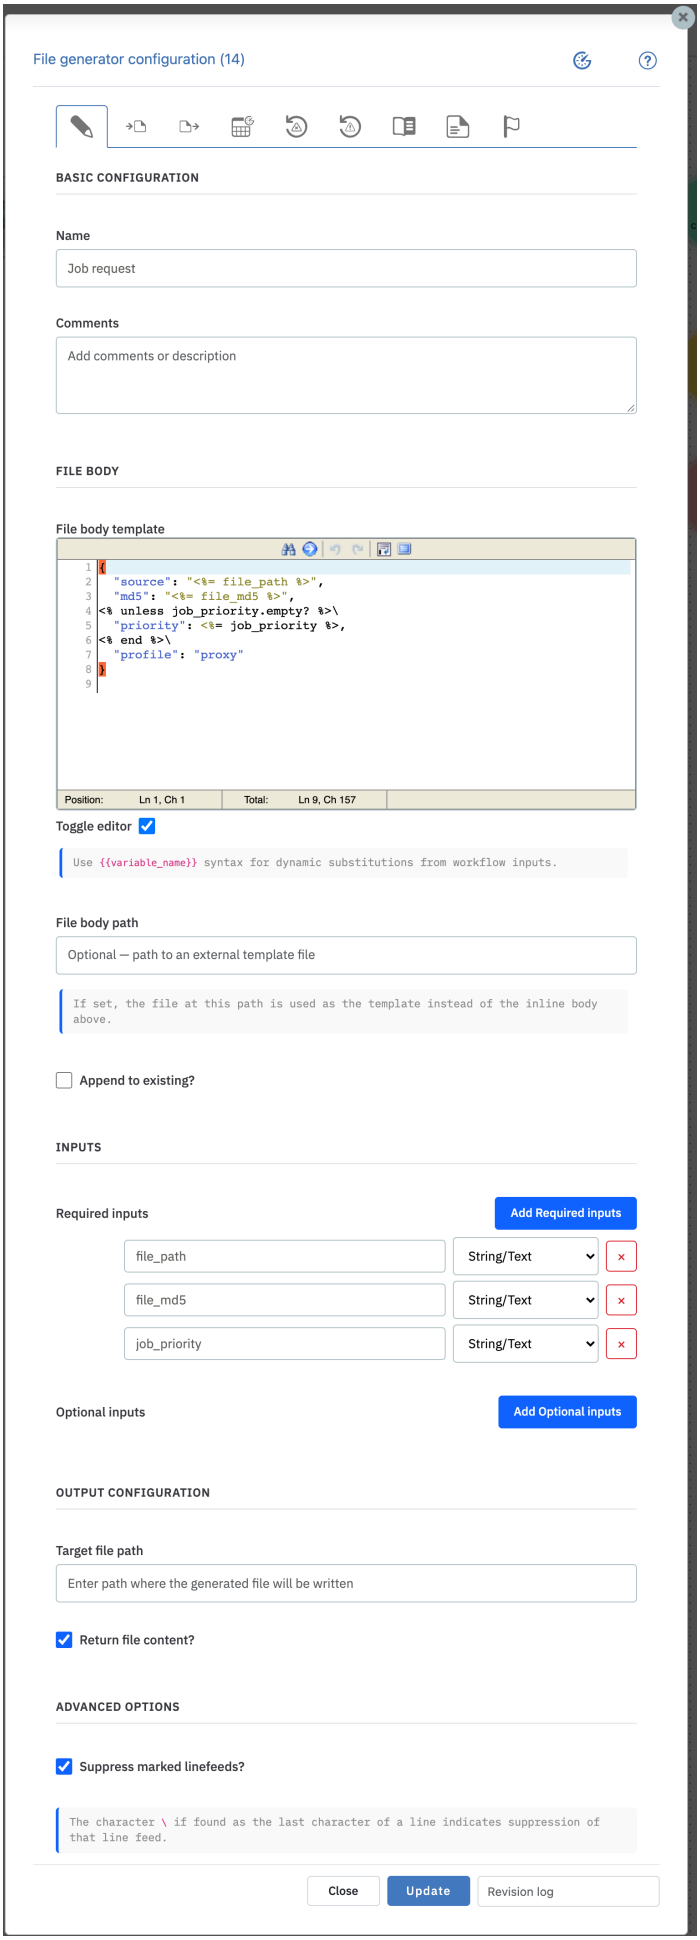

FileGenerator: a JSON template with a condition, linefeeds suppressed after the Ruby tags, content returned as output

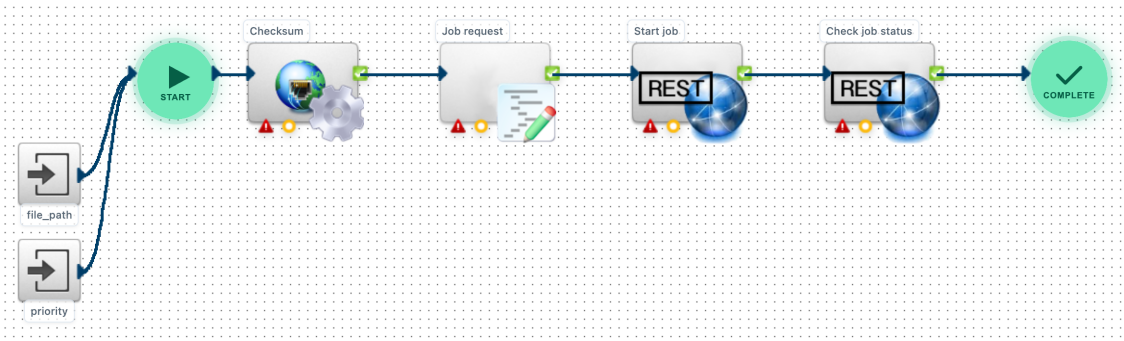

Build the request, start the job, then check the job status

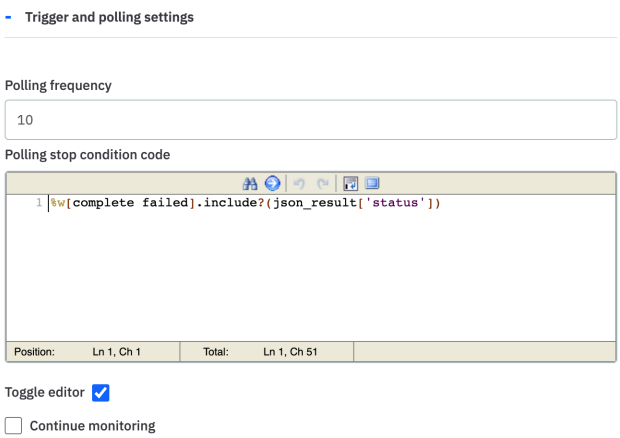

Check job status: polling every 10 seconds until the job is complete or failed

- when it replaces many steps (about 10, or a variable number of steps in a fan-out): fewer steps, smaller database, faster Orchestrator.


When not to:

- to merge two standard steps: standard steps are readable, and their bugs are fixed by Aspera support.
- for constants: use a configuration step.
- to parse JSON or build payloads: `CollectionManager`, `RestRequest` output processing, `FileGenerator`.


Workflows that put all their logic in Ruby steps are the hardest to support.

Rules:

- Comment the code: what it does, which outputs it produces.
- Use the full-screen editor.
- `CustomRuby` is synchronous: a `sleep` keeps a worker busy.
- `return STATUS_FAILED, "File #{inputs['file_path']} is not a .tar file", outputs` ends the step as failed with a message; use input variables, not placeholders, in the code. Without `outputs` as third value, the outputs set before are lost *(4.1.6)*.
- Add `rescue` to expressions that may fail: `outputs['serie'] = xml['Content'][0]['Series'][0]['SeriesTitle' rescue ''`.
- `Rails.logger.info "#{myhash.inspect}"` writes to `/opt/aspera/orchestrator/log/production.log`. There is no method `debug` in 4.1.6: calling it ends the step in error.
- Do not name a variable with a capital letter: `WorkOrder = WorkOrder.find(...)` replaces the class.
- A class defined in one step is not available in another step (different workers): define shared code in a capsule (Engine > Capsules > Import).
- Use forward slashes in paths, even for Windows paths; `File.windows_to_unix` converts.
- Ruby accepts single and double quotes: choose one style.
- `/opt/aspera/orchestrator/script/cmd.sh` opens a console to try code.
- Since 4.0, `CustomPython` runs Python.

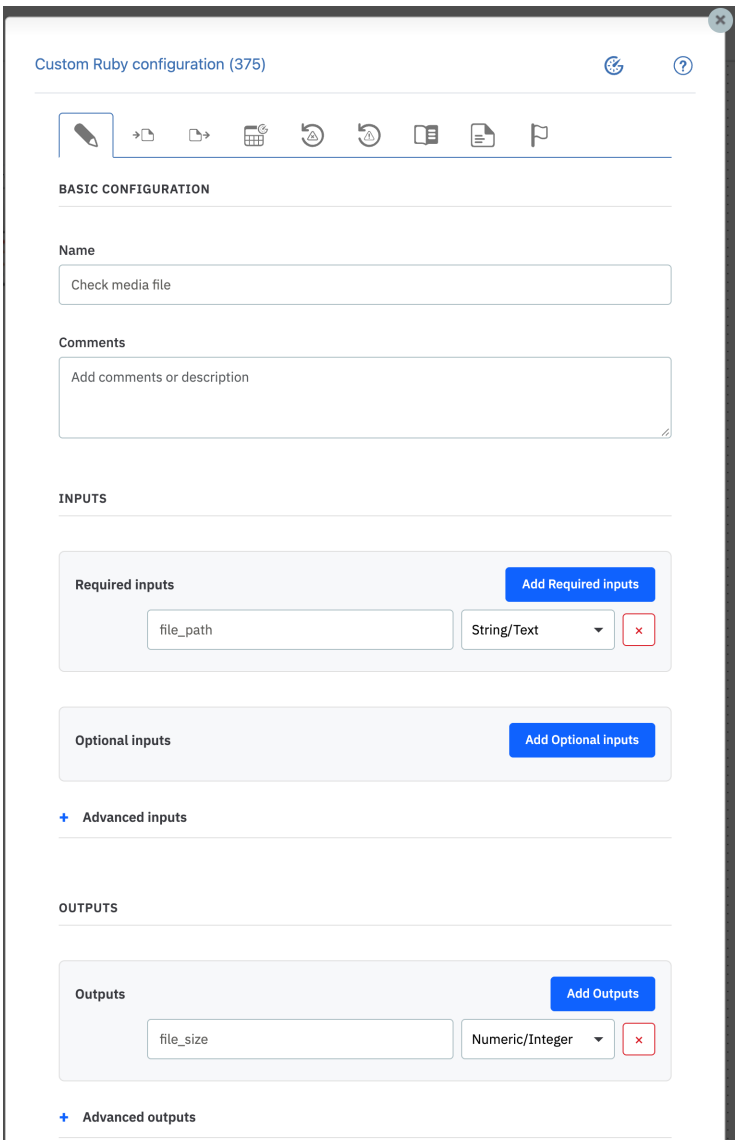

CustomRuby configuration: required inputs and outputs, with their types

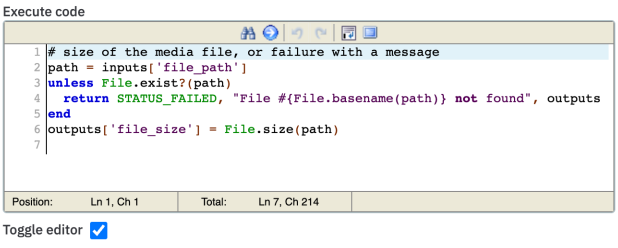

CustomRuby code: return a status with a message, or set an output

- `CustomTrigger` repeats Ruby code until it returns a final status. Avoid it except in rare cases: it is hard to manage.
- `CustomProgressNotifier` runs code when the status of an earlier step changes.

Processing code also exists on inputs (pre-processing), outputs (post-processing) and steps; see Processing code.

2.12 Resource management


Resource management limits how many times a part of a workflow runs in parallel: ”not more than 5 transcodings at a time”. It is the most complex part of Orchestrator, and the only one that requires real thinking; everything else is mechanical.

2.12.1 Resource concepts

- A resource is a ticket, not a machine: Orchestrator does not check, ping or monitor anything. Naming a resource after a server is only a convention of the workflow. Orchestrator guarantees that it sends no more than N jobs; jobs submitted to the server by other means are not counted.
- Resource control is also useful without any server: to protect Orchestrator from too many checksums in parallel, for example.
- Load balancing (`LoadBalancer`, or secondary addresses of a remote node) distributes requests (a, b, c, a, ...) without limit or lock. Enough for many quick operations.
- Mutual exclusion locks a capacity until it is released: `LoadManager` (current) or `ResourceManager` (legacy). For new workflows, use `LoadManager`; migrate old workflows when possible. `ResourceManager` is supported but gets no new features (queue tags, for example). Both use the same resource pools.
- A pool has resources, each with a capacity (number of slots); a request reserves a number of slots (1 by default).


2.12.2 Resource pools

Create the pool first, in Workflows > Resources, before designing the workflow. Do not create it ad hoc from the workflow step: a pool is not a workflow-level object. Create it as Custom to be able to change resource names and capacities later.

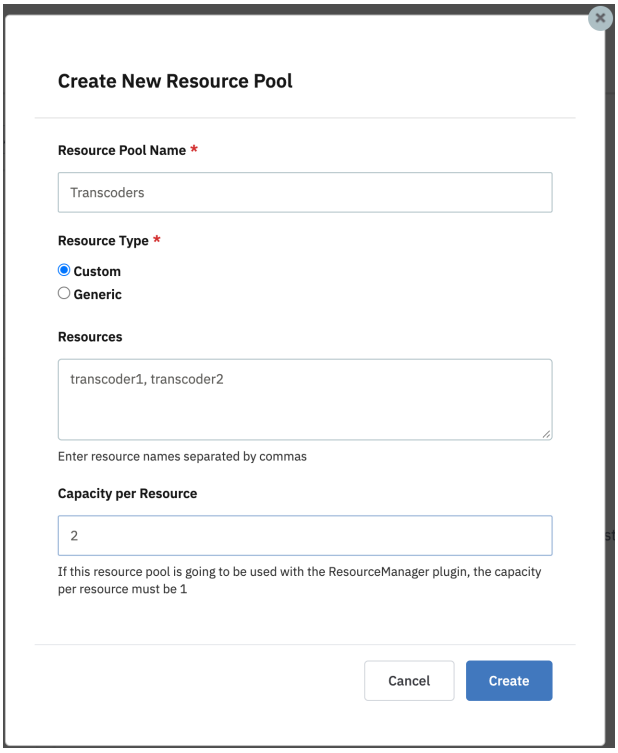

Create New Resource Pool: custom, two resources of capacity 2

The pool view shows the reservations and the work orders that hold them (by their allocation label), and allows releasing a slot by hand (menu of a resource: Release a capacity, Release all capacities), taking a resource offline, changing a capacity, or adding a resource; changes apply at once. A pool cannot be deleted while slots are reserved. The allocation history shows how busy the pool was: if it is always full, the resource is the bottleneck.

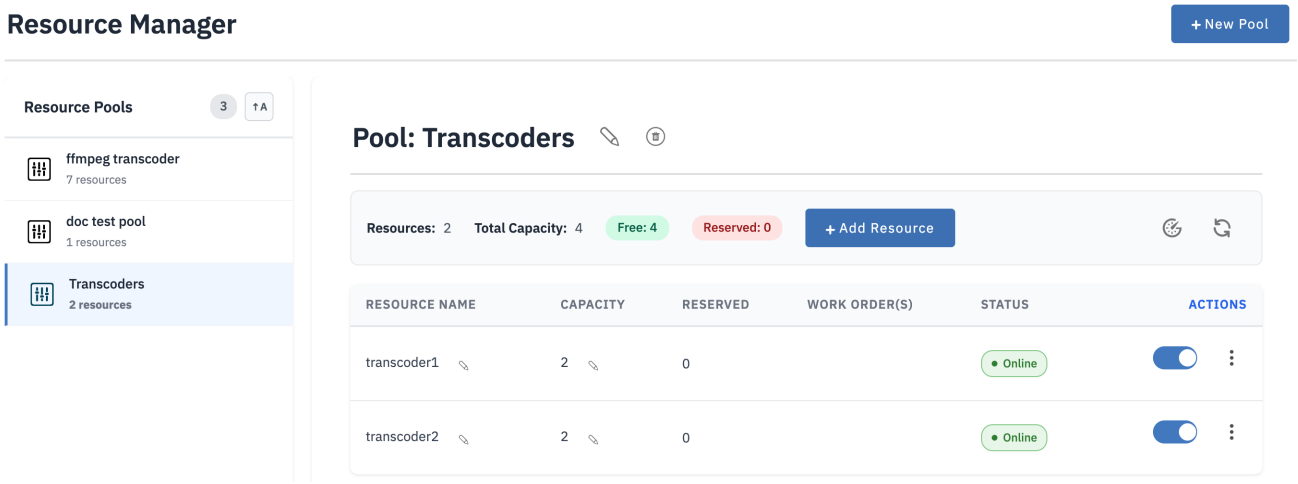


A pool of two resources of capacity 2, online

2.12.3 The pattern

Always the same layout:

1. `QueueStager` (add): puts the element in the queue (optional, see Queue).
2. `LoadManager` (reserve): waits for a slot.
3. One step, or one sub-workflow with all the work that needs the resource.
4. `LoadManager` (release) on success, then Complete.
5. On failure or error of step 3: OR, `LoadManager` (release), then Failed.

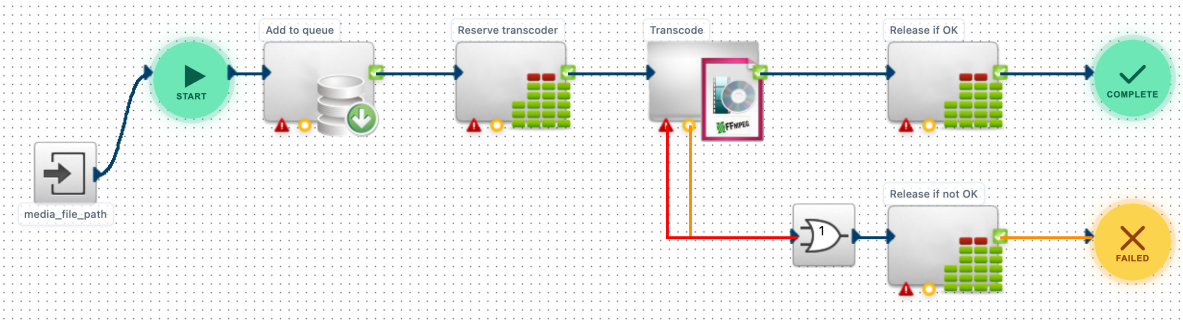


Add to queue, reserve, transcode, release if OK; failure and error of the transcoding go through an OR to ”Release if not OK”


- Every path after the reservation must release, or the slot is never freed: starvation. New work orders wait forever (”No resource to allocate”), and a manual release only delays the next starvation. With several steps between reserve and release, every failed and error exit must reach a release: unreadable and fragile. With one sub-workflow, the pattern stays the same whatever the sub-workflow does.
- Map the allocation token output of the reserve step to Allocation token to release of both release steps, carried through the middle step. Also select the pool in the release steps, for readers.
- Create templates for reserve and release when a pool is used in several workflows.
- Set an Allocation label with the element (for example `Transcoding <%= File.basename(file_path) %>`): the pool view then shows what holds each slot.
- The Allocation policy chooses among the resources that have enough free slots: Fair Distribution takes one at random, Sequential Distribution takes them in turn (round robin). Neither fills the first resource before using the next one. To use a second server only when the first one is busy (for example the first server has a perpetual license and the second is paid per use), put each in its own pool, and reserve from the second pool after a wait timeout on the first one (Timeouts and capacity).

The legacy layout with `ResourceManager` is the same:


2.12.4 Timeouts and capacity

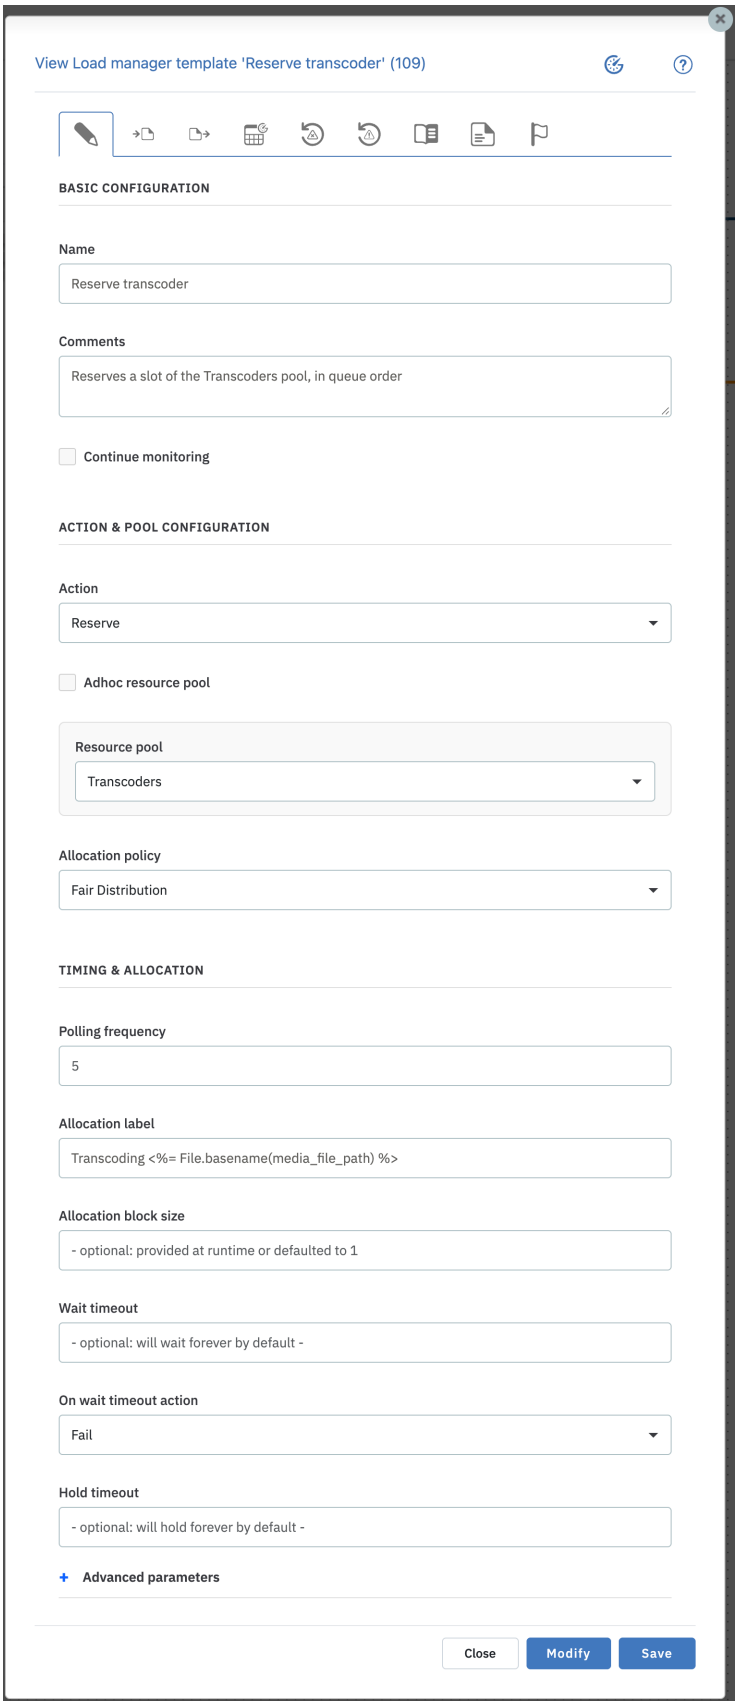

LoadManager configuration (template Reserve transcoder): action, pool, allocation policy, label, block size, wait timeout, hold timeout

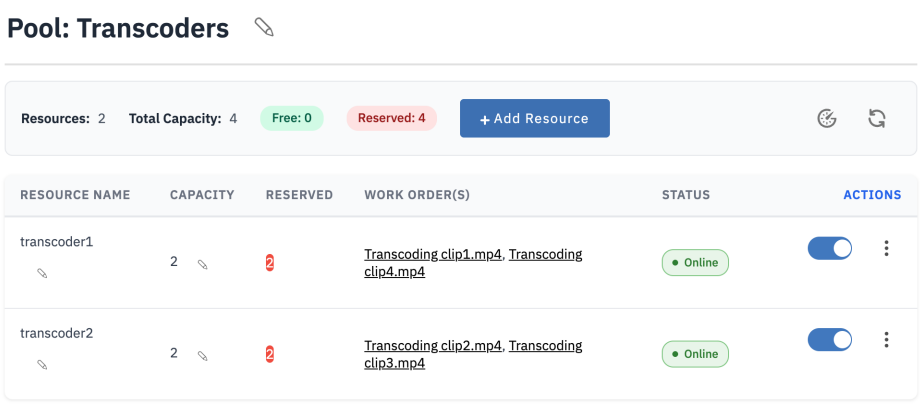

The pool is full: each slot is held by a work order, shown by its allocation label

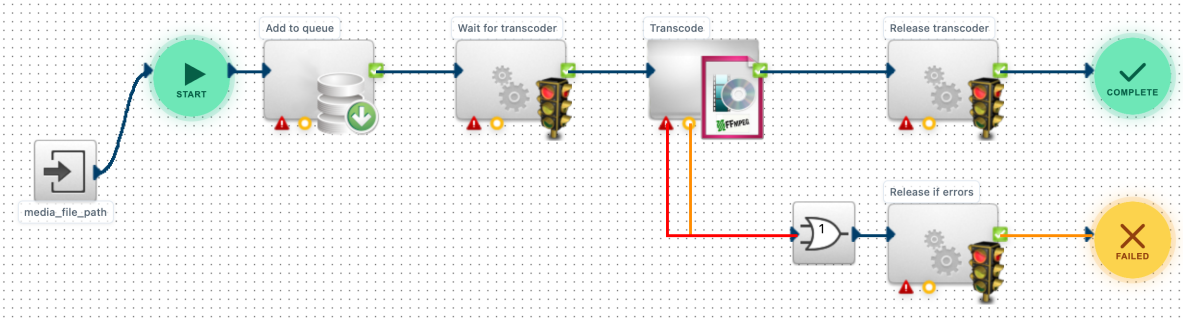


Legacy layout with ResourceManager: add to queue, wait for transcoder, transcode, release


Setting	Meaning	Use
Wait timeout	Maximum wait for a slot; then the step passes (more parallel work than the capacity) or fails (On wait timeout action).	Service level: after 50 minutes without a local transcoder, use an expensive cloud transcoder.
Hold timeout	The slot returns to the pool after this time, even if not released. The work goes on.	Protection against forgotten releases (cancelled or destroyed work orders). Set it above the longest possible hold (for example twice that time), or more work runs in parallel than allowed.
Allocation block size	Number of slots to reserve.	Big files reserve 2 slots, small files 1.
Use weight for allocation	The weight of the queued element is the number of slots.	Same, set when queuing.

- If the element at the top of the queue needs more slots than any resource has free, nothing proceeds until enough slots are free: the queue does not skip to a smaller element.
- Most workflows need neither wait nor hold timeout.


Handling a server failure: when the work on a resource ends in error, the server is probably down. Releasing the resource sends the next elements to the same server, and they all fail. Not releasing it limits the failures, but if all servers fail (for example the automatic update of all Windows servers at 3 a.m.), all slots stay taken. A compromise: on error, notify IT ("resource paused for 30 minutes") and do not release, with a hold timeout of 30 minutes; the slot comes back by itself and is tried again. Do it only when needed: simpler workflows are easier for operators to understand.

Fallback to another resource when one fails:

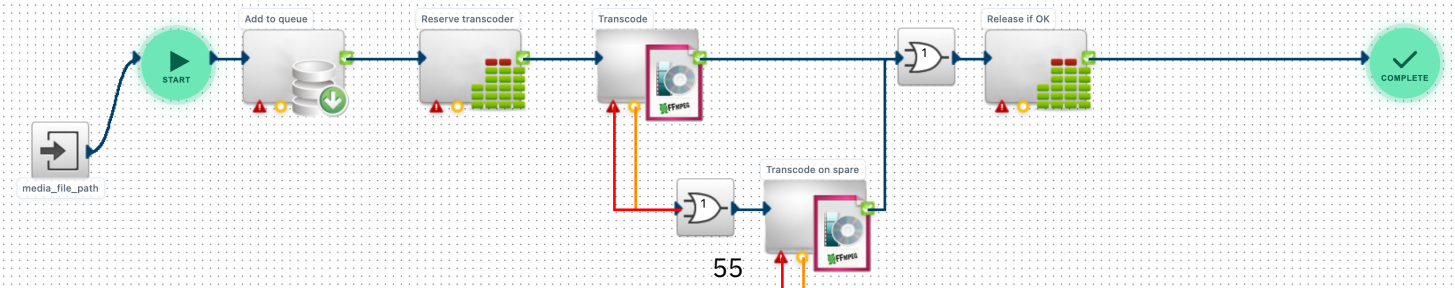

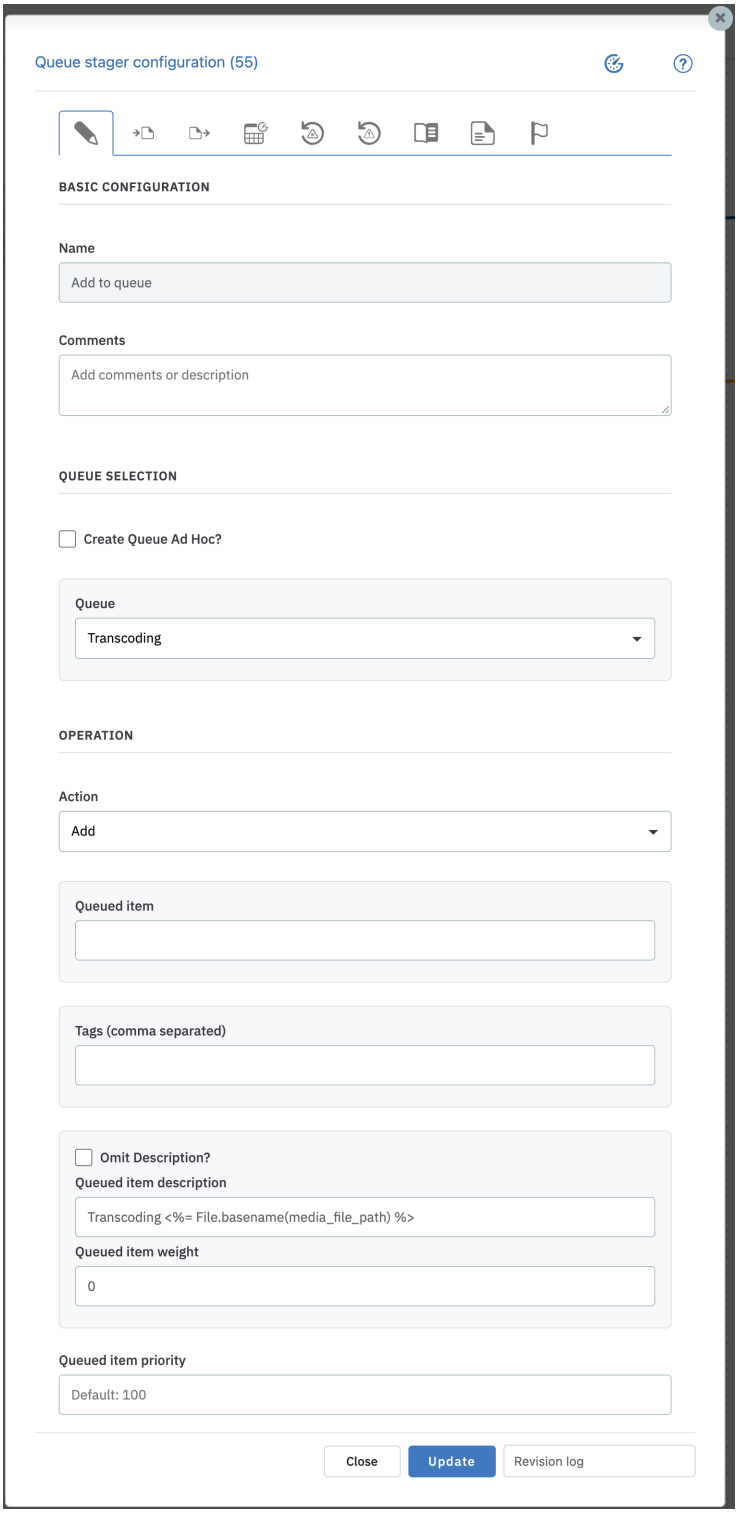


QueueStager configuration: queue, action Add, queued item description with the file name

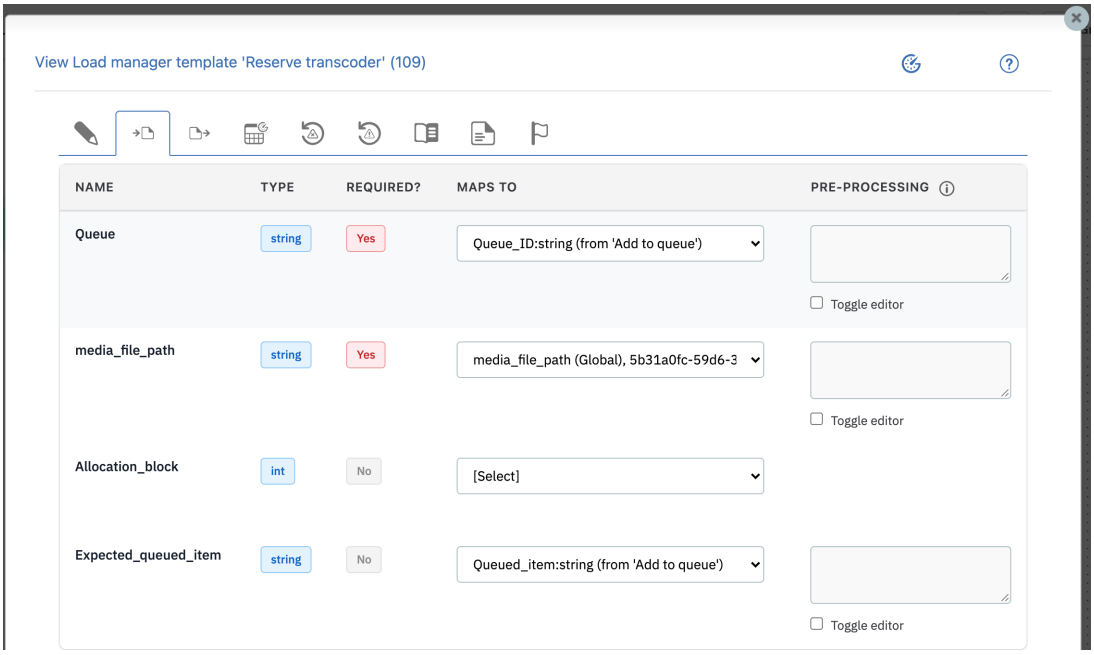


Load manager inputs: Queue and Expected_queued_item mapped to the outputs of ”Add to queue”

- Set Auto-purge: On work order stop on the queue. Otherwise, when someone cancels or destroys a work order, its element stays at the top of the queue, and all other work orders wait forever, even with free slots: a very common case. A workflow can also remove the element explicitly (`QueueStager` with action remove), for example after a wait timeout.

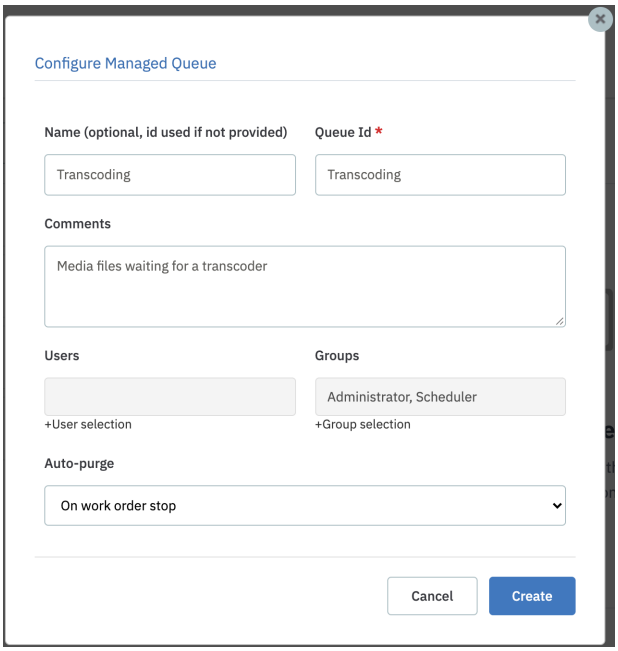

Configure Managed Queue: Auto-purge On work order stop

- Priority: 0 is the highest (like process priorities); for example a priority per source folder. There is no preemption: priority orders the queue, it does not stop running work.
- Weight: an estimate of the work of an element (size, duration); it does not change the order. The total weight ahead of a priority (action `list_all`) tells whether a deadline can be met, for example to send an urgent file another way.
- Tags (4.0 and later, `LoadManager` only): a tag set on a queued item and on a resource makes the load manager take the first item that matches the tag of a free resource, even if it is not at the top of the queue.
- Operators with the Scheduler group and membership of the queue can reorder, remove and pause elements from the Queues view or a dashboard.
- In the Queues view, Delete deletes the queue definition; Clear removes its elements.

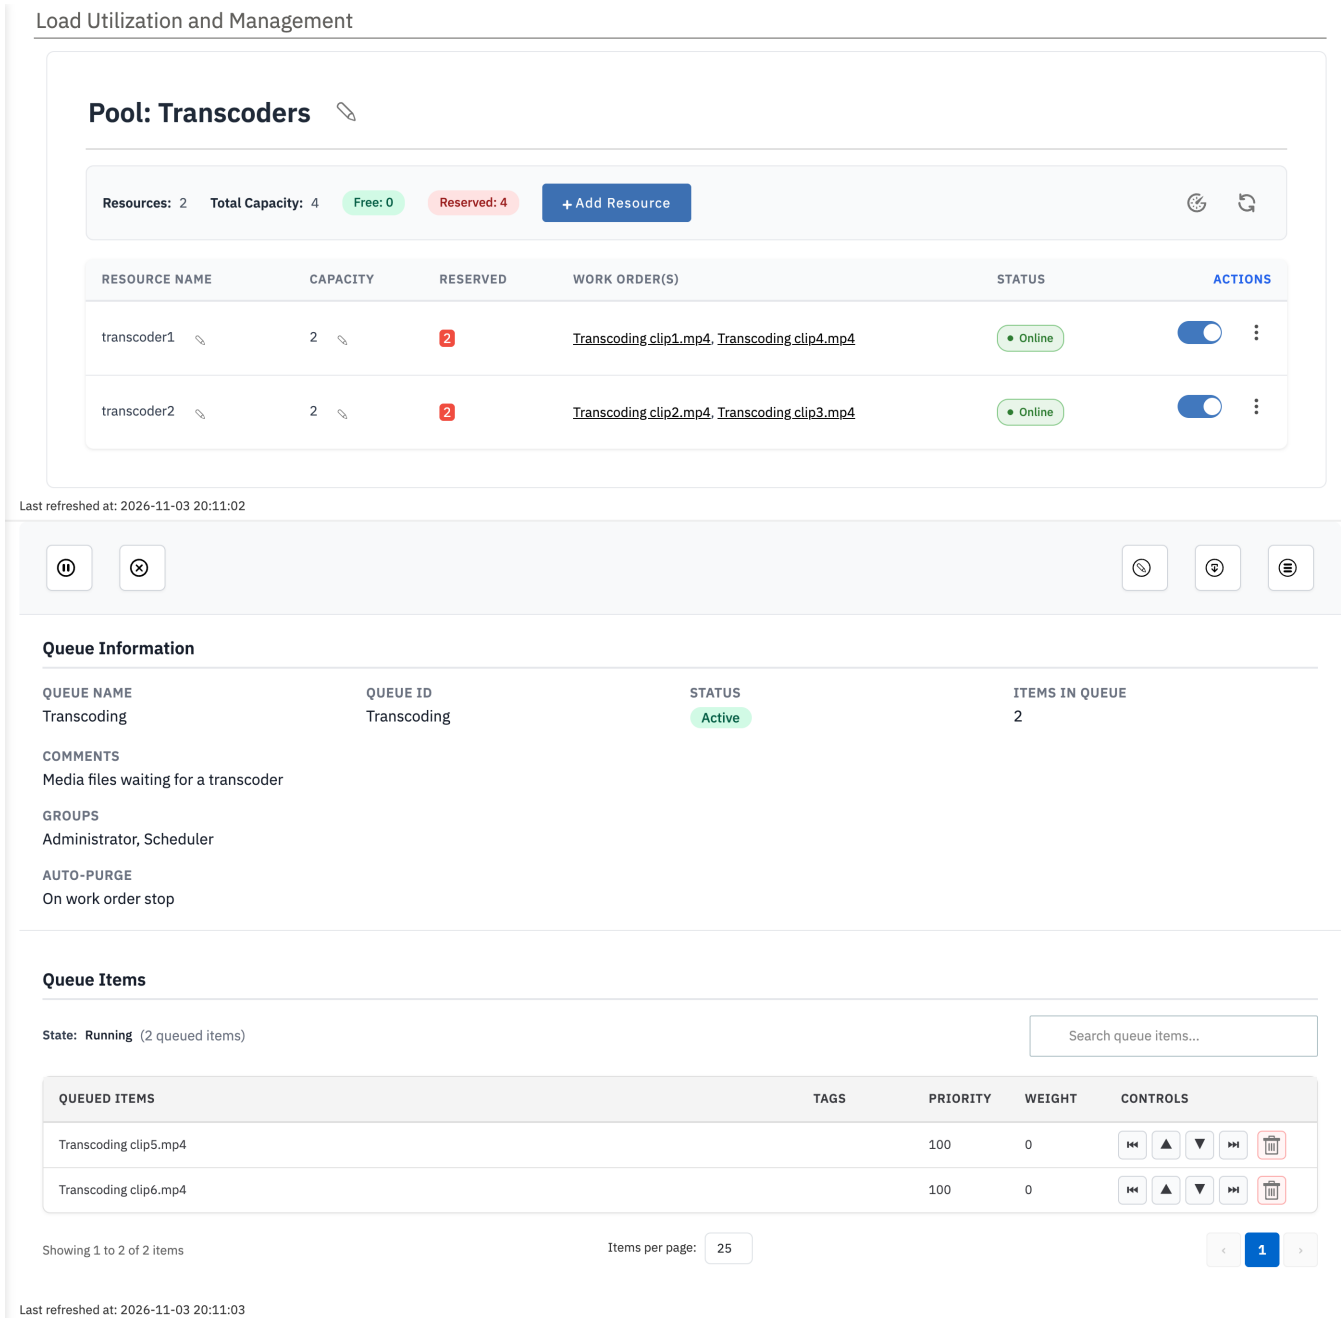

A dashboard page: the pool is full (Managed Load Utilization Monitor), the next files wait in the queue with priority, weight and controls (Queue Manager)

2.12.6 Operating with queues and pools


- Pause the queue to stop the work after the queue (maintenance of the transfer or transcoding servers): everything before the queue goes on (watchers, preparation), elements accumulate, and resuming processes them in order. This alone is worth adding a queue.
- Take one resource offline (or lower its capacity) to work on one server.
- Add a resource to a pool at any time: it is used at once.
- After destroying work orders by hand, release their slots and remove their queue elements, or set a hold timeout and auto-purge.

2.12.7 High volume


With the pattern above, each element in the queue is a running work order that waits. A thousand is manageable; 10 000 or a million overload Orchestrator (for example when a whole storage is migrated to the cloud).

Split into two workflows:

- Workflow 1 detects the elements, adds them to the queue, and ends.
- Workflow 2 starts with a `LoadManager` with Continue monitoring, bound to the queue without expected queued item: each time a slot is free, it takes the element at the top and starts a work order.



Workflow 1: watcher, add to queue, end

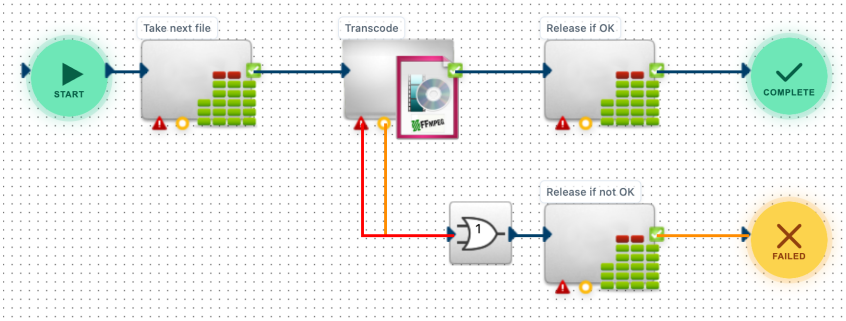

Workflow 2: load manager with Continue monitoring, processing, release

- The number of running work orders follows the number of slots (5 slots: at most 6 work orders), not the number of elements.
- No expected queued item, and no auto-purge: the element is not tied to the work order that queued it.
- The load manager polls the queue (every 5 seconds by default): with very short processing, the pool may look idle while the queue is full.
- Try it on a test workflow first: do not put it in production without understanding it.

2.13 Human interaction

2.13.1 User input


`UserInput` stops the work order and creates a task for users or groups: data to display (mandatory inputs) and data to request (outputs).

- Add at least one user or group; otherwise the step does not wait and its outputs are empty. Users see tasks in the Tasks tab (Contributor group) and in dashboards.
- Restrict a task to one user by setting only a user. With a group, the first user who submits wins; for exclusive work, use two tasks: one to take the task (visible to the group), one to fill it (visible to the user who took it, an output of the first task).
- Assign users or groups at run time with `SingleUserAssignment`, `UserAssignmentsArray`, `SingleRoleAssignment`, `RoleAssignmentsArray`.
- The event description (task title) can use the displayed inputs (`<%= %>`).
- Do not leave tasks open for long: each open task is a waiting work order. Set a timeout.
- A task can be completed through the REST API.
- For another layout, a custom form replaces the default content of the task form: see Custom form.


See the recipe operator decision and its custom form, with a sample, in the Workflow authoring chapter.

2.13.2 Direct start

A workflow with runtime parameters can have a custom start page: `/opt/aspera/var/config/orchestrator/workflow_start_views/_start_<WORKFLOW_ID>.html.erb`, with fields `external_parameters[<NAME>]` (`draw_input_string("external_parameters", "<NAME>")`, or a list built on the server, for example the files of

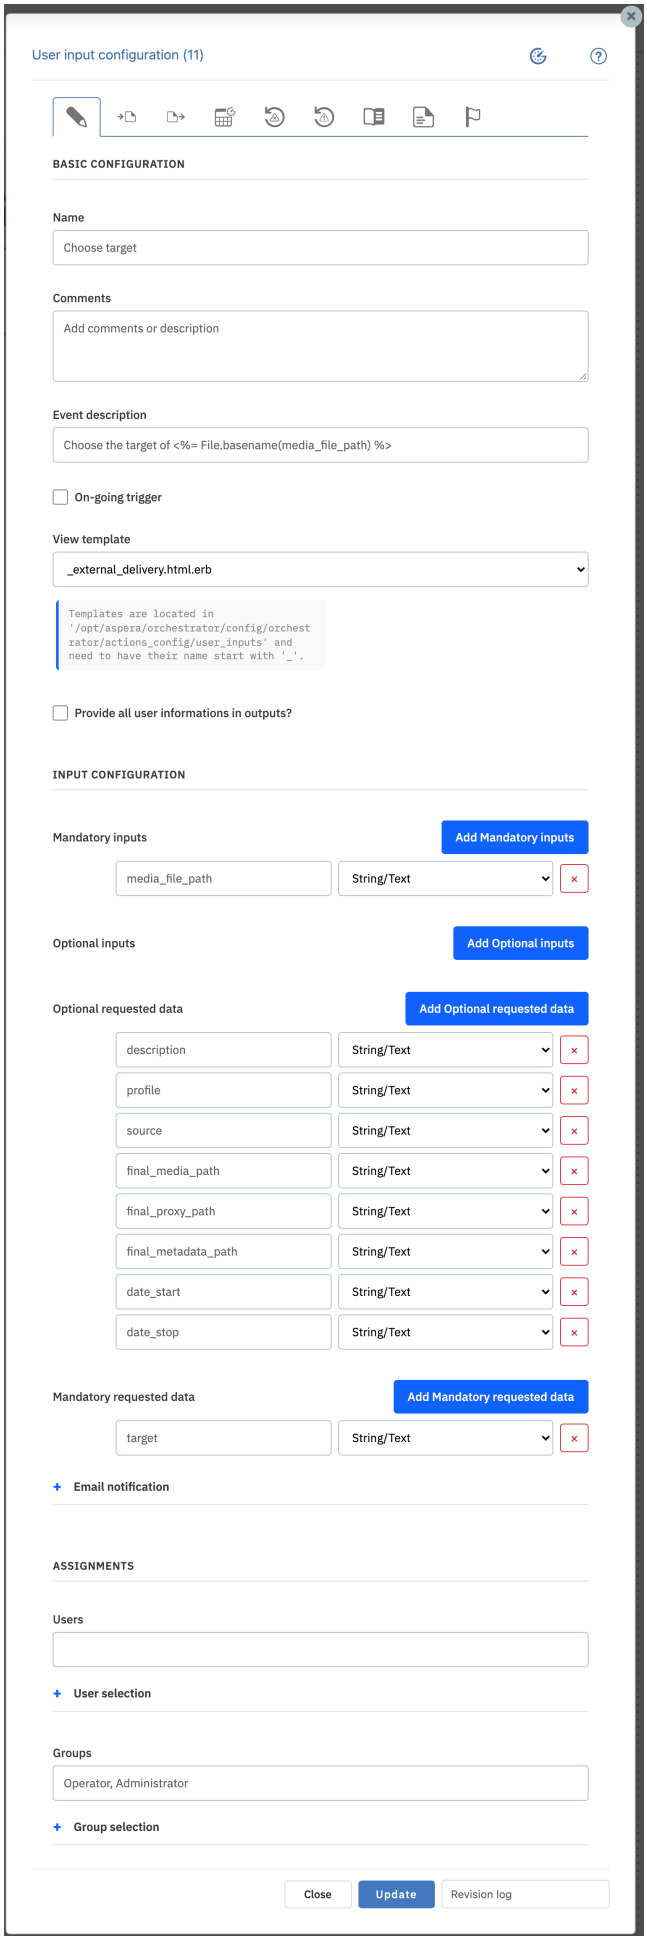


UserInput configuration: event description with a placeholder, view template, mandatory inputs, requested data, groups

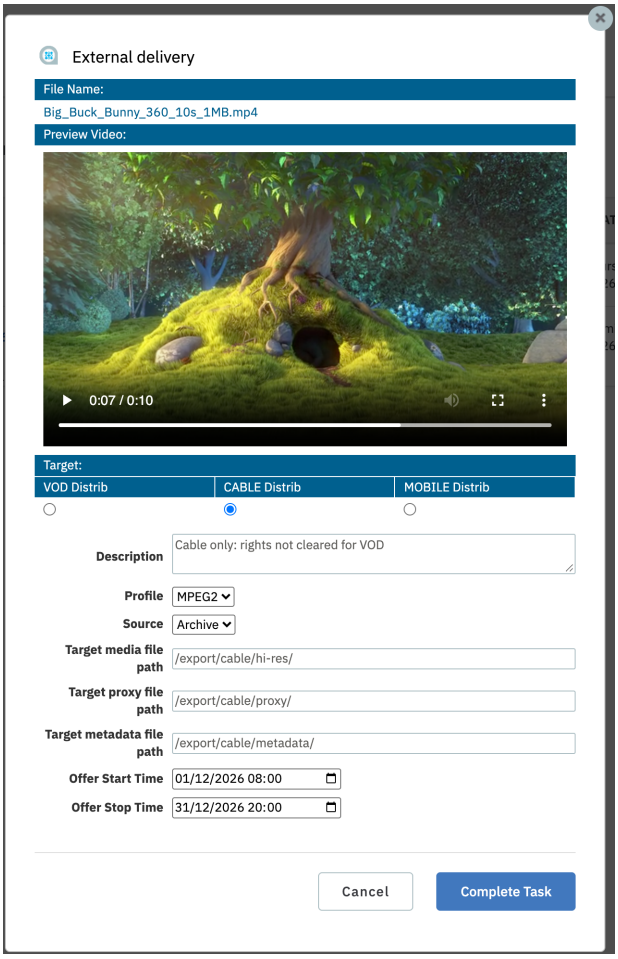

A custom form: logo, file name from the inputs, video preview; target, description, profile, source, paths and offer times requested (video: Big Buck Bunny, © Blender Foundation, CC BY 3.0)

a folder with `Dir.glob`), and an optional JavaScript function `validate_workflow_<WORKFLOW_ID>()` that is called before the start (return `false` to stay on the page). The page shows these fields after the standard ones (description, comments, execution priority).

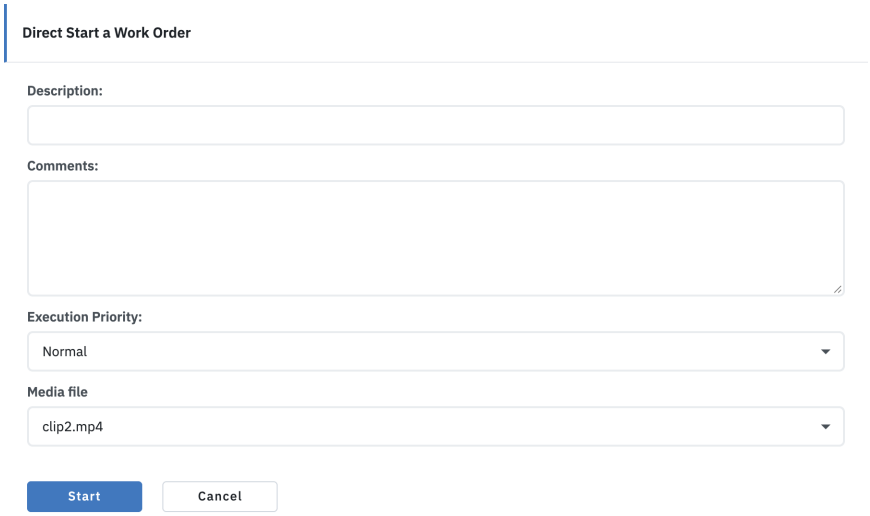

A custom start page: the media files of a folder in a list

- The page is opened at `https://<ORCHESTRATOR_HOST>/aspera/orchestrator/work_orders/direct_start/<WORKFLOW_ID>`, from the work order creation, from a dashboard, or from a link in a custom portlet.
- It starts the work order and does not report its result. For a page that starts and follows work orders (a "fast track" page for editors, for example), write a portlet that calls the API (Portlet development chapter).
- Do not put credentials in a link to this page (`login=`, `password=`): URLs are logged (see Where a secret is displayed), and the page does not read them (see REST API).


2.14 Monitoring and operations

2.14.1 Journals


Journals are a log of workflow activity for operators, in their language, grouped by file and package: the first level of troubleshooting, before the work order view. They are essential when the processing of one file spans several work orders (launchers, queues).

- Journaling must be on: Journal On in Engine > Configuration (Journal & Cleanup). Otherwise the journal steps end in error and the Journals view is not in the menu.
- Create journal books in Workflows > Journals before running the workflow: a journal step does not create its book (the entries are written without a book), and an import creates only the books of inline journals.
- Map the file to `<%= File.basename(file_path) %>` and the file path to `<%= file_path %>`.
- A package name groups entries; it is created when it does not exist. Here, the package is the folder of the file: `<%= File.basename(File.dirname(file_path)) %>`.
- Journal milestone is the progress of the file, in percent: 10 when received, 100 at the end.
- The journal status (in progress, complete, failed) is independent from the step status: write a final entry on success and on failure.
- Map the outputs `journal_file_ID` and `actual_package_ID` of the first entry to the inputs `file_ID` and `package_ID` of the later ones: they append to the same file entry. New file creates a new entry for the same file (each work order gets its own).
- Do not mix inline journals (step menu Journal) and journal steps.
- Packages whose files have all ended (complete, failed or error) are deleted after 7 days by default (Journal Kept Duration, `journal_kept_duration`); files still in progress are kept. Delete Journal with Work Order (`delete_journal_with_workorder`) deletes the entries with their work order.

Alternatives: logs collected by an external tool, a custom database table shown in a dashboard, metrics in InfluxDB with Grafana. Do not use the Orchestrator database for heavy external monitoring.

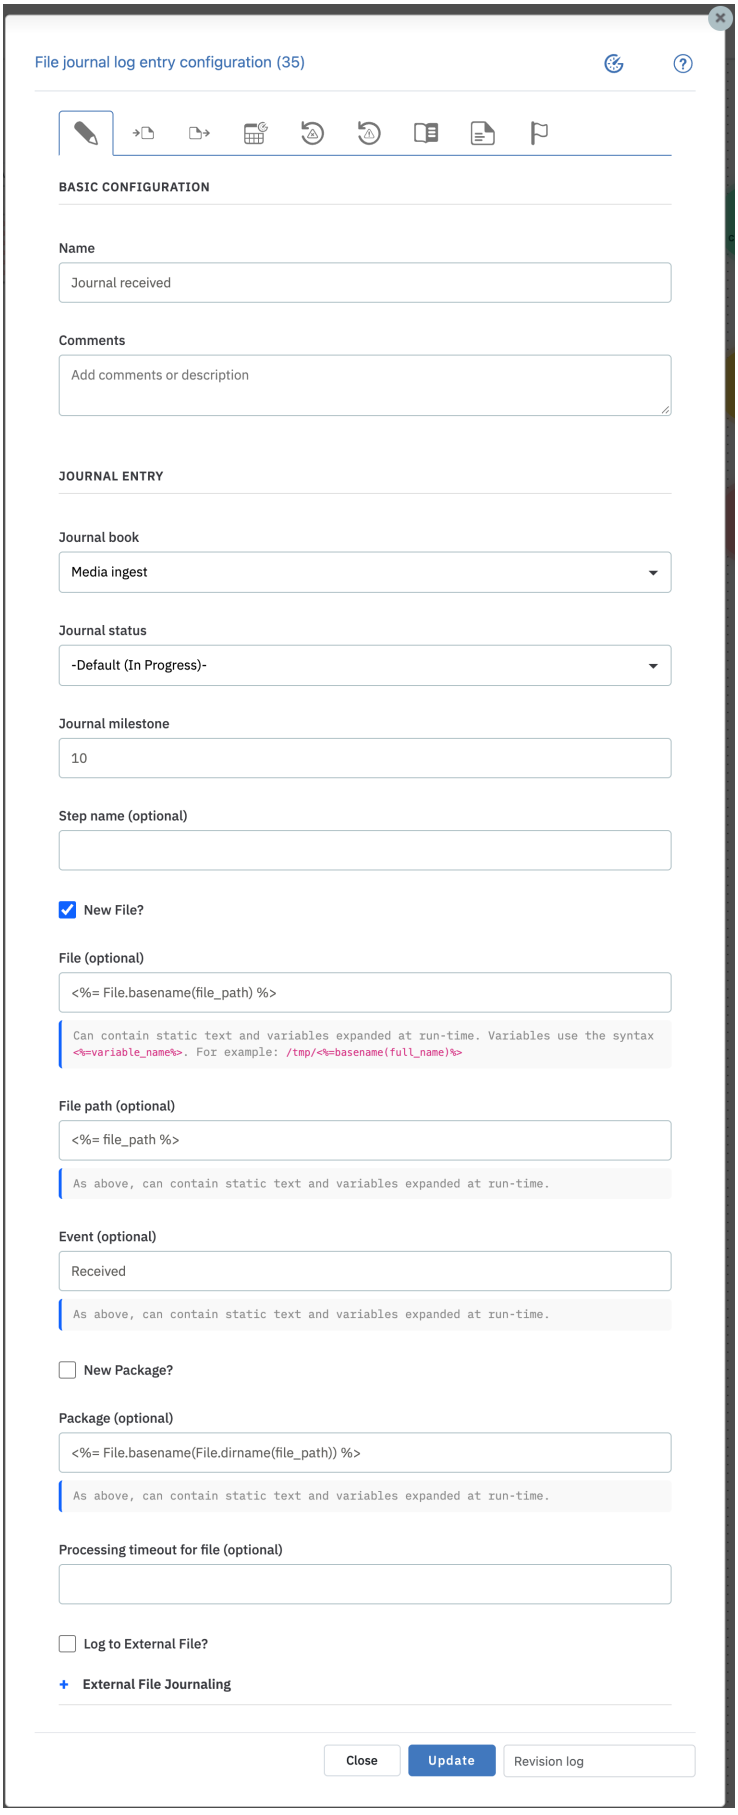

FileJournalLogEntry configuration (Pattern - journals and alerts, first entry of the file): journal book, status, milestone, new file, file, file path, event, package

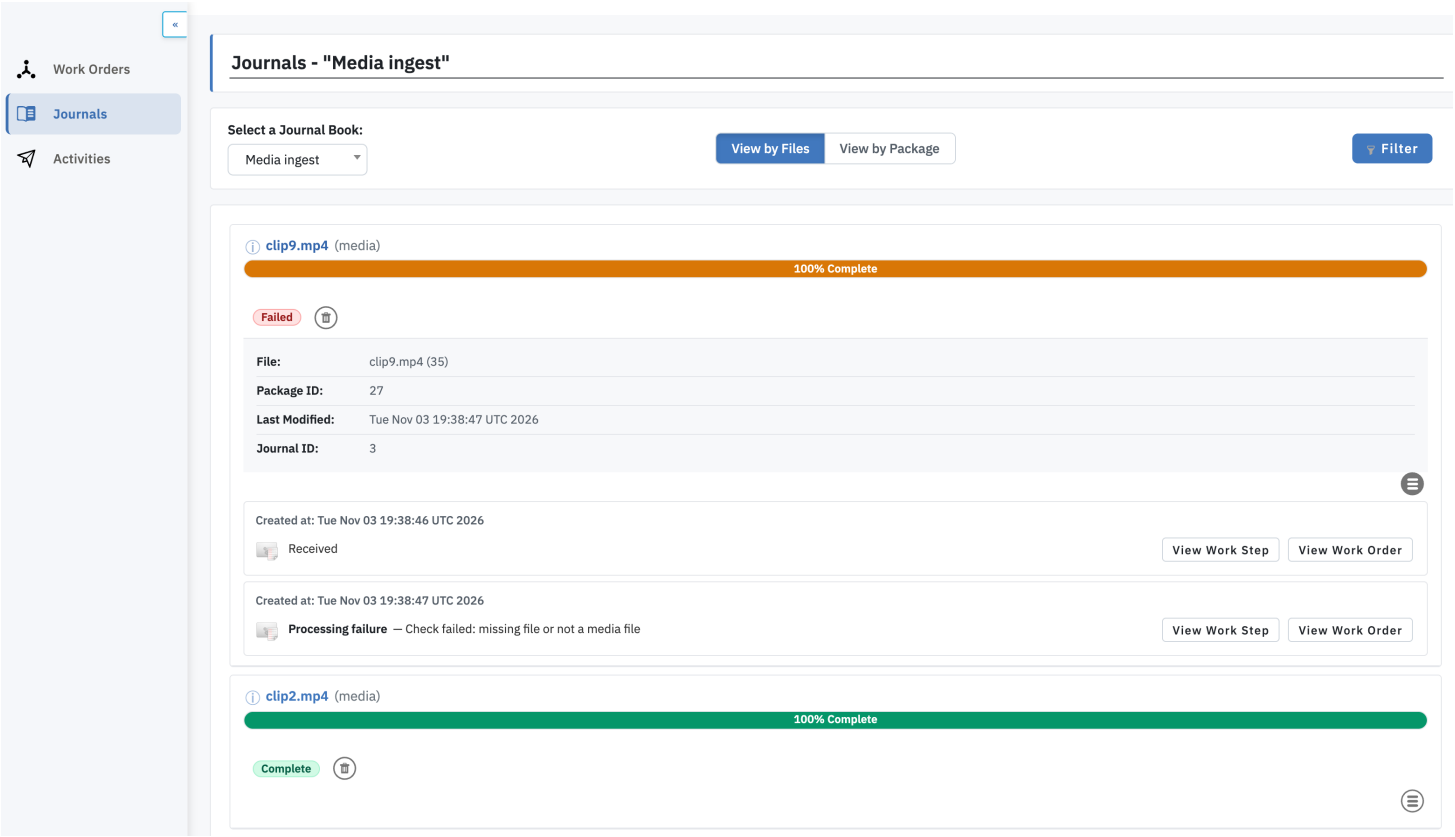

Work Orders > Journals, view by files: the failed file opened, with its two entries; View by Package counts the files of each package by status

2.14.2 Alerts


`OrchestratorAlertEntry` adds an alert in the Alerts tab under the bell icon of the user interface, for the users subscribed to its category (a new user is subscribed to all).

- Put everything in the alert message, which can contain placeholders: 4.1.6 does not save the Header.
- Raise an alert for what needs an action of an operator, not for each failure. Alerts are shared: deleting one, or Delete all, in the bell menu removes them for every user.


2.14.3 Monitors

Monitor	Checks	Action
Workflow	Whether a work order of the workflow runs.	Auto-start the workflow, with given runtime parameters; call a notification workflow.
Work order	Work orders of a workflow that complete, fail, end in error or are canceled.	Call a workflow for each (for example to send an e-mail).
Folder	Age and number of files (local, mounted, or on a remote node).	Call a workflow (for example to delete old files). Does not detect a missing folder.
Script	A command run on a remote node, which prints `<code> <MESSAGE>`: 0 OK, 2 warning, another code an alert.	Disk, CPU, memory, processes, also on remote servers.
Remote node	Reachability.	

- Add a workflow monitor to each trigger workflow: watchers are supposed to run forever.
- Set the Work Order Name of the auto-start: the monitor then checks and starts only the work orders of that name, so that several monitors can watch the instances of one workflow started with different runtime parameters.
- The runtime parameters of the workflow are listed under the work order name: without a value for a required one, the auto-start is skipped.
- A paused work order is not restarted (the monitor shows a warning).
- Suppress duplicate events avoids a notification at each check.
- Turning a monitor off does not stop the work orders it started.
- A notification workflow receives `NotificationType` (`WARNING` or `ALERT`), `NotificationMessage`, `MonitorType`

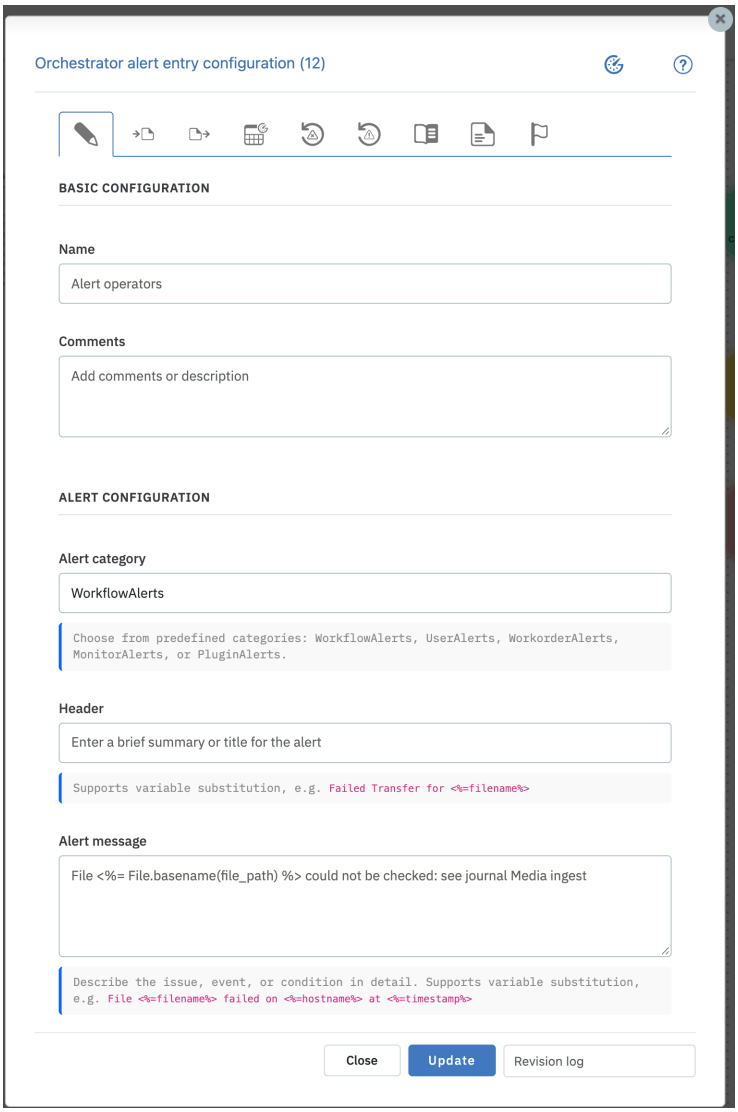

OrchestratorAlertEntry configuration (Pattern - journals and alerts): category, alert message with a placeholder

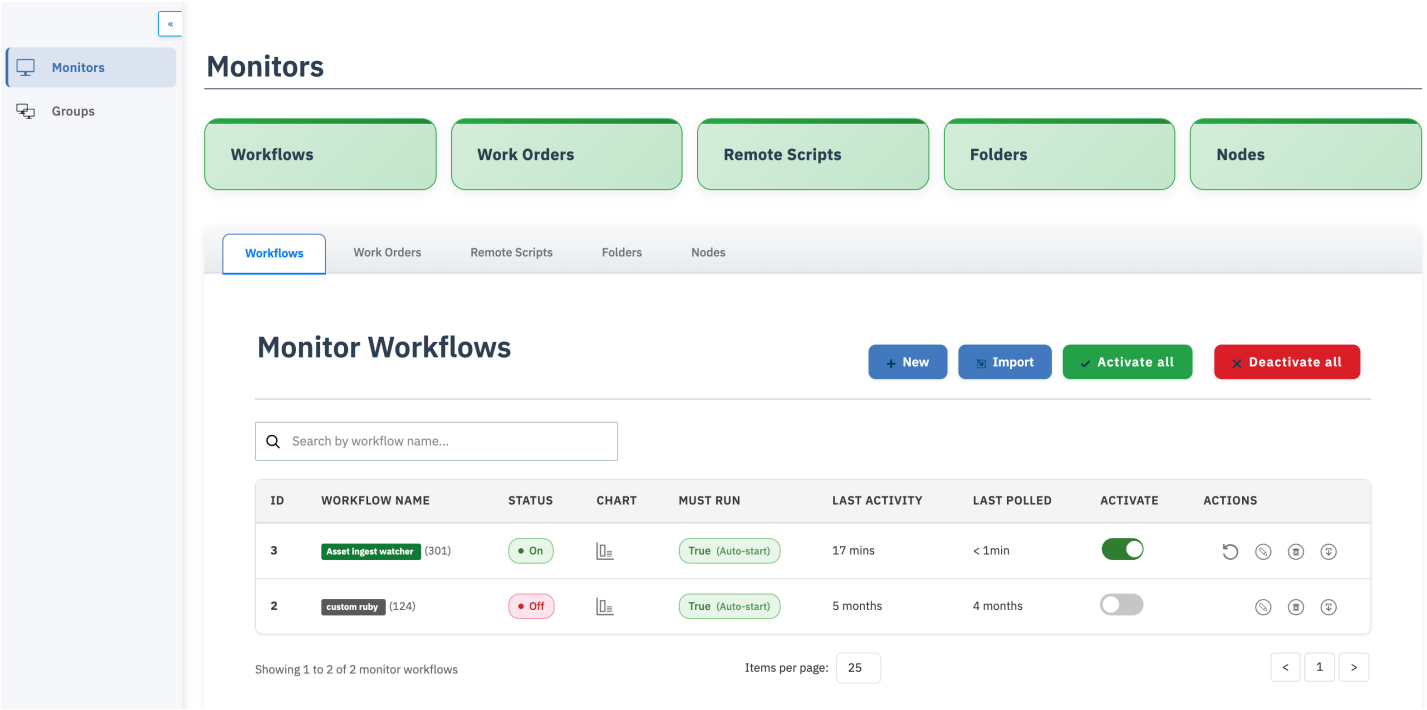

Monitors: a tile per type of monitor, then a tab per type; the workflow monitor of Asset ingest is on, with auto-start

- Steps of a work order are not always shown in chronological order; inactive steps have not run (and may never run).
- A work order that stays Initializing probably needs its workflow to be republished; one that stays Created is probably throttled (workflow throttle setting) behind other work orders of the same workflow.


2.14.6 Workers and capacity

Steps run in workers. A synchronous worker runs one step until it ends: file operations, script execution, `Md5Checksum` (computed on Orchestrator), `MediaInfo`, FTP transfers, `CustomRuby`. An asynchronous worker starts a job and polls its status, serving many steps: triggers, `FaspTransfer`, transcoder jobs.

- Prefer asynchronous plugins (for example `AsyncRemoteExecution`).
- Limit the number of synchronous steps that run in parallel with resource pools or the workflow throttle: when all synchronous workers are busy, the other steps wait.
- More workers allow more parallel work; each takes 200 to 500 MB of memory. Size them for the CPU and memory of the server.
- The engine decides what runs next; if it stops, the workers stay idle.
- The workflow and engine settings purge after (workflow) and `purge_cutoff`, `cleanup_cutoff` (engine) delete old work orders; keep them short on busy servers. Flagged work orders are never purged.
- Install the third-party tools used by workflows (for example `mediainfo`) on all Orchestrator servers of a cluster.

2.14.7 Users and permissions

- The groups give access to the tabs: Developer (Workflows), Operator (Work Orders, Monitors), Contributor (Tasks), Scheduler (Queues), System (Engine). Only administrators destroy and reset work orders by default.
- To start and follow a workflow, a user needs the run and view permissions on the workflow and on its sub-workflows.
- A non-administrator does not get the run permission on the workflows they create: add it.
- A developer who also runs workflows needs the Developer and Operator groups.
- Queues, user input tasks and dashboard pages have their own user and group permissions.
- `WorkflowLauncher` can run the launched work order as a given user, who then sees it without permissions on the workflow.

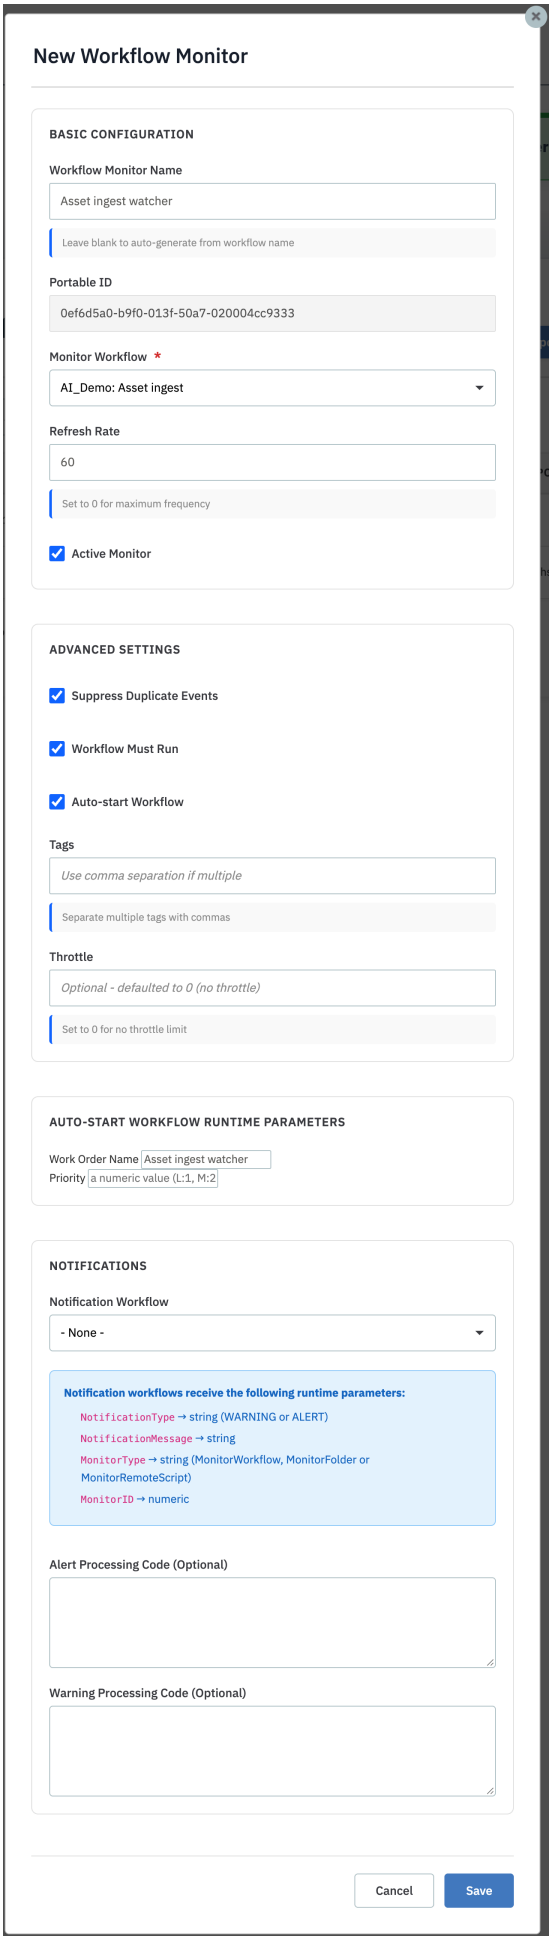

Workflow monitor of the trigger workflow Asset ingest: must run, auto-start with a work order name, notification workflow, corrective code


2.15 Integration API

An external application can start and follow work orders through the REST API: no watcher needed, which saves polling.

- Encode special characters in URLs.
- Pass credentials in the `Authorization` header, never in the URL, even when query parameters `login` and `password` are accepted: URLs are logged (see Where a secret is displayed). For a parameter that holds a secret, see Using secrets.
- `ascli` wraps the API, which saves writing the calls: see ascli commands.
- With several Orchestrator servers, call them through one address (load balancer or DNS).

2.15.1 Using inline validation

An Aspera transfer server can call a workflow for each file it receives, and reject the file with a message shown to the user: see Inline validation.

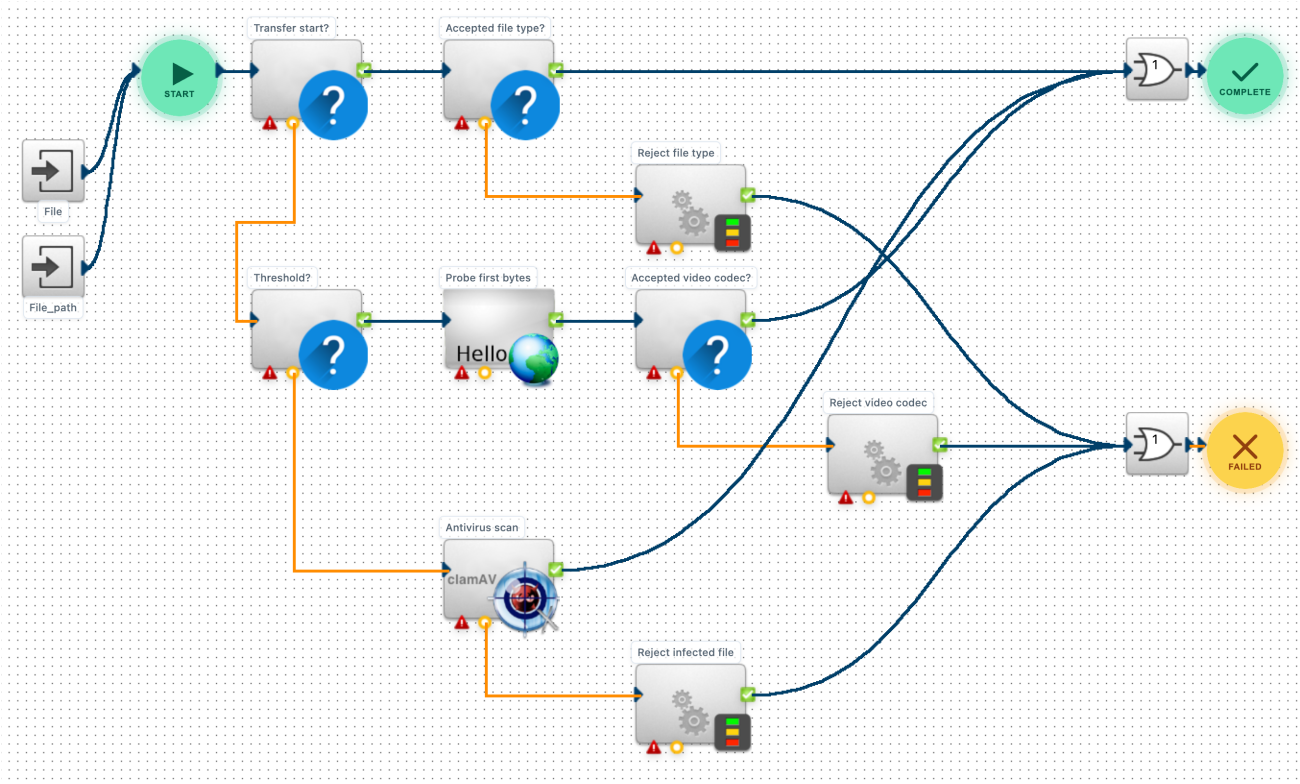

Pattern - inline validation: the event of the call selects the check (file type at start, video codec of the first bytes at the threshold, antivirus at the end); each rejection sets the message for the user

- 4.1.5 and 4.1.6 refuse the call (Known issues), and `ascp` cannot authenticate while Use Secure JWT API Auth is set, an option that applies to the whole REST API. In these cases, validate after the transfer instead (`AsperaOtfv`, or a trigger workflow).
- Each file of each transfer creates up to three work orders: tune Orchestrator for the HTTP load, or validate after the transfer instead (`AsperaOtfv`), which does not block `ascp`.
- Reject at the earliest event that can decide: rejecting at start (for example on the file name) saves the bandwidth and storage of a file that would be refused.
- Set the reason of the rejection with `ExitStatus` before Failed: it is the message the user sees.
- Set IFV Skip Start Event when the workflow does nothing at start.
- Keep the workflow short: the user sees the transfer at 99 % until the validation ends, and a slow workflow looks like a stuck transfer. For long checks such as antivirus, increase `session_timeout_sec`: after this time, `ascp` rejects the file.
- Do not rely on a threshold rejection to stop a file: the transfer does not pause, and the file may be complete when the answer arrives.
- A rejection also stops the files not yet received: if one bad file must not block the others, validate after the transfer instead.
- Have the workflow move or delete a file that it rejects at the end: `ascp` leaves the complete file under its final name.

- With a partial file suffix, a step that reads the file at the threshold adds the suffix to `File_path`.
- Do not count on it for clients that fall back to HTTP, which are not validated.
- `validation_uri` holds a password: use a user who has only the run permission on the workflow, and set `validation_secure`, so that `ascp` checks the certificate of Orchestrator.

2.16 Deploying and changing workflows

- Plan workflow changes: one day before changing a trigger workflow, pause watchers and queues and let running work orders finish. A changed sub-workflow may receive wrong inputs from a running parent.
- Move workflows between servers by export and import, or with the deploy feature (3.x), Git integration (4.x), or snapshots.
- An export does not contain the external files of a workflow: parameter set and lookup table files, user input forms, direct start pages, payload files, images, portlets. Copy them.
- At import, refer to existing templates and remote nodes rather than overwriting them: overwriting creates a second version of the template, used only by the imported workflow.
- A safe procedure: rename the existing workflows with a backup suffix (or move them to a backup folder), import the new versions keeping existing templates and remote nodes, and start the new top-level workflows with new work orders, not relaunches of the old ones.
- The plugin code is not in the export: the target uses its own plugin versions. Import or enable the plugins first.
- Plugins and capsules (hot fixes) are installed by hand; subscribe to the notifications of new capsules, which may fix critical bugs, and force maintenance after installing one. Importing a plugin does not activate it: upgrade it to the imported version, and archive the running version first to be able to revert. On a cluster, import on one server, then reload the plugins and force maintenance on each server.
- Keep a test server, with the same versions as production.

2.17 Practices checklist

Design:

- [ ] The trigger workflow and the processing workflow (with parameters) are separate.
- [ ] Each foreseeable error has a way out, and unhandled cases end with a clear message.
- [ ] Heavy or long steps are protected by a resource pool, when volume requires it.
- [ ] Workflows have 20 steps at most; repeated blocks are sub-workflows or templates.

Trigger:

- [ ] One trigger with Continue monitoring from start to end.
- [ ] Persistency scope chosen; never none with Continue monitoring.
- [ ] Detected files are moved out of the watched folder; temporary files are excluded.
- [ ] Polling period of 5 seconds or more.
- [ ] A workflow monitor restarts the trigger workflow.

Graph:

- [ ] Each join of exclusive branches (if and else, complete and failed, error paths) has an OR.
- [ ] No link back to a previous step.
- [ ] One step between each fan-out and its funnel-in; empty lists are handled.
- [ ] Retries are set only on linked exits.
- [ ] Every path after a resource reservation releases it.

Data and configuration:

- [ ] Parameters are linked to Start.
- [ ] Outputs needed later are carried through; inserted steps carry everything through.
- [ ] No constant, address or credential in steps or code: parameter sets, lookup tables, remote nodes.
- [ ] Lookup tables have their key mapped and no empty cells.
- [ ] Load managers in the same work order as their queue have the expected queued item mapped; queues have auto-purge on work order stop.

Readability:

- [ ] Steps and configurations named before creation; conventions followed.
- [ ] Work order label shows the processed element.

- [ ] Exit status messages for each end.
- [ ] Journal entries or other reports for operators.
- [ ] Comments in steps and Ruby code.

Tests and changes:

- [ ] Each block was tested alone, with test folders.
- [ ] After a structural change, new work orders were started (relaunch, not reset).
- [ ] External files and plugin versions are deployed with the workflow.

Chapter 3

Workflow authoring

This chapter is the reference for what Orchestrator accepts and how it runs a workflow. Read it to write a workflow as a file, without the designer, or to check the exact behavior of a step, a link or a setting. For which choice to make among the valid ones, see Workflow development practices.

3.1 Quick start

The following file is a complete workflow with one step that returns a message. It uses the plain format, which is the simplest to write.

```
---
- !ruby/object:Workflow
  attributes:
    name: hello
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters></Parameters></Start>
      <Error x="900" y="350"
↪   id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="900" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪   id="step1" status="Complete"/></Prerequisites></End>
      <Fail x="900" y="200"
↪   id="fail"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Fail>
      <Steps>
      <Step x="400" y="50" id="step1"><Action_id>1</Action_id><Step_name>Say
↪   hello</Step_name><Step_type>CustomRuby</Step_type><Synch_factor>0</Synch_factor><Prerequisites><Prerequ
↪   id="start"
↪   status="true"/></Prerequisites><Parameters></Parameters><Inputs></Inputs><Outputs></Outputs></Step>
      </Steps>
      <Parameters></Parameters><Notes></Notes>
      </Workflow>
- CustomRuby__1: !ruby/object:CustomRuby
    attributes:
      name: W0__Say hello
      execute_code: "outputs['message'] = 'Hello'"
      typed_outputs: "{'message'=>'string'}"
- CustomRuby__1: []
- {}
- CustomRuby: 0.7.0
```

Import, publish and run it with the IBM Aspera CLI (`ascli`). First store the connection once, in a preset that becomes the default for command `orchestrator`:

```
ascli config preset update orch --url=https://<HOST>/aspera/orchestrator --username=<USERNAME>
 ↪  --password=@secret:password
ascli config preset set default orchestrator orch
```

`@secret:` asks for the password on the terminal, so that it stays out of the shell history (see Using secrets). Option `--auth_style` chooses how `ascli` authenticates. The default, `token`, calls `api/login`, which answers with status 403 when Use Secure JWT API Auth is not set (see REST API): `ascli` then stops with an authentication error, and the preset needs `--auth_style=basic`.

```
ascli orchestrator workflows check_import hello.yml    # no server needed: prints "no problem found"
ascli orchestrator workflows import hello.yml          # displays the new workflow, including its id,
 ↪  for example 239
ascli orchestrator workflows publish 239
ascli orchestrator workflows start 239 @json:'{}' @json:'{"step":"Say hello","variable":"message"}'
```

The last command waits for the work order to finish and displays `Hello`. The same operations with the REST API are described in REST API.

3.2 Lifecycle

1. Write a workflow file (`.yml`), or a package (`.wkf`) that also contains sub-workflows and remote nodes.
2. Check it, with no server: `ascli orchestrator workflows check_import <FILE>` reports part of the rules of the authoring checklist, which Orchestrator does not check on import.
3. Import it: Orchestrator creates a new workflow with a new `id`. Each step's action template is created (or mapped to an existing global template). The workflow is published when field `publish_workflow` of the request is `true` or `1`, or, without this field, when the server option `publish_api_imported_workflow` is set, which it is not by default.
4. Publish it: Orchestrator builds the runnable workflow from the last whiteboard revision.
5. Start it: Orchestrator creates a work order. Runtime parameters are given at this point.
6. Read the work order status and outputs.

Rules:

- Import and publish do not validate the graph. Publish only requires the whiteboard attribute `error_free` to be set. An invalid graph is published and fails at run time, or never ends. Use `check_import` and the authoring checklist.
- An import through `import_workflow` always creates a new workflow. If the name is already used, Orchestrator appends a space and `(import_1)`, `(import_2)`, and so on. The `portable_id` of the file is ignored and a new one is generated. The import in the web UI and `import_with_constraints` keep it instead, unless a workflow of the server already has it.
- To add a revision to an existing workflow instead, use `import_with_constraints` with `add as revision`. See Update an existing workflow.
- The API has no operation to delete a workflow: delete it in the user interface.
- Web UI: opened from the list of workflows, the designer draws the published revision from the published steps and from the positions in its XML. The Revisions tab draws the XML of the chosen revision. If the designer shows an empty canvas, the graph is not lost, and importing again does not help: a `Synch_factor` other than `0` has no position (see Prerequisites and branches); the Revisions tab still shows the graph. Never click "Publish" on an empty canvas: this publishes an empty graph. A revision imported through the API is shown as created by *Unknown user*.

3.3 Workflow file

3.3.1 File types

Extension	Content
`.yml`	One workflow, as described in this guide.
`.wkf`	A gzipped tar archive containing a manifest file `<NAME>.txt` and the files it lists. The manifest is a YAML list of file names: the first one is the main workflow (`.yml`), the others are its dependencies: sub-workflows (`Workflow_*.yml`) and remote nodes (`Remote_node*.node`). `export_workflow` produces this format when dependencies are exported.

The file name given to `import_workflow` must end with `yml` or `wkf`.

3.3.2 Structure

A workflow file is a YAML sequence of exactly six elements, in this order:

#	Element	Content
1	Workflow	Workflow attributes: name, description, ... See Workflow attributes.
2	Whiteboard	The graph (`xml_export`) and its state. See Whiteboard attributes.
3	Action templates	A map: key `<STEP_TYPE>__<N>`, value the template object. See Action templates.
4	Dependency list	A map: same keys as element 3, value the list of external entities used by the template (written by `export_workflow`).
5	Packed dependencies	A map of dependencies included in a `.wkf` package. `{}` for a `.yml` file.
6	Plugin versions	A map: plugin name to version. Informational: not checked on import.

Rule for element 4 and 5: element 4 is used only for the dependencies packed in element 5. When element 5 is empty (a `.yml` file), element 4 is ignored, and template attributes are imported as written: see Referring to existing entities. In a hand-written file, use `{}` or empty lists in element 4.

The file can be written in two encodings. Both are accepted by the import.

3.3.3 Plain format

The plain format is the old (Orchestrator 4.0) format. It is the simplest to write, and the one used in this guide.

A file is in plain format when no line matches `concise_attributes:`. On import, Orchestrator converts it to the current format, line by line, and then loads it. That converter is line-based, so the layout rules matter:

- An optional first line `---`.
- Each of the six elements starts with a dash and a space (`-` then space) at column 0.
  - Element 1 starts with `- !ruby/object:Workflow`.
  - Element 3 starts with `- <STEP_TYPE>__<N>: !ruby/object:<STEP_TYPE>` for the first template. Each next template starts with a line `<STEP_TYPE>__<N>: !ruby/object:<STEP_TYPE>` (any indentation). The separator must be exactly `: !ruby/object:`.
- A line `attributes:` is optional and ignored.
- The other lines of a section are its attributes, one `name: value` per line, with the same indentation within a section. Block scalars (`|`) are allowed, for example for `xml_export`, and for template attributes such as `execute_code` (Ruby code) or a private key in PEM format. In a double-quoted value, YAML escapes apply, for example `\r\n` between lines of `parameters_associations` of `SimpleParameterLookup`.
- The class of a template is the part of its key before `__`.
- An unknown attribute name makes the import fail.
- In element 1, attributes with a null value are ignored.
- In element 3, attributes with a *blank* value are ignored: `null`, empty string, and also `false`. For a boolean attribute, write `1` or `0`, not `true` or `false`: `0` is kept, `false` is dropped (the database default then applies).
- Elements 4, 5 and 6 are required, even when empty.

On the server, the uploaded file is rewritten in the current format.

3.3.4 Rails format

This is the format produced by `export_workflow`: YAML serialization of Rails objects. Each attribute is an item of `concise_attributes`:

```
- !ruby/object:Workflow
  concise_attributes:
  - !ruby/object:ActiveModel::Attribute::FromDatabase
    name: name
```

```
    value_before_type_cast: My workflow
  - !ruby/object:ActiveModel::Attribute::FromDatabase
    name: label
  new_record: false
  active_record_yaml_version: 2
```

An attribute without `value_before_type_cast` is null. In element 3, each template has the same form, under its key (`- CustomRuby__2: !ruby/object:CustomRuby`).

To read an exported workflow, look for the attribute names given in this guide. To write a workflow, prefer the plain format.

3.3.5 Workflow attributes

Columns of a workflow, and how `import_workflow` uses them:

Attribute	Type	On import
`name`	string	Used. Suffixed with a space and `(import_N)` if already used.
`description`	text	Used.
`run_as`	string	Used. One of `SYSTEM`, `CREATOR`, `OPERATOR`.
`label`	string	Used.
`tags`	text	Used. Stored as `|tag1|tag2|`.
`templates`	text	Used.
`max_running`	integer	Used. Maximum number of running work orders of this workflow.
`cleanup_after_days`	integer	Used.
`purge_after_days`	integer	Used.
`user_lock`, `locked_by`	boolean, integer	Used.
`created_by`	integer	Replaced by the importing user.
`portable_id`	string	Replaced by a new UUID.
`source_revision`	string	Replaced by `<NAME>|<REVISION>`.
`comments`	text	Replaced by `Imported from file <PATH>`.
`id`, `folder_id`, `revision_id`, `generated_from`, `created_at`, `updated_at`		Ignored. The folder is given by the import request.

The minimum is `name`, and `run_as` is recommended.

3.3.6 Whiteboard attributes

Attribute	Type	Rule
`xml_export`	text	Required. The graph. See Graph XML.
`error_free`	boolean	Required to publish. Publish returns `false` if it is null. Set it to `true`: it is not computed on import.
`revision_id`	integer	Optional. Defaults to 1.
`created_by`, `workflow_id`, `revisions_log`, `id`, `created_at`, `updated_at`		Ignored or replaced.

3.3.7 Action templates

Element 3 maps each key `<STEP_TYPE>__<N>` to an action template.

- `<STEP_TYPE>` is the plugin class name, for example `CustomRuby`, and must be the `Step_type` of the steps using it.

- `<N>` is a number unique within the file for that type, and must be the `Action_id` of the steps using it. On import, the template gets a new database id and the graph is updated: `Action_id` of steps, and `action_id` of `Map_to` and `Carry_thru` of type `output`.
- The value holds the template attributes: the plugin settings. The attribute names of each plugin are listed in the Action Template Reference.
- Attribute `name` decides how the template is imported:
  - `W<ANY_NUMBER>__<STEP_NAME>`: embedded template. It is created for the new workflow and renamed `W<NEW_WORKFLOW_ID>__<STEP_NAME>`. Use this form, with `W0__` and the step name.
  - Any other name: global template. If a template of the same class and name exists and has the same attributes, it is reused. If it differs, a new template named `<NAME> (import_N)` is created. If none exists, it is created.
- Plugins that are not enabled on the server are enabled automatically by `import_workflow`. If that fails, the import returns the list of missing plugins.

How a template defines the inputs of its step is explained in Inputs of a step.

3.3.8 Referring to existing entities

A template refers to an entity of the server (a workflow, a remote node, a journal book...) by the value of one of its attributes. In a `.yml` file, element 4 is ignored (see Structure): the import keeps the value written, and does not check that the entity exists. So write the reference in the attribute, as the entity is known on the target server, and leave element 4 empty.

Entity	Template attribute	Value
Workflow	`SubWorkflow`: `workflow_id`, `workflow_portable_id`	Id of the workflow (see below for the portable id).
Workflow	`WorkflowLauncher`: `workflow_id`	Id of the workflow. Or `workflow_id` blank, `use_portable_id` set to `1`, and `portable_id`: the portable id of the workflow, looked up at execution.
Remote node	`remote_node`, and other attributes with widget `remote_node` in the plugin specification	Name of the node.
Journal book	Step element `Journaling` of the graph	Name of the book. The import creates it if missing.
Journal book	`FileJournalLogEntry`: `journal_book`	Name of an existing book. It is not created: the entries are then written without a book.
Mailer	`EmailNotification`, `UserInput`: `mailer_name`	Name of a mailer configuration. Blank: the first active one.
Global action template	Element 3	A template with the same class, name and attributes: see Action templates.

Ids and portable ids of workflows are given by `ascli orchestrator workflows list`. No API lists the other entities: ask the administrator of the server.

`SubWorkflow`: each time its template is saved, import included, `workflow_portable_id` wins: if it is the portable id of a workflow of the server, `workflow_id` is set to the id of that workflow; otherwise, if `workflow_id` is the id of a workflow, `workflow_portable_id` is set to its portable id. `import_workflow` gives a new portable id to each workflow it creates (see Workflow attributes): a portable id read on another server does not match. Write `workflow_id`, and leave `workflow_portable_id` blank. The import in the web UI and import_with_constraints keep the portable id of the file, unless a workflow of the server already has it: with them, a portable id written in the template matches the workflow imported from the same file.

Packages (`.wkf`): with dependencies, `export_workflow` lists in element 4 each entity a template uses, for example `{entity: Workflow, id_key: id, id_value: 4, dependent_field: workflow_id}`, and packs sub-workflows and remote nodes (element 5). On import, each packed sub-workflow is imported first, and the attribute named by `dependent_field` is set to the `id_key` of the new entity. With `import_workflow`:

- Remote nodes of the package are not imported: the attribute keeps the node name, and the node must exist on the server. `import_with_constraints` imports or maps them (see import_with_constraints).

- Field `link_to_subworkflows` set to `true`: a packed sub-workflow that was already imported (a workflow with the same name and a `source_revision` equal to `<NAME>|<REVISION_ID>` of the packed file) is used instead of a new copy. The value is evaluated as Ruby code: only `true` links, and in a package with sub-workflows, a word other than `true` or `false` makes the import fail.

3.4 Graph XML

The whiteboard attribute `xml_export` holds the graph as XML. Validate a workflow file before import with the IBM Aspera CLI:

```
ascli orchestrator workflows check_import my_workflow.yml
```

3.4.1 Skeleton

```
<?xml version="1.0" encoding="UTF-8"?>
<Workflow id="0">
<Start x="100" y="50" id="start"><Parameters></Parameters></Start>
<Error x="900" y="350"
 ↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
<End x="900" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites>...</Prerequisites></End>
<Fail x="900" y="200" id="fail"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Fail>
<Steps>
  <Step ...>...</Step>
</Steps>
<Parameters>...</Parameters>
<Notes></Notes>
</Workflow>
```

General rules:

- The root element name is free, `Workflow` by convention. Its attribute `id` is replaced on import: use `0`.
- The elements `Start`, `End`, `Fail` and `Error` are required, exactly once each.
- At least one `Step` is required.
- `Parameters` (top level) and `Notes` are optional.
- Attribute `id` of every node is a string, unique in the graph, used to link nodes. The designer uses UUIDs; any unique string works, for example `start` or `step1`.
- Attributes `x` and `y` are the position of the node in the designer. They do not change execution.
- Usual XML escaping applies (`&`, `<`, `"`). Values of parameters and of inputs mapped to a value are also URL-decoded: `%XX` and `%uXXXX` sequences are decoded. Write `%25` for a literal `%` followed by two hexadecimal digits.
- On import, the graph is parsed and stored written again: root element `opt`, one element per line with indentation, attribute values in double quotes, and the new template ids in `Action_id` and in `action_id` of `Map_to` and `Carry_thru`. This is observed with both formats of file, and with `import_with_constraints`: the export of an imported workflow shows this form, not the one of the file.

3.4.2 Terminal nodes

Element	Required children	Meaning
`Start`	none (`Parameters` optional)	Entry point. Its `Parameters` links declare the global parameters (see Parameters).
`End`	`Synch_factor`, `Prerequisites`	Reached: the work order is `Complete`.
`Fail`	`Synch_factor`, `Prerequisites`	Reached: the work order is `Failed`.
`Error`	`Synch_factor`, `Prerequisites`	Reached: the work order is `Error`.

The first of these nodes reached ends the work order: the steps still running on other branches are cancelled.

`Fail` and `Error` are also reached implicitly: when a work step ends with status `Failed` (or `Error`) and no step is connected to it for that status, the work order goes to `Fail` (or `Error`). So only success paths need to be connected to `End`; failures do not need explicit links. The status details of the work order are then `No behavior defined for step status change to <STATUS> - in <STEP_NAME>`. The reason of the failure is in key `step_status_details` of output `<STEP_NAME>:Step_information`: `ascli orchestrator workorders output <WORK_ORDER_ID>` shows it.

3.4.3 Step

Each `Step` element has attributes `id`, `x`, `y`, and these children:

Child	Required	Content
`Action_id`	yes	Number `<N>` of the template key `<STEP_TYPE>__<N>`.
`Step_name`	yes	Name of the step, unique in the workflow. Used to name outputs (`<STEP_NAME>:<OUTPUT>`) and in `Map_to` of type `output`.
`Step_type`	yes	Plugin class name, for example `CustomRuby`.
`Synch_factor`	yes	Number of prerequisites to meet. See Prerequisites and branches. When it is not `0`, attributes `x` and `y` (position of the join symbol) are needed by the designer.
`Prerequisites`	yes (to be valid)	Links from previous nodes.
`Inputs`	yes (may be empty)	Inputs of the step. See Inputs.
`Outputs`	yes (may be empty)	Output settings and carry-throughs. See Outputs.
`Parameters`	no	Links to step parameters. See Parameters.
`Version`	no	Plugin version, informational.
`Pre_processing`	no	Ruby code run before the action. See Processing code.
`Post_processing`	no	Ruby code run after the action.
`Timeout`	no	Execution timeout in seconds. See Timeouts.
`On_timeout`	no	Status on timeout: `Pass` (Complete), `Fail` (Failed, the default), `Error` (Error), `Raise` (Error, and the work order timeout action runs).
`Error_attempts`	no	Maximum attempts when the step ends with `Error` and a branch with status `Error` leaves it.
`Error_retryFor`, `Error_retryForUnit`	no	Retry period: value multiplied by unit (seconds).
`Error_retryDelay`	no	Delay between attempts, in seconds.
`Failed_attempts`, `Failed_retryFor`, `Failed_retryForUnit`, `Failed_retryDelay`	no	Same, for status `Failed`.
`comments`	no	Description of the step.
`weight`	no	Integer, used for progress display.
`Journaling`	no	Journal entry settings (`Book`, `Event`, `Package`, `File`, `File_path`, `File_status`, `JournalStepMilestone`, `JournalProcessingTimeout`). A missing journal book is created on import.

Element names are case-sensitive and must be written exactly as above. The parser ignores unknown elements: a misspelled optional element has no effect.

3.4.4 Prerequisites and branches

A `Prerequisite` element links a previous node to the current one:

```
<Prerequisites><Prerequisite id="check" status="Complete"/></Prerequisites>
```

Attribute	Content
`id`	`id` of the previous node.
`status`	Status of the previous node that activates the link. `true` for a link from `Start`. Otherwise the final status of the previous step: `Complete`, `Failed` or `Error` (compared case-insensitively).
`router`	Line style of the link in the designer (no effect on execution), chosen with a right-click on the link: `draw2d.ManhattanConnectionRouter` (right angles, the default when the attribute is absent), `draw2d.BezierConnectionRouter` (curve), `draw2d.NullConnectionRouter` (straight line), `draw2d.FanConnectionRouter` (straight lines spread apart when several links join the same two nodes). The designer uses the value as a JavaScript class name: no other value. Use Manhattan for step prerequisites and Bezier for parameter links; use Bezier on a step prerequisite only where the graph reads better, for example when a Manhattan line would cross a step.

`Synch_factor` sets how many prerequisites must be met:

Value	Meaning
`0`	All prerequisites (AND).
`N` > 0	At least `N` prerequisites. `1` is OR: for example `End` after alternative branches.
negative	Never met: do not use. For a value of `-N`, the engine requires the number of prerequisites plus `N`, which is more than exist, although "all but `N`" was intended. For "all but `N`", set the positive value: number of prerequisites minus `N`. The designer refuses negative values.

When `Synch_factor` is not `0`, the designer draws a join symbol, at the position given by attributes `x` and `y` of `Synch_factor`. Write them, on steps and on `End`, `Fail` and `Error`: `<Synch_factor x="920" y="70">1</Synch_factor>`. The engine ignores them, but without them, the workflow opened from the list of workflows shows an empty canvas (see Known issues).

A link from `Start` always counts as met.

A step can have several outgoing links (several steps referencing it): steps whose prerequisites are met run in parallel.

To branch on a condition, make a step end with `Complete` or `Failed`, and connect different steps to each status. The `Filter` plugin does exactly that with a Ruby expression; a `CustomRuby` step can set `@status`. See Recipe: branch on a status.

3.4.5 Inputs

```
<Inputs>
  <Input name="person"><Map_to type="parameter" name="who"/></Input>
  <Input name="text"><Map_to type="output" name="greeting" step_type="CustomRuby" action_id="1"
↪  step_name="Greet"/><Processing>input_value = input_value + '!'</Processing></Input>
</Inputs>
```

Attribute `name` of `Input` is the name of an input of the step, as declared by the action template (see Inputs of a step). An `Input` whose name is not declared by the template is silently ignored.

`Map_to` gives the source of the value:

`type`	Other attributes	Source
`value`	`name`: the literal value	A constant. For an input of type `array`, a value not starting with `[` is wrapped into a one-element array.
`parameter`	`name`: parameter name	A parameter (see Parameters).
`global`	`name`: parameter name	Same as `parameter`.
`output`	`name`: output name, `step_name`, `step_type`, `action_id`	An output of a previous step. `step_name`, `step_type` and `action_id` must be the `Step_name`, `Step_type` and `Action_id` of that step.

Optional child `Processing`: Ruby code that transforms the value (see Processing code).

Every required input of the template must have an `Input` element.

3.4.6 Outputs

The outputs of a step are those declared by its action template, plus `Step_information`. They all exist, whether or not the `Outputs` element lists them. Each output is a variable named `<STEP_NAME>:<OUTPUT_NAME>`.

The `Outputs` element only adds settings:

```
<Outputs>
  <Output name="file_name"><Processing>output_value = output_value.upcase</Processing></Output>
  <Carry_thru type="output" name="file" step_type="ArrayFanout" action_id="33" step_name="Fan out"/>
</Outputs>
```

Element	Content
`Output`	Attribute `name`. Optional children: `Processing` (Ruby code transforming the value), `Global` (name of a global variable that also receives the value).
`Carry_thru`	Makes a variable available as an input of this step without the plugin declaring it: at run time, the value is in `@inputs` under `<NAME>` and `<STEP_NAME>/<NAME>`. Attributes: `type` (`output` or `parameter`), `name`, and for `output`: `step_name`, `step_type`, `action_id`.

An input can be mapped to an output of any step of the graph, not only of a step linked to it: the recipes queue, one work order per file and operator decision map outputs of the step before the previous one, without `Carry_thru`. The designer has a narrower rule: the mapping list of a step offers only the outputs of the steps linked to it, the variables they carry through, and the global parameters. There, `Carry_thru` is the way to offer an output to the step after the next one. A mapping to an output that the list does not offer, such as one set by a file, is kept when the step is edited in the designer, but the list then shows [Select]; choosing [Select] removes the mapping. In a file, map the output directly.

Output `Step_information` is a `hash` with keys `step_id`, `step_name`, `step_status`, `step_status_details`, `attempts`, `processingTime`, `elapsedTime`, `completionTime`.

3.4.7 Parameters

A parameter is defined once in the top-level `Parameters` element, and linked to `Start` (global parameter) or to a step (step parameter):

```
<Start x="100" y="50" id="start"><Parameters><Parameter id="p_who"/></Parameters></Start>
...
<Parameters>
  <Parameter x="100" y="200" id="p_who">
    <Name>who</Name><Value>world</Value><Value_type>string</Value_type>
    <Runtime_override>true</Runtime_override><Runtime_optional>true</Runtime_optional>
  </Parameter>
</Parameters>
```

Definition (`Parameter` with attributes `id`, `x`, `y`):

Child	Content
`Name`	Name, used in `Map_to` of type `parameter` and when starting the workflow.
`Value`	Value at design time, or default value of a runtime parameter. Use JSON for `array` and `hash`, for example `["/tmp/a", "/tmp/b"]`.
`Value_type`	One of the value types.
`Runtime_override`	`true`: the value can be given when starting the workflow. Default `false`.
`Runtime_optional`	`true`: a runtime value is optional, and `Value` is used when absent. Default `false`.
`Comments`	Description.

Link (`Parameter` with attribute `id`, and `router="draw2d.BezierConnectionRouter"` for the designer) in `Start/Parameters` or `Step/Parameters`.

Rules:

- A parameter that is not linked to `Start` or to a step does not exist after publish: inputs mapped to it are silently not created.
- Runtime parameters are the inputs of the workflow: `workflow_inputs_spec` lists them, and `initiate` receives them as `external_parameters`.
- A step parameter is a parameter linked to a step instead of (or in addition to) `Start`. Linking a parameter to a step does not change its value or scope: the engine sets all parameters when the work order starts, and an input of any step maps to the parameter by name. The designer uses step parameter links to draw the parameter node near the step, and offers a step parameter only in the mappings of the steps it is linked to. In practice, link a parameter to `Start` and map the input directly.

3.4.8 Value types

Type	Content
`string`	Text.
`int`	Integer.
`float`	Floating point number.
`flag`	Boolean.
`date`	Date and time.
`array`	List (JSON array).
`hash`	Map (JSON object).
`object`	Any serializable value.
`pwd`	Password, hidden in the user interface, and encrypted in the published workflow and in work orders. The `Value` of a `pwd` parameter is in clear in the graph XML and in exports: give secrets at run time. See Secrets.
`attachment`	File attachment.

3.4.9 Notes

`Notes` holds designer notes: `<Note id="..." note_id="..." x="..." y="..." collapsed="..."><Text>...</Text></Note>`. They do not change execution.

3.5 Inputs of a step

The inputs of a step are declared by its action template, in method `inputs_spec` of the plugin: a map of required inputs and a map of optional inputs, each from name to value type. The Action Template Reference lists them for each plugin.

Many plugins derive inputs from some of their template attributes:

- A text attribute left blank in the template becomes an input, so its value can come from the graph at run time. The Action Template Reference gives its name in column Input if blank.
  - Input name: the value of the plugin constant `VAR_<ATTRIBUTE>` if it exists, else the attribute name with its first letter in upper case (for example `file_path` gives `File_path`).
  - The input is optional if the plugin defines a constant `DEFAULT_<ATTRIBUTE>`, else required.
  - An attribute name ending with `_<TYPE>` (for example `delay_int`) gives an input of that type, named without the suffix (`Delay`).
- A text attribute that is set can contain placeholders `<%= variable %>`: each one creates an input.
- A non-text attribute left null becomes an input of the corresponding type.

So the same plugin can have different inputs depending on its template. For example, `LocalFileWatcher` with `directory` left blank has a required input `directory`.

Plugins that let the template declare its inputs and outputs explicitly (for example `CustomRuby` and `Filter`) take them as a type map in text: JSON (`{"person":"string"}`) or Ruby hash syntax (`{'person'=>'string'}`).

Before calling the action, Orchestrator adds these inputs: `OUTPUTS` (names and types of the outputs), `WORKORDER_ID` (the work step id), `ATTEMPT`, `RUNNING_AS`.

3.5.1 Placeholders

A text attribute marked `placeholders: true` in plugins.yml can contain ERB placeholders. Each variable they name becomes an input of the step, and the plugin replaces the placeholders with the input values at run time. For example, an `EmailNotification` template with `template` (the message body) set to `Hello <%= user_name %>, <%= file_name %> is ready.` gives required inputs `user_name` and `file_name`.

Placeholders in an attribute that is not marked create no input. This is the case of some attributes that give an input when left blank.

These forms create inputs:

Placeholder	Creates input	Replaced by
`<%= name %>`	`name`	The value of input `name`.
`<%= function(a, b) %>`	`a`, `b`	The result of `function` called with the values of inputs `a` and `b`. Arguments are input names, not literal values. `function` is a method of the plugin (for example `proxy_tag` of `ItunesTransporter`), `xml` (a hash as XML elements: `{'v'=>[1, 2]}` gives `<v>1</v><v>2</v>`), or a method with its class (for example `File.basename`).
`var(name)` in an expression	`name`	`var(name)` returns the value of input `name`, for example `<%= var(file_count).to_i + 1 %>`.

Any other Ruby code in `<%= ... %>` runs, but creates no input: in `<%= file_name.upcase %>`, `file_name` is not an input of the step, unless another placeholder declares it. Write `<%= var(file_name).upcase %>`. A function call creates inputs only when the placeholder is the call alone and all its arguments are names: `<%= File.join(dir, 'sub') %>` (a literal), `<%= File.join(File.dirname(path), name) %>` (a nested call) and `<%= File.basename(path).upcase %>` create no input. Write `<%= File.join(var(dir), 'sub') %>`. At run time, a variable that is not an input is `nil`, and the code fails, for example with `no implicit conversion of nil into String`. `var` is only for expressions: `<%= var(file_name) %>` alone fails, write `<%= file_name %>`.

The input created by a placeholder:

- Has the name written in the placeholder: letters, digits and `_`.
- Is a `string`, unless the name ends with `_<TYPE>`, where `<TYPE>` is a value type: `<%= count_int %>` gives input `count_int` (the suffix is kept) of type `int`, and `<%= start_date %>` gives input `start_date` of type `date`.
- Is required, unless the plugin defines a constant `DEFAULT_<NAME>`.
- Is not created if the name is a method of the template that returns a value: `name` (the template name) or another attribute of the template that is set. That value is used.

Some plugins scan placeholders with their own code instead of `default_inputs_spec` (for example `Filter`): the input is a required `string`, unless the template declares it otherwise (`mandatory_inputs` and `optional_inputs` of `Filter`).

Placeholders are scanned only in the value set in the template: the ones in `code_default` (attribute left blank) create no input.

At run time:

- An input without a value is replaced by an empty string.
- An array is written in Ruby notation: `[1, 2]`.
- `<% ... %>` tags (code without output, for example `<% if ... %>`) run only when the value also contains an expression such as `<%= var(file_name).upcase %>`: do not rely on them.

`FileGenerator` evaluates its whole template (`file_body_template`) as ERB, `<% ... %>` tags included, with the inputs declared in `required_inputs` and `optional_inputs`. An input is read through the missing-method mechanism of the plugin: an input named like a method that exists (of Ruby, or a global method of Orchestrator such as `md5`) calls that

method instead, and the step fails, for example with "wrong number of arguments (given 0, expected 1..4)" (tested on 4.1.6). The form of 4.1.6 mentions a `{{variable_name}}` syntax: it is not supported.

3.5.2 Plugin specifications

The file plugins.yml gives, for each plugin, its template attributes and the inputs and outputs of its steps, with the template settings they depend on. They were found by calling methods `inputs_spec` and `outputs_spec` of the plugin on templates with one or two attributes changed. Read one plugin with `ascli orchestrator plugins spec <PLUGIN_CLASS>`, or with `yq '.<PLUGIN_CLASS>' plugins.yml`.

Each plugin is a key, its class name: the `Step_type` of a step, and the class of its template (key `<PLUGIN_CLASS>__<N>`).

```
AmazonS3Operation:
  attributes:
    operation: {type: string, label: File Operation, widget: select, values: [upload, delete, list,
↪   ...]}
    aws_key: {type: string, hint: Enter AWS access key ID}
  inputs:
    Aws_key: {type: string, required: true, if_blank: aws_key}
    Local_file_path: {type: string, required: true, if_blank: local_file_path, when: {operation:
↪   {in: [upload, download]}}}
  outputs:
    ETag: {type: string, when: {operation: {in: [upload, copy object]}}}
```

Attributes (besides `name` and `comments`, common to all templates):

Field	Content
`type`	Database column type. In plain format, write a boolean as `1` or `0`.
`label`	Label in the template editor, when it is not the attribute name (`aws_key`: `Aws key`).
`widget`	When not text or boolean: `select`, `multiline_text`, `password`, `number`, `remote_node` (name of a remote node), `type_map` (`{'name'=>'type'}`), `list`, `hash`, `file`, `action_template` (name of a template).
`values`	Allowed values.
`dynamic_values`	`true`: allowed values come from the server or an external system.
`run_time_value`	For a `remote_node`: value that makes the node an input of the step.
`default`	Database default.
`code_default`	Value used by the plugin when the attribute is blank.
`hint`	Placeholder text in the template editor.
`format`	Language of the value (code editor).
`placeholders`	`true`: placeholders in the value create inputs (`<%= variable %>`, `<%= function(variable, ...) %>`, `var(variable)` in an expression). Not set: placeholders in the value are not scanned, even if the attribute gives an input when blank.
`declares`	The value declares inputs or outputs of the step (`required_inputs`, `optional_inputs`, `outputs`), as a type map or a list.

Inputs and outputs (a name in angle brackets is the value of that template attribute):

Field	Content
`type`	Value type.
`required`	Inputs: `true`, `false`, or the condition for which the input is required (`{if_blank: ...}`, `{if_set: ...}`, `{when: ...}`).
`if_blank`	Exists only when this attribute is blank (for an input: it replaces the attribute), or when all attributes of the list are blank.
`if_set`	Exists only when this attribute (or all of the list) is not blank.
`when`	Exists only for some values of attributes: `{<ATTRIBUTE>: {in: [...]}}` (`null`: attribute blank) or `{<ATTRIBUTE>: {not_in: [...]}}` (set to another value).

Field	Content
`conditional`	`true`: other template settings also decide whether it exists, the conditions given are not complete.

`if_blank`, `if_set` and `when` must all match, unless `conditional` is `true`.

3.6 Execution

3.6.1 Retries

When a step ends with `Error` (or `Failed`) and a branch with that status leaves it, the step can be retried before that branch is followed: up to `Error_attempts` (or `Failed_attempts`) attempts, within `Error_retryFor` x `Error_retryForUnit` seconds, waiting `Error_retryDelay` seconds between attempts.

The designer has one retry tab for failure and one for error:

Designer	Element	Content
Maximum number of attempts	`Error_attempts`, `Failed_attempts`	Attempts, the first one included.
Retry duration (retry for)	`Error_retryFor` x `Error_retryForUnit`, `Failed_retryFor` x `Failed_retryForUnit`	Total time for retries.
Delay between attempts	`Error_retryDelay`, `Failed_retryDelay`	Minimum delay, in seconds.

Rules:

- `0` means no limit, for the attempts and for the period. So does a blank value, when the other one is set.
- Both limits apply: retries stop at the first one reached. They are checked when an attempt ends, so an attempt that starts before the end of the period still runs.
- With `Error_attempts` `1`, or with attempts and period both blank, the step is not retried.
- The branch is followed once, after the last attempt. The work order view shows the attempts, for example ”Failed (5)”.

3.6.2 Timeouts

The element `Timeout` of a step limits one execution of the step: the time without a status update. For a watcher, one execution is one scan of the folder: the timeout fires only if the scan does not return, never because the file does not arrive. For the calls of a plugin, see Plugin timeouts.

Value of `Timeout`	Effect
blank	Timeout of the plugin, else the engine setting `default_step_timeout` (60 seconds by default).
`0`	No timeout.
positive	Timeout in seconds, restarted by each status update.
negative (Make Timeout Absolute in the designer)	Timeout in seconds, counted from the start of the step, whatever the status updates. A trigger without continuous monitoring then waits at most that time.

When the timeout fires, the step ends with the status set by `On_timeout` (On Timeout Action in the designer), `Failed` by default (see Step).

3.6.3 Processing code

Ruby code can be attached to a step, an input or an output. It runs inside Orchestrator: it has full access to the server.

Location	Runs	Variables
`Input/Processing`	When the input value is read.	`input_name` (read-only), `input_value` (set it to change the value).
`Step/Pre_processing`	Before the action.	`@inputs`: map of all input values, modifiable. `@work_order_id`, `@state_id` (work step id).
`Step/Post_processing`	After the action.	`outputs`: map of output values, modifiable. `@status`, `@status_details`: set them to change the step result. `@work_order_id`, `@state_id`.
`Output/Processing`	When the output value is stored.	`output_name` (read-only), `output_value` (set it to change the value).

If processing code raises an exception, a warning is logged and execution continues with the unmodified value, unless the server option `strict_prepost_processing` is set, in which case the step ends with `Error`.

3.6.4 Triggers

Some plugins wait for an event instead of executing at once, for example `LocalFileWatcher`. They do not hold a worker while waiting.

Without continuous monitoring, the step waits for its condition, fires once, and the workflow continues.

If the template enables continuous monitoring (Continue monitoring in the designer; for example attribute `allow_multiple` of `LocalFileWatcher`, or `keep_ongoing` of `Faspex5InboxWatcher`), the work order is cloned at the trigger step each time the step ends with a status other than `Error`:

- The work order that detected the event continues with the next steps, with the outputs of the trigger.
- The clone is a new work order that waits for the next event. Its `comments` are `Derived from WorkOrder <ID>, forked at '<STEP_NAME>' (<STEP_ID>)`, and its `derived_from` and `master_id` are the id of the first work order.

So the work order that waits is always the last one, and its id changes after each event. The work steps of the clones keep the group of the first work order, and form a work order group: with the default history scope `by workorder group`, all the clones share the history of past triggers (see History of past triggers). To stop the monitoring, cancel that work order: `ascli orchestrator workflows workorders <WORKFLOW_ID>` lists the work orders, the waiting one is `In Progress` on the trigger step. If a workflow monitor auto-starts the workflow (Monitors), turn the monitor off first: otherwise it starts a new work order at its next check. When the trigger step ends with `Error`, no clone is created, and the monitoring stops.

A trigger that returns a list (`return_all` of `LocalFileWatcher`, Return all matching files or return elements as a list in the designer) gives one work order all the elements detected in one scan. Otherwise, each element gets its own work order, started one after the other, about two polling periods apart.

After a restart of Orchestrator, watchers start again automatically, and running work orders continue from where they were. A synchronous step that the restart interrupted ends with `Error`: ”Recovery after partial execution is not supported”.

3.6.5 History of past triggers

A trigger remembers the elements it has already detected, so that it does not detect them again. The history is keyed by the element, for example the file path: a file with the same name but a new modification date is detected again.

The attribute `trigger_type` (Trigger Persistence Scope in the designer) sets who shares the history:

Scope	History shared by
`by workorder group` (default)	The work orders cloned from one start of the trigger. A new start (new work order, relaunch) has an empty history.
`by workflow`	All the work orders of the workflow. A restart does not detect again.
`by step`	One step.
`by action template` *(4.1.6)*	All the steps that use the same template.
`absolute`	All workflows.

Scope	History shared by
`none`	Nothing: the element is detected at each scan while it is present.

- Changing the scope erases the history: existing files are detected again.
- The history is stored on disk, or in the database with the server setting `persistence_mode: db`.
- A plugin can also decide when it keeps a history: see LocalFileWatcher.

3.7 Main action plugins

The Action Template Reference lists the attributes, inputs and outputs of all plugins. This section details the plugins most useful to write workflows.

3.7.1 CustomRuby

Runs Ruby code. Inputs and outputs are declared in the template.

Attribute	Content
`execute_code`	Ruby code of the action.
`mandatory_inputs`	Required inputs: type map, for example `{'person'=>'string'}`.
`optional_inputs`	Optional inputs: type map.
`typed_outputs`	Outputs: type map, for example `{'greeting'=>'string'}`.
`inputs_spec_code`	Instead of `mandatory_inputs` and `optional_inputs`: Ruby code returning a map (required inputs) or an array of two maps (required, optional).
`outputs_spec_code`	Instead of `typed_outputs`: Ruby code returning the output type map.
`validate_inputs_code`	Ruby code returning `true` if the inputs are valid.
`use_code_from_github`, `github_*`, `source_control_type`, `use_cached`, `verify_ssl`	Get the code from a GitHub or Bitbucket repository instead of `execute_code`.

Contract of `execute_code`:

- Input values are in the map `@inputs` (also `inputs`), for example `@inputs['person']`. An input can also be read as a method with its name, unless that name is also a method of the template: `name` returns the template name, not an input named `name`. Prefer `@inputs[...]`.
- Set outputs in the map `outputs` (or `@outputs`): `outputs['greeting'] = 'Hello'`. Only outputs declared in `typed_outputs` are stored.
- Optionally set `@status` to `Complete` (default), `Failed` or `Error`, and `@status_details` to a message. Any other status becomes `Error`. The message is also kept with `Complete`: it is the `step_status_details` of output `Step_information`.
- `return <STATUS>, <MESSAGE>, @outputs` ends the code at once, for example `return STATUS_FAILED, "not a .tar file", @outputs` (constants `STATUS_COMPLETE`, `STATUS_FAILED`, `STATUS_ERROR`). The code runs with `eval` inside the method of the plugin, so `return` leaves that method: the status is not checked, and without the third value the outputs are not stored.
- An exception ends the step with `Error`.
- Write to the Orchestrator log with `Rails.logger.info`. No method `debug` is defined: calling it raises an exception.
- `JSON` is loaded: `JSON.parse` and `JSON.generate` work without `require`.

Available in `execute_code` and in processing code (`Pre_processing`, `Post_processing`, `Input/Processing`, `Output/Processing`):

Available	Notes
Full Ruby stdlib	`require 'net/http'`, `require 'fileutils'`, etc.

Available	Notes
`File.nakedname(path)`	Orchestrator extension: basename without the last extension. `File.nakedname("/tmp/file.avi")` → `"file"`. `File.nakedname("/tmp/file.avi.old")` → `"file.avi"`.
`File.nakeddir(path)`	Orchestrator extension: immediate directory name. `File.nakeddir("/tmp/big/file.avi")` → `"big"`.
`File.extension(path)`	Orchestrator extension: last extension without dot. `File.extension("/tmp/file.avi")` → `"avi"`.
`XmlSimple.xml_in(xml)`	Requires `require 'xmlsimple'` at the top of the code block. The gem `xml-simple` is bundled with Orchestrator.
All gems in the Orchestrator `Gemfile`	`rest-client`, `nokogiri`, `net-ldap`, `rubyzip`, `uuid`, `redis`, etc. Use `require` as usual.

3.7.2 Filter

Evaluates Ruby code. The step ends with `Complete` if the result is true (any value other than `false` and `nil`), `Failed` otherwise, and `Error` if the code raises an exception. Output `FilterResult` (`flag`) holds the result.

Attribute	Content
`command`	Ruby code: an expression, or several lines, whose last value, or the value given to `return`, is the result. `@status_details` set in the code replaces the message of the step.
`mandatory_inputs`, `optional_inputs`	Additional inputs: type maps.
`filter_outputs`	Additional outputs: type map.

The code reads its inputs in two ways:

- `inputs['name']`, for an input declared in `mandatory_inputs` or `optional_inputs`: the value keeps its type, and needs no quoting. For example `!inputs['asset_list'].blank?`.
- Placeholders: each creates a required `string` input, unless declared. They are replaced by text before the code runs: quote a string value, as in `'<%= Status %>' == 'ok'`. A value that contains a quote breaks the code.

3.7.3 LocalFileWatcher

Waits for files matching a pattern in a directory of the Orchestrator host. Output `FileName` is the full path of the file (`string`), or the list of paths (`array`) if `return_all` is set; `FileContent` holds the file content if `read_file` is set.

Attribute	Content
`directory`	Directory to watch. Blank: becomes input `directory`.
`file_name`	File name pattern (glob, or regular expression if `use_regex_matching`). Blank: becomes input `File_name`.
`allow_multiple`	Continuous monitoring: keep watching after a detection (see Triggers).
`remove_file`	`1`: delete the file once detected (move it, with `archive_directory`). `0`: keep it, and remember it (see below).
`archive_directory`, `archive_with_timestamp`, `keep_timestamps`	Archive directory: the file is moved there with `remove_file` `1`, copied there otherwise. Output `FileName` is then the path in the archive.
`cool_off`	Seconds a file must keep the same size and modification date to be considered stable (default: `polling_frequency`).
`polling_frequency`	Seconds between scans (default 5).
`partial_file`	Trigger on files still being written: the step continues as soon as the file exists.
`return_all`	Return all matching files at once.

Attribute	Content
`trigger_type`	Scope of the history of past triggers: `by workorder group` (default, also when blank), `by workflow`, `by action template`, `by step`, `absolute`, `none`.
`exclusions`, `fullpath_exclusions`, `ignore_zero_bytes`, `ignore_readlocked`	Filters.

History of past triggers: the watcher remembers the files it has detected, with their modification time, only when `remove_file` is `0` and `trigger_type` is not `none`.

- `remove_file` `0`: a file is detected once per scope of `trigger_type`, and again when its modification time changes. With the default scope, the clones of a continuous monitoring share the history, and a new start (a new work order) detects again the files left in the directory.
- `remove_file` `1`: the file leaves the directory, no history is needed.
- `remove_file` blank (the database default; in plain format, also when written `false`): no history. A file left in the directory is detected again at each scan, by each new clone: with `allow_multiple`, a file that the processing does not remove starts a new processing every polling period.

Write `remove_file` explicitly: `1` to remove the file, `0` to keep it.

3.7.4 SimpleParameterLookup

Looks up a row in a table set in the template, and returns its values.

Attribute	Content
`parameters_associations`	The table: one row per line (LF or CR LF), columns separated by `:::`. The first line is the header: the names of the columns.
`param_file_name`	Instead of `parameters_associations`: path of a file on the Orchestrator host, with the same format, or CSV if its name ends with `.csv`.
`case_sensitive`	Compare values with case (default: ignore case).
`strip_spaces`	Remove spaces around values.
`disable_glob`, `disable_regex`	Do not match cells as patterns.
`return_array_of_rows`	Return all matching rows in output `rows`, instead of the first one.

Inputs and outputs come from the header:

- Each column name is an optional `string` input, and a `string` output.
- The inputs that have a value select the row: the first row whose cells, in those columns, match the input values. A cell matches if it is equal to the value, if it is a glob pattern that matches it (`File.fnmatch`), or if it is written `/<REGULAR_EXPRESSION>/` and matches it.
- The outputs are the cells of that row, for all columns.
- If no row matches, the step ends with `Failed`: `No configuration match for data set: <COLUMN>: <VALUE>`. With no input value (no key), no row matches.
- With `return_array_of_rows`, the step completes even if no row matches: output `rows` is then empty (and stays empty without a key).
- Input `ColumnToListValueFrom` (a column name) gives all the values of that column in output `ColumnValues` when the step completes: to list a column without a key, set `return_array_of_rows`.

Example: the step has input `Profile`, and outputs `FFMPEG Options` and `Target Extension` (plain format, rows separated by `\r\n` in a double-quoted value):

```
  SimpleParameterLookup__5: !ruby/object:SimpleParameterLookup
    attributes:
      name: W0__Transcoding profile
      parameters_associations: "Profile:::FFMPEG Options:::Target Extension\r\nMP4:::-vf
↪  scale=1280:720:::mp4\r\nXDCAM HD422:::-target pal-dvd -aspect 16:9:::avi"
```

3.7.5 Faspex5InboxWatcher

Waits for packages in a Faspex 5 mailbox. Each event is one package: the oldest one not seen yet.

Attribute	Content
`server`	URL of Faspex, for example `https://faspex.example.com/aspera/faspex`.
`user`, `client_id`, `private_key`	JWT authentication: the user whose mailbox is watched, the id of a Faspex API client with JWT enabled, and the RSA private key (PEM) whose public key is registered for that client. No client secret is used.
`mailbox`	`all` ("Global All", used when blank), `inbox` ("My Packages": packages received by the user), `inbox_all` ("All packages"), `shared_inbox` (with `shared_inbox_name`).
`keep_ongoing`	Continuous monitoring (see Triggers).
`new_only`	Ignore the packages already in the mailbox when the step starts.
`early_trigger`	`1`: trigger before the upload ends. `0`: trigger when the upload is complete and the package is released.
`polling_frequency`	Seconds between checks.
`get_transfer_spec`, `transfer_type`, `destination_root`	Output `Transfer_spec`: the transfer spec to download the package, for `connect` or `transfer_client`, with `destination_root` replaced by the attribute when it is set.

Outputs:

- `Id`: the package id, a number (as a `string`). `Package UUID`: its UUID.
- `File_list`: names of the files of the package, without path.
- `Transfer_spec`: JSON text from Faspex, with `direction` `receive`, `remote_host`, `remote_user`, `authentication` `token` and `token`, and one path: `paths[0].source` is the folder of the package on the Faspex storage, `<STORAGE>/<TITLE> - <UUID>.aspera-package/PKG - <TITLE>/`. The token is stored in clear in the outputs of the work order.

To download the package to a node, give `Transfer_spec` as payload to `AsperaNodeApiTransferOperation`.

3.7.6 AsperaNodeApiTransferOperation

Starts a transfer on a node with the Node API, then checks its status every `polling_frequency` seconds (default 5) until it ends.

- With operation `Submit Transfer Using Payload`, input `Payload` (attribute `payload` blank) is posted as is to `/ops/transfers` of the node: a transfer spec as JSON text.
- The node is `https://<SERVICE_NODE_IP>:<SERVICE_NODE_PORT>` with `use_ssl` `1` (default port 9092), `http://` and port 9091 with `use_ssl` `0`, or the address of `remote_node`. `service_node_ip` can include the port (`<HOST>:<PORT>`). The certificate of the node is not verified.
- Authentication is Basic, with `user_login` and `user_password`: a node user and its password, or an access key and its secret. They are required also with `remote_node`. With wrong credentials, the step ends with `Failed`: `Transfer failed: 401 Unauthorized`.
- `destination_root` of the transfer spec is a path in the docroot of the node user, or in the storage root of the access key.

3.7.7 WorkflowLauncher

Starts a workflow in a new, independent work order.

Attribute	Content
`workflow_id`	Id of the workflow to start (see Referring to existing entities). Each runtime parameter of that workflow is an input of the step, with the same name, required unless the parameter is optional. Blank: input `Workflow_ID` (or the portable id, with `use_portable_id`), and input `Workflow_Parameters`, a hash of runtime parameters.

Attribute	Content
`wait_for_completion`	`1`: the step waits for the end of the launched work order. It polls: no worker is held.
`fail_if_failure`	`1`: with `wait_for_completion`, the step ends with `Failed` when the launched work order is `Failed`.
`work_order_name`, `master_id`	Label of the launched work order, and its master id, which groups work orders in the work order view. Blank: optional inputs `WorkOrder_Description` and `Master_id`.

Outputs: `WorkOrder_ID` (`int`), the id of the launched work order, and, when waiting, `WorkOrder_Status` (`string`), its status.

Status of the step:

`wait_for_completion`	Launched work order	Step
blank or `0`	Started	`Complete`
any	Could not be started	`Error`
`1`	`Complete`	`Complete`
`1`	`Failed`	`Failed` with `fail_if_failure` `1`, else `Complete`
`1`	`Error`, `Canceled`, rolled back, deleted	`Failed`, whatever `fail_if_failure`

3.7.8 ArrayFanout and Funnelin

`ArrayFanout` runs the next step once per element of an array; `Funnelin` waits for all those executions and gathers their results.

- `ArrayFanout`: attribute `fanout_variable` is the name of the input (`array`), `fanned_as` the name of the output holding the current element, `variable_type` its type, `serialize` to run sequentially. Output `Fanout_Size` is the number of elements.
- `Funnelin`: attribute `funnel_variable` (and `funnel_type`) is the name of the input collected from each execution, `funneled_inputs` additional inputs (type map), `return_status` to add status outputs, `fail_if_failures` to fail if an execution failed. Output `Hash_by_state_id` maps each work step id to its value; each additional input `x` gives an output `x_hash`.

Exactly one step can be between them, and `Funnelin` must be linked to each end status of that step: see Recipe: one work order per file.

3.8 Secrets

Orchestrator has no secret store for workflows. A secret (password, API key, token, passphrase) reaches a step from a template attribute, from an input mapped to a value or to a parameter, or from an entity of the server, such as a remote node. These ways differ in where the value is stored in clear, and in who can read it. With the plugin `SecretReference`, a workflow holds a reference to a secret of an external store instead of the secret, see Secret references. The rules that follow from this are in Using secrets.

3.8.1 Where a secret is stored

Source of the secret	Storage on the server	In an export (`export_workflow`, export in the web UI)
Template attribute, for example with widget `password` in plugins.yml	Clear, in the template.	Clear.
`Map_to` of type `value`	Clear, in the graph XML of each revision.	Clear.

Source of the secret	Storage on the server	In an export (`export_workflow`, export in the web UI)
`Value` of a parameter of type `pwd`	Clear, in the graph XML of each revision. Encrypted in the published workflow.	Clear.
Runtime parameter of type `pwd`, given when starting the workflow	Encrypted, in the variables of the work order.	Not exported.
Output of type `pwd`	Encrypted, in the variables of the work order.	Not exported.
Remote node, referred to by name (see Referring to existing entities)	Encrypted, in the remote node.	The name only. A `.wkf` package contains the node, with its password encrypted with the key of the exporting server.
Secret reference `secret://...`, in any of the above	The reference only. The secret is in its store: HashiCorp Vault, an encrypted file, or a remote node.	The reference only.

Encrypted values are prefixed with `~p:`: AES-256-GCM, with a key derived from the `secret_key_base` of the server (`OrchCipher`). The designer hides the value of a `pwd` parameter, but sends it to the browser: any user who can open the workflow in the designer, or export it, can read it.

Push to Git (Orchestrator 4.1.7 and later): option Protect Passwords on Push of the Git settings replaces, in the pushed file, the `Value` of `pwd` parameters and the `Map_to` values of inputs of type `pwd`. The replacement is the value encrypted with the export token of the Git settings (prefix `~gx:`), or an empty string when no token is set. An import, of any kind, on a server with the same export token decrypts them. Template attributes are pushed in clear, and `export_workflow` does not use this option.

3.8.2 Where a secret is displayed

The work step page of the web UI masks:

- Inputs and outputs of type `pwd`. The type of an input is the one declared by the plugin, not the type of the parameter mapped to it. In `CustomRuby`, the author of the step declares this type, and a `pwd` input accepts a `string` value.
- Inputs, outputs and carry-throughs whose name contains `password` (any case), when the server option `mask_password_variables` is set (the default). Orchestrator 3.x and 4.0 also had the option `password_field_definition_regex`, which added name patterns (`pwd`, `secret`, `key`); 4.1.6 no longer has it.

Other values are displayed in clear, even when they come from a `pwd` parameter. For example, inputs `Aws_secret` (Amazon plugins), `Files_client_secret`, `Api_token` and `Apikey` are of type `string`: check the type and the name of an input in plugins.yml.

The API does not mask: it returns the decrypted values to the users who can view the workflow.

Endpoint	`ascli` command	Values
`work_step_status`	`ascli orchestrator workstep status <WORK_STEP_ID>`	Inputs, outputs and carry-throughs of a work step.
`work_order_output`	`ascli orchestrator workorders output <WORK_ORDER_ID>`	Outputs of a work order.
`workflow_inputs_spec`	`ascli orchestrator workflows inputs <WORKFLOW_ID>`	`Value` of the optional runtime parameters.

Logs:

- The request log of Orchestrator writes `[FILTERED]` instead of the value of a request parameter whose name contains `passw`, `secret`, `token`, `_key`, `crypt`, `salt`, `certificate`, `login`, `email`, `otp` or `ssn` (`config/initializers/filter_parameter_logging.rb`). This applies to the runtime parameters in `external_parameters`.
- The access log of the web server (nginx) records the URL, with its query string.

3.8.3 Secret references

The plugin `SecretReference` (repository `aspera-orchestrator-secret-reference`, for Orchestrator 4.1.6) lets a workflow keep a reference instead of a secret:

```
secret://<STORE>/<PATH>[?<OPTIONS>][#<FIELD>]
```

- A reference is the whole value of a Password parameter, a step input or a template attribute. In a text, a placeholder such as `<%= Db_password %>` adds the input `Db_password` to the step: with a reference as its value, the placeholder is replaced by the secret.
- When a step runs, the plugin reads the secret from its store: the step gets the value, and variables, outputs and saved states keep the reference. A secret rotated in the store is used by the next run of a step.
- Stores are named in a configuration file on each server. Types: `vault` (HashiCorp Vault KV v2), `file` (encrypted file made by `ascli`), `node` (`login`, `password` or `certificate_passphrase` of a remote node).
- The step Secret reference checks that a secret can be read, and gives its reference (output `Reference`) and its version, never its value.

Installation, configuration and the dashboard are described in the README of the repository.

3.8.4 Secret given at run time

`DatabaseQuery`, with attribute `database_password` left blank, has a required input `DB_password` of type `pwd`. Map it to a required runtime parameter:

```
<Start x="100" y="50" id="start"><Parameters><Parameter id="p_db_password"/></Parameters></Start>
...
<Inputs><Input name="DB_password"><Map_to type="parameter" name="db_password"/></Input></Inputs>
...
<Parameters>
  <Parameter x="100" y="200" id="p_db_password">
    <Name>db_password</Name><Value></Value><Value_type>pwd</Value_type>
    <Runtime_override>true</Runtime_override><Runtime_optional>false</Runtime_optional>
  </Parameter>
</Parameters>
```

Start it with the parameters read from a file that only its owner can read (`chmod 600`), containing `{"db_password": "<PASSWORD>"}`:

```
ascli orchestrator workflows start <WORKFLOW_ID> @json:@file:<PARAMS_FILE>
```

3.9 REST API

Base URL: `https://<HOST>/aspera/orchestrator/api/`. The response format is chosen with query parameter `format` (`xml`, the default, or `json`).

Authentication depends on the option Use Secure JWT API Auth (`use_secure_jwt_api_auth`, set by default):

Option	Authentication
Set	Header `Authorization: Bearer <TOKEN>`. `POST api/login`, with `username` and either `password` or `api_key` (the API key of the user), returns the token in `token`. API JWT Token Expiry (`api_jwt_token_expiry_seconds`) sets its lifetime, 24 hours by default.
Not set	HTTP Basic, or query parameters `login` with `password` or `api_key`. `POST api/login` answers with status 403.

The pages of the web interface, such as a direct start page, do not read these query parameters: with the option Inline Auth Allowed (`inline_auth_allowed`, not set by default), they accept HTTP Basic.

Routes: each endpoint below has a route with the given method. In addition, any endpoint can be called as `api/<ENDPOINT>/<ID>`, with any HTTP method, where `<ID>` is the main identifier (workflow or work order). Some endpoints have no other route (for example `export_workflow`, `list_monitors`, `journal_files`, `pool_status`): when they do not use `<ID>`, any value works, for example `0`. The OpenAPI description lists all endpoints and their parameters. Swagger API,

in the help pages of the web interface (`https://<HOST>/aspera/orchestrator/api-docs`), shows the description delivered with Orchestrator, and can try calls.

Errors are returned with the exception message and stack trace in the response body.

3.9.1 import_workflow

`POST api/import_workflow`, body `multipart/form-data`:

Field	Required	Content
`import_file`	yes	The workflow file (file part).
`import_file_name`	yes	File name, ending with `yml` or `wkf`. The upload is stored under this name in `<RUN_DIR>/workflows/import/` (see Server folders).
`folder_id`	no	Folder of the new workflow.
`link_to_subworkflows`	no	`true`: in a `.wkf` package, use the sub-workflows already imported from the same files instead of importing them again. See Referring to existing entities.
`publish_workflow`	no	`true` or `1`: publish after import. The server option `publish_api_imported_workflow` sets the default.

Response: the new workflow as JSON (`{"workflow": {"id": ..., "name": ..., ...}}`), in both formats. Other responses with status 200:

- `{"plugins": [...], "missing_deps": [...]}`: plugins that could not be enabled; nothing is imported.

Orchestrator also has a response `{"dependencies": ..., "file": ..., "workflow": ...}` for dependencies that are not packed, but its condition is never met (see Known issues).

On error: status 500 with `{"error": ..., "message": ..., "details": ...}`.

3.9.2 export_workflow

`GET api/export_workflow/<ID_OR_PORTABLE_ID>` (no route without the id in the path)

Returns the workflow file (`.yml`, Rails format). With parameter `export_with_dependencies`, returns a `.wkf` package with sub-workflows and remote nodes. Any non-empty value of `export_with_dependencies`, including `false`, enables it.

3.9.3 publish_workflow

`POST api/publish_workflow?id=<ID_OR_PORTABLE_ID>`, or `api/publish_workflow/<ID_OR_PORTABLE_ID>` with any method. The id can also be given in a JSON body `{"id": ...}`.

Publishes the last whiteboard revision. Response: `true` or `false` (JSON), or `<WorkflowPublish><Success>true</Success></WorkflowPublish>` (XML). `false` means the whiteboard has no `error_free` value.

3.9.4 find_constraints

`GET api/find_constraints?file=<PATH>[&wf_id=<WORKFLOW_ID>]`

Analyzes a workflow file present on the Orchestrator host and returns the list expected by `import_with_constraints`, with the possible choices for each conflict:

```
[{"filename": "<PATH>"}, {"add as revision": null}, {"subwf constraints": {}},
 {"action template constraints": {}}, {"remote node constraints": {}},
 {"missing plugins": null, "Auto-enable missing plugins?": null}]
```

It does not check that the file exists: a wrong path returns the same empty lists.

3.9.5 import_with_constraints

`POST api/import_with_constraints`, JSON body: an array of six objects, in this order:

```
[{"filename": "/opt/aspera/orchestrator/var/run/orchestrator/workflows/import/my_workflow.yml"},
 {"add as revision": 239},
 {"subwf constraints": {}},
 {"action template constraints": {"Search Files": "Map to the existing Global Template"}},
 {"remote node constraints": {"Baton": "Map to the existing Remote Node"}},
 {"Auto-enable missing plugins?": "true"}]
```

Item	Content
`filename`	Path of the file on the Orchestrator host.
`add as revision`	Id of an existing workflow to add a revision to, or `null` to create a new workflow.
`subwf constraints`	Sub-workflow name to choice: `Map to the Existing Sub-Workflow`, `Create a new Sub-Workflow with a unique name`, `Add a new revision to the existing Sub-Workflow`.
`action template constraints`	Global template name to choice: `Map to the existing Global Template`, `Create a new Global Template with a different name`, `Override the existing Global Template with this new template`.
`remote node constraints`	Remote node name to choice: `Map to the existing Remote Node`, `Create a new Remote Node with a different name`, `Override the Existing Remote Node with this importing node`.
`Auto-enable missing plugins?`	`true` or `false`.

Response: the workflow as JSON. The workflow is not published.

3.9.6 initiate

`POST api/initiate?format=json`, JSON body `{"workflow_id": <ID>, "external_parameters": {"<NAME>": <VALUE>, ...}}`. Query parameters:

Parameter	Content
`synchronous`	`true`: wait for the end of the work order.
`timeout`	With `synchronous`: maximum wait, in seconds.
`explicit_output_step`, `explicit_output_variable`	With `synchronous`: return only this output.
`explicit_output`	Same, as `<STEP_NAME>:<OUTPUT_NAME>`.
`on_error_return_code`, `on_failed_return_code`	HTTP status to return when the work order ends `Error` or `Failed`.
`tags`	Comma-separated tags of the work order.

Give the value of an `array` or `hash` parameter as a string, in JSON: `{"files": "[\"/a.mxf\", \"/b.mxf\"]"}`. A JSON array as value fails with status 500 (`undefined method 'gsub' for an instance of Array`), observed on 4.1.6.

3.9.7 Other workflow endpoints

Endpoint	Content
`GET api/workflows_list`	All workflows: id, name, portable id, published and latest revision.

Endpoint	Content
`GET api/workflow_inputs_spec/<ID>`	Runtime parameters: name, type, optional, default value.
`GET api/workflow_outputs_spec/<ID>`	Outputs: `<STEP_NAME>:<OUTPUT_NAME>`, type.
`GET api/work_orders_list/<WORKFLOW_ID>`	Work orders of a workflow, or of all workflows with `all`. Filters: `status`, `priority`, `from_date`, `to_date`, `tag`, `max_results`.
`GET api/work_order_status/<ID>`	Status of a work order and of its work steps. For a sub-workflow, only its status, not its steps.
`GET api/work_order_output/<ID>`	Output values of a work order (XML: one `variable` element per output).
`GET api/work_order_cancel/<ID>`	Cancel a work order.
`GET api/work_order_reset/<WORK_ORDER_ID>`	Reset a work order.
`GET api/work_step_status/<WORK_STEP_ID>`	Status, inputs and outputs of a work step. Parameters such as `set_status` change its status.
`GET api/resource_online/0?pool_name=<POOL_NAME>&resource_name=<RESOURCE_NAME>`	Take a resource of a pool online. `api/resource_offline` takes the same parameters.

3.9.8 ascli commands

Operation	Command
Check a file, with no server	`ascli orchestrator workflows check_import <FILE>`
Import	`ascli orchestrator workflows import <FILE>`; with `@json:'{"publish":true}'` after the file, it also publishes
Find the constraints of a file on the server	`ascli orchestrator workflows find_constraints <SERVER_PATH> [<ID>]`, before `import_with_constraints`
Import with constraints, or as a revision	`ascli orchestrator workflows import_with_constraints @json:'{"filename":"<SERVER_PATH>","add_as_revision":<ID>}'`
Export	`ascli orchestrator workflows export <ID> --out.file=<FILE>`
Export with dependencies (`.wkf`)	`ascli orchestrator workflows export <ID> @json:'{"dependencies":true}' --to-folder=<FOLDER>`
Publish	`ascli orchestrator workflows publish <ID>`
Inputs, outputs	`ascli orchestrator workflows inputs <ID>`, `ascli orchestrator workflows outputs <ID>`
Start	`ascli orchestrator workflows start <ID> [<PARAMETERS>] [<EXECUTION>]`, where execution is `{"synchronous":true}` or `{"step":"<STEP_NAME>","variable":"<OUTPUT_NAME>"}`
Work orders of a workflow	`ascli orchestrator workflows workorders <ID>`
Work step	`ascli orchestrator workstep status <WORK_STEP_ID>`: status, inputs and outputs
Work order	`ascli orchestrator workorders status <ID>`, `ascli orchestrator workorders output <ID>`, `ascli orchestrator workorders cancel <ID>`
Journal, monitors, queues, resource pools	`ascli orchestrator journal files <BOOK>`, `ascli orchestrator monitors list <TYPE>`, `ascli orchestrator queues list`, `ascli orchestrator pools status <NAME>`

Operation	Command
Specification of a plugin, with no server	`ascli orchestrator plugins spec [<PLUGIN_CLASS>]`, then `attributes`, `inputs` or `outputs`
Read this guide, with no server (`ascli` 4.29 or later)	`ascli orchestrator workflows development guide toc` lists the sections and their anchors, `ascli orchestrator workflows development guide <ANCHOR>` shows one
Query parameters of an API call	`--query=@json:'{...}'`; `--query=help` lists them, from the OpenAPI description

3.10 Inline validation

An Aspera transfer server calls a workflow for each file it receives, at start, after a number of bytes (threshold) and at end, and rejects the file when the work order does not end with `Complete`. A server does not call for the files it sends, or when a transfer falls back to HTTP. For when to use it, see Using inline validation.

4.1.5 and 4.1.6 refuse the call: see Known issues.

3.10.1 Validation settings

In the `aspera.conf` of the server:

Setting	Content
`validation_file_start`, `validation_threshold`, `validation_file_stop`	`uri` to call at this event. Default: `none`.
`validation_uri`	The URL of the call.
`validation_threshold_kb`	The threshold, in KB. Required by `validation_threshold`.
`validation_threads`	Calls in parallel, 5 by default.
`validation_secure`	`true` checks the certificate of Orchestrator. Not checked by default.
`session_timeout_sec`	Time limit of a call, 60 seconds by default.

The session fails at start with `Validator initialization error` when an event is set to `uri` without `validation_uri`, when `validation_uri` is set with no event set to `uri`, or when `validation_threshold` is set without `validation_threshold_kb`.

3.10.2 Validation call

`POST https://<ORCHESTRATOR_HOST>/aspera/orchestrator/external_calls/validate?id=<WORKFLOW_ID>`, once per file and per event. The user needs the run permission on the workflow.

`ascp` adds no authentication header of its own, so it cannot give a token: the call works only when Use Secure JWT API Auth is not set (see REST API). Give the credentials in `validation_uri`: `ascp` sends `https://<USER>:<PASSWORD>@<ORCHESTRATOR_HOST>/...` as HTTP Basic.

The work order gets two runtime parameters, which the workflow declares:

Parameter	Content
`File`	The request of `ascp`, a hash. `startstop` is `start`, `running` at the threshold, or `stop`. `file` is the path of the file. Other keys include `size`, `start_byte`, `user`, `user_id`, `host`, `direction`, `session_id`, `xfer_id`, `cookie` and `tags`.
`File_path`	The path of the file, same as `file`.

Test the event with a `Filter`: `inputs['File']['startstop'] == 'start'`.

IFV Skip Start Event (Orchestrator configuration, `ifv_skip_start_event`, not set by default) answers a start event without starting a work order.

3.10.3 Validation answer

Orchestrator answers when the work order ends, and checks its status every second: the request stays open until then.

Work order	HTTP status	File
`Complete`	200	Accepted.
`Failed`, `Error`	400	Rejected.
Other final status, such as `Canceled`	500	Rejected.

The reason shown to the user is the status message of the work order, set with `ExitStatus`.

`ascp` takes any answer other than HTTP 200 as a rejection, such as a redirection or a refused authentication. So does a call with no answer after `session_timeout_sec`, and the work order then goes on.

3.10.4 Validation and the transfer

Event	Effect on the transfer
Start	The file does not start before the answer.
Threshold	The call comes once `validation_threshold_kb` of the file are written; a smaller file gets no call. The transfer does not pause: a rejection stops it when the answer arrives. If the last block is written by then, the file stays complete, and the user still gets the error.
End	The file does not end before the answer.

The other files of the transfer go on during a call. A rejection ends the whole transfer session, not only the file: the files not yet received are not transferred. `ascp` does not delete a rejected file: after a rejection at the end, the complete file stays under its final name. With a partial file suffix (`partial_file_suffix`), the calls give the final name, but during the transfer the file is on disk with the suffix.

3.11 Recipes

The following workflows were imported, published and run on Orchestrator 4.1.6.

3.11.1 Recipe: minimal workflow

See Quick start.

3.11.2 Recipe: runtime parameter and step chaining

Step `Greet` receives the runtime parameter `who`; step `Shout` receives the output of `Greet`, with input processing.

```
---
- !ruby/object:Workflow
  attributes:
    name: greet
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters><Parameter id="p_who"/></Parameters></Start>
      <Error x="900" y="350"
↪   id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
```

```
      <End x="900" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="shout" status="Complete"/></Prerequisites></End>
      <Fail x="900" y="200"
↪  id="fail"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50"
↪  id="greet"><Action_id>1</Action_id><Step_name>Greet</Step_name><Step_type>CustomRuby</Step_type><Synch_f
        <Prerequisites><Prerequisite id="start" status="true"/></Prerequisites>
        <Parameters></Parameters>
        <Inputs><Input name="person"><Map_to type="parameter" name="who"/></Input></Inputs>
        <Outputs></Outputs></Step>
      <Step x="600" y="50"
↪  id="shout"><Action_id>2</Action_id><Step_name>Shout</Step_name><Step_type>CustomRuby</Step_type><Synch_f
        <Prerequisites><Prerequisite id="greet" status="Complete"/></Prerequisites>
        <Parameters></Parameters>
        <Inputs><Input name="text"><Map_to type="output" name="greeting" step_type="CustomRuby"
↪  action_id="1" step_name="Greet"/><Processing>input_value = input_value +
↪  '!'</Processing></Input></Inputs>
        <Outputs></Outputs></Step>
      </Steps>
      <Parameters><Parameter x="100" y="200"
↪  id="p_who"><Name>who</Name><Value>world</Value><Value_type>string</Value_type><Runtime_override>true</Ru
      <Notes></Notes>
      </Workflow>
- CustomRuby__1: !ruby/object:CustomRuby
    attributes:
      name: W0__Greet
      mandatory_inputs: "{'person'=>'string'}"
      execute_code: "outputs['greeting'] = \"Hello #{@inputs['person']}\""
      typed_outputs: "{'greeting'=>'string'}"
  CustomRuby__2: !ruby/object:CustomRuby
    attributes:
      name: W0__Shout
      mandatory_inputs: "{'text'=>'string'}"
      execute_code: "outputs['result'] = @inputs['text'].upcase"
      typed_outputs: "{'result'=>'string'}"
- CustomRuby__1: []
  CustomRuby__2: []
- {}
- CustomRuby: 0.7.0
```

```
ascli orchestrator workflows start <ID> @json:'{"who":"Laurent"}'
↪  @json:'{"step":"Shout","variable":"result"}'   # HELLO LAURENT!
ascli orchestrator workflows start <ID> @json:'{}' @json:'{"step":"Shout","variable":"result"}'
↪  # HELLO WORLD!
```

3.11.3 Recipe: branch on a status

Step `Check` ends with `Failed` when the runtime parameter `value` is empty; one step is connected to each status; `End` waits for any of them (`Synch_factor` 1).

```
---
- !ruby/object:Workflow
  attributes:
    name: branch
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters><Parameter id="p_value"/></Parameters></Start>
      <Error x="1000" y="350"
↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
```

```
      <End x="1000" y="50" id="end"><Synch_factor x="920"
↪  y="70">1</Synch_factor><Prerequisites><Prerequisite id="on_ok" status="Complete"/><Prerequisite
↪  id="on_failed" status="Complete"/></Prerequisites></End>
      <Fail x="1000" y="200"
↪  id="fail"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50"
↪  id="check"><Action_id>1</Action_id><Step_name>Check</Step_name><Step_type>CustomRuby</Step_type><Synch_f
        <Prerequisites><Prerequisite id="start"
↪  status="true"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="value"><Map_to type="parameter"
↪  name="value"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="600" y="0" id="on_ok"><Action_id>2</Action_id><Step_name>On
↪  OK</Step_name><Step_type>CustomRuby</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="check"
↪  status="Complete"/></Prerequisites><Parameters></Parameters><Inputs></Inputs><Outputs></Outputs></Step>
      <Step x="600" y="150" id="on_failed"><Action_id>3</Action_id><Step_name>On
↪  Failed</Step_name><Step_type>CustomRuby</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="check"
↪  status="Failed"/></Prerequisites><Parameters></Parameters><Inputs></Inputs><Outputs></Outputs></Step>
      </Steps>
      <Parameters><Parameter x="100" y="200"
↪  id="p_value"><Name>value</Name><Value></Value><Value_type>string</Value_type><Runtime_override>true</Run
      <Notes></Notes>
      </Workflow>
- CustomRuby__1: !ruby/object:CustomRuby
    attributes:
      name: W0__Check
      optional_inputs: "{'value'=>'string'}"
      execute_code: "@status = @inputs['value'].to_s.empty? ? 'Failed' : 'Complete'"
  CustomRuby__2: !ruby/object:CustomRuby
    attributes:
      name: W0__On OK
      execute_code: "outputs['result'] = 'value was provided'"
      typed_outputs: "{'result'=>'string'}"
  CustomRuby__3: !ruby/object:CustomRuby
    attributes:
      name: W0__On Failed
      execute_code: "outputs['result'] = 'value was empty'"
      typed_outputs: "{'result'=>'string'}"
- CustomRuby__1: []
  CustomRuby__2: []
  CustomRuby__3: []
- {}
- CustomRuby: 0.7.0
```

With `{"value":"x"}`, only `On OK` runs; with `{}`, only `On Failed` runs. Both work orders end `Complete`.

3.11.4 Recipe: wait for a file

The workflow waits for a file matching `/tmp/ascli_watch_*.txt` on the Orchestrator host, deletes it, and returns its path.

```
---
- !ruby/object:Workflow
  attributes:
    name: wait_for_file
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters></Parameters></Start>
```

```
      <Error x="900" y="350"
↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="900" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="wait" status="Complete"/></Prerequisites></End>
      <Fail x="900" y="200"
↪  id="fail"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Fail>
      <Steps>
      <Step x="400" y="50" id="wait"><Action_id>1</Action_id><Step_name>Wait for
↪  file</Step_name><Step_type>LocalFileWatcher</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="start"
↪  status="true"/></Prerequisites><Parameters></Parameters><Inputs></Inputs><Outputs></Outputs></Step>
      </Steps>
      <Parameters></Parameters><Notes></Notes>
      </Workflow>
- LocalFileWatcher__1: !ruby/object:LocalFileWatcher
    attributes:
      name: W0__Wait for file
      directory: /tmp/
      file_name: ascli_watch_*.txt
      allow_multiple: 0
      remove_file: 1
      cool_off: 2
- LocalFileWatcher__1: []
- {}
- LocalFileWatcher: 1.9.3
```

```
ascli orchestrator workflows start <ID> @json:'{}' @json:'{"step":"Wait for
↪  file","variable":"FileName"}'
```

The command returns when a matching file has been stable for `cool_off` seconds, for example `/tmp/ascli_watch_20261006_230726.txt`.

3.11.5 Recipe: sub-workflow with outputs

Workflow `child` upper-cases its runtime parameter `text`: step `Upper`, output `result`. Workflow `parent` runs it in step `Call child` (`SubWorkflow`), and gets `result` of `Upper` as output `upper` of the step.

Import and publish `child` first, and write its id in `workflow_id` of the `SubWorkflow` template (see Referring to existing entities). The inputs and outputs of the step come from the published `child`:

- One input per runtime parameter of `child`, with the same name: here `text`, required because `Runtime_optional` is `false` in `child`.
- One output per entry of `workflow_outputs`, `{'<OUTPUT_NAME>'=>'<STEP_NAME>:<CHILD_OUTPUT_NAME>'}`, with the type of that output in `child`.

```
---
- !ruby/object:Workflow
  attributes:
    name: child
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters><Parameter id="p_text"/></Parameters></Start>
      <Error x="600" y="350"
↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="600" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="upper" status="Complete"/></Prerequisites></End>
      <Fail x="600" y="200"
↪  id="fail"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50"
↪  id="upper"><Action_id>1</Action_id><Step_name>Upper</Step_name><Step_type>CustomRuby</Step_type><Synch_f
```

```
      <Prerequisites><Prerequisite id="start"
↪  status="true"/></Prerequisites><Parameters></Parameters>
      <Inputs><Input name="text"><Map_to type="parameter"
↪  name="text"/></Input></Inputs><Outputs></Outputs></Step>
    </Steps>
    <Parameters><Parameter x="100" y="200"
↪  id="p_text"><Name>text</Name><Value></Value><Value_type>string</Value_type><Runtime_override>true</Runti
    <Notes></Notes>
    </Workflow>
- CustomRuby__1: !ruby/object:CustomRuby
  attributes:
    name: W0__Upper
    mandatory_inputs: "{'text'=>'string'}"
    execute_code: "outputs['result'] = @inputs['text'].upcase"
    typed_outputs: "{'result'=>'string'}"
- CustomRuby__1: []
- {}
- CustomRuby: 0.7.0
```

```
---
- !ruby/object:Workflow
  attributes:
    name: parent
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters><Parameter id="p_text"/></Parameters></Start>
      <Error x="900" y="350"
↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="900" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="use" status="Complete"/></Prerequisites></End>
      <Fail x="900" y="200" id="fail"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="call" status="Failed"/></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50" id="call"><Action_id>1</Action_id><Step_name>Call
↪  child</Step_name><Step_type>SubWorkflow</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="start"
↪  status="true"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="text"><Map_to type="parameter"
↪  name="text"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="600" y="50" id="use"><Action_id>2</Action_id><Step_name>Use
↪  result</Step_name><Step_type>CustomRuby</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="call"
↪  status="Complete"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="value"><Map_to type="output" name="upper" step_type="SubWorkflow"
↪  action_id="1" step_name="Call child"/></Input></Inputs><Outputs></Outputs></Step>
      </Steps>
      <Parameters><Parameter x="100" y="200"
↪  id="p_text"><Name>text</Name><Value>hello</Value><Value_type>string</Value_type><Runtime_override>true</
      <Notes></Notes>
      </Workflow>
- SubWorkflow__1: !ruby/object:SubWorkflow
  attributes:
    name: W0__Call child
    workflow_id: <CHILD_ID>
    workflow_outputs: "{'upper'=>'Upper:result'}"
  CustomRuby__2: !ruby/object:CustomRuby
  attributes:
    name: W0__Use result
    mandatory_inputs: "{'value'=>'string'}"
    execute_code: "outputs['result'] = \"child returned #{@inputs['value']}\""
    typed_outputs: "{'result'=>'string'}"
- SubWorkflow__1: []
```

```
  CustomRuby__2: []
- {}
- SubWorkflow: 1.3.1
  CustomRuby: 0.7.0
```

```
ascli orchestrator workflows import child.yml @json:'{"publish":true}'
ascli orchestrator workflows import parent.yml @json:'{"publish":true}'
ascli orchestrator workflows start <PARENT_ID> @json:'{"text":"abc"}' @json:'{"step":"Use
↪  result","variable":"result"}'   # child returned ABC
```

`child` runs in a work order of its own. The import of `parent` sets `workflow_portable_id` of the template to the portable id of `child`.

3.11.6 Recipe: one work order per file

Workflow `watch_folder` watches the folder `/tmp/doc_test_watch/` of the Orchestrator host, and starts workflow `per_file` once per file found:

- `Detect files` (`LocalFileWatcher`): continuous monitoring (`allow_multiple`, see Triggers), all files found at once (`return_all`): output `FileName` is an array. The files are left in the folder and remembered (`remove_file` `0`): `per_file` deletes them.
- `Each file` (`ArrayFanout`): runs the next step once per element of input `all_files`, with the element as output `file`.
- `Process file` (`WorkflowLauncher`): starts `per_file` with `file_path` set to `file`, waits for its end (`wait_for_completion`), and ends with `Failed` if it fails (`fail_if_failure`).
- `Wait all` (`Funnelin`): runs once all executions of `Process file` have ended, and gathers their values.

`per_file` reads the size of the file and deletes it.

```
---
- !ruby/object:Workflow
  attributes:
    name: per_file
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters><Parameter id="p_file_path"/></Parameters></Start>
      <Error x="600" y="350"
↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="600" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="process" status="Complete"/></Prerequisites></End>
      <Fail x="600" y="200"
↪  id="fail"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50" id="process"><Action_id>1</Action_id><Step_name>Process
↪  file</Step_name><Step_type>CustomRuby</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="start"
↪  status="true"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="file_path"><Map_to type="parameter"
↪  name="file_path"/></Input></Inputs><Outputs></Outputs></Step>
      </Steps>
      <Parameters><Parameter x="100" y="200"
↪  id="p_file_path"><Name>file_path</Name><Value></Value><Value_type>string</Value_type><Runtime_override>t
      <Notes></Notes>
      </Workflow>
- CustomRuby__1: !ruby/object:CustomRuby
    attributes:
      name: W0__Process file
      mandatory_inputs: "{'file_path'=>'string'}"
      execute_code: "outputs['size'] = File.size(@inputs['file_path']);
↪  File.delete(@inputs['file_path'])"
```

```
      typed_outputs: "{'size'=>'int'}"
- CustomRuby__1: []
- {}
- CustomRuby: 0.7.3
```

```
---
- !ruby/object:Workflow
  attributes:
    name: watch_folder
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters></Parameters></Start>
      <Error x="1200" y="350"
 ↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="1200" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
 ↪  id="wait" status="Complete"/></Prerequisites></End>
      <Fail x="1200" y="200" id="fail"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
 ↪  id="wait" status="Failed"/></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50" id="detect"><Action_id>1</Action_id><Step_name>Detect
 ↪  files</Step_name><Step_type>LocalFileWatcher</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="start"
 ↪  status="true"/></Prerequisites><Parameters></Parameters><Inputs></Inputs><Outputs></Outputs></Step>
      <Step x="525" y="50" id="each"><Action_id>2</Action_id><Step_name>Each
 ↪  file</Step_name><Step_type>ArrayFanout</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="detect"
 ↪  status="Complete"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="all_files"><Map_to type="output" name="FileName"
 ↪  step_type="LocalFileWatcher" action_id="1" step_name="Detect
 ↪  files"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="750" y="50" id="launch"><Action_id>3</Action_id><Step_name>Process
 ↪  file</Step_name><Step_type>WorkflowLauncher</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="each"
 ↪  status="Complete"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="file_path"><Map_to type="output" name="file" step_type="ArrayFanout"
 ↪  action_id="2" step_name="Each file"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="975" y="50" id="wait"><Action_id>4</Action_id><Step_name>Wait
 ↪  all</Step_name><Step_type>Funnelin</Step_type><Synch_factor x="895" y="70">1</Synch_factor>
        <Prerequisites><Prerequisite id="launch" status="Complete"/><Prerequisite id="launch"
 ↪  status="Failed"/><Prerequisite id="launch"
 ↪  status="Error"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="file"><Map_to type="output" name="file" step_type="ArrayFanout"
 ↪  action_id="2" step_name="Each file"/></Input>
        <Input name="WorkOrder_ID"><Map_to type="output" name="WorkOrder_ID"
 ↪  step_type="WorkflowLauncher" action_id="3" step_name="Process
 ↪  file"/></Input></Inputs><Outputs></Outputs></Step>
      </Steps>
      <Parameters></Parameters><Notes></Notes>
      </Workflow>
- LocalFileWatcher__1: !ruby/object:LocalFileWatcher
    attributes:
      name: W0__Detect files
      directory: /tmp/doc_test_watch/
      file_name: "*.txt"
      allow_multiple: 1
      remove_file: 0
      return_all: 1
      cool_off: 2
  ArrayFanout__2: !ruby/object:ArrayFanout
    attributes:
      name: W0__Each file
      fanout_variable: all_files
```

```
      fanned_as: file
      variable_type: string
  WorkflowLauncher__3: !ruby/object:WorkflowLauncher
    attributes:
      name: W0__Process file
      workflow_id: <PER_FILE_ID>
      wait_for_completion: 1
      fail_if_failure: 1
  Funnelin__4: !ruby/object:Funnelin
    attributes:
      name: W0__Wait all
      funnel_variable: file
      funnel_type: string
      funneled_inputs: "{'WorkOrder_ID'=>'int'}"
      return_status: 1
      fail_if_failures: 1
- LocalFileWatcher__1: []
  ArrayFanout__2: []
  WorkflowLauncher__3: []
  Funnelin__4: []
- {}
- LocalFileWatcher: 1.9.3
  ArrayFanout: 1.2.2
  WorkflowLauncher: 1.6.1
  Funnelin: 1.1.3
```

```
ascli orchestrator workflows import per_file.yml @json:'{"publish":true}'
ascli orchestrator workflows import watch_folder.yml @json:'{"publish":true}'
ascli orchestrator workflows start <WATCH_FOLDER_ID> @json:'{}'
```

Observed with the files `a_ok.txt`, `b_ok.txt` and `c_locked.txt`, the last one made impossible to delete (`chattr +i`). The folder belongs to the user that runs Orchestrator (`aspweb`), so that `per_file` can delete the files:

- One work order of `per_file` per file. The executions of the fanned step are named `Process file (0)`, `Process file (1)`, ... in `Step_information`.
- Outputs of `Wait all`, by work step id: `Hash_by_state_id` (value of `file`), `Status_by_state_id`; by value of `file`: `Status_hash`, and `WorkOrder_ID_hash` for the input `WorkOrder_ID` declared in `funneled_inputs`. For example `Status_hash` is `{"/tmp/doc_test_watch/a_ok.txt" => "Complete", "/tmp/doc_test_watch/b_ok.txt" => "Complete", "/tmp/doc_test_watch/c_locked.txt" => "Failed"}`.
- `Wait all` ends with `Failed` (`fail_if_failures`: `Funneled in 3 work steps with 1 failures`), and the work order goes to `Fail`. When all files are processed, it goes to `End`.
- The work order that detected the files continues; a clone waits for the next files: cancel it to stop the monitoring.
- `c_locked.txt` stays in the folder, and the clone does not detect it again: it shares the history of the first work order.

Rules of this pattern (from `ArrayFanout` and `Funnelin`, and tests):

- Exactly one step between `ArrayFanout` and `Funnelin`. `ArrayFanout` ends with `Error` when its `Complete` exit leads to more than one step ("Only one step is supported between fan-out and funnel-in"), or when the `Complete` exit of that step leads to more than one step ("Funneled-step should only exit complete in the funnel-in step"). A chain of two steps is not refused, but is wrong: observed with `ArrayFanout`, two `FileInfo` steps and `Funnelin`, on three files, the first step ran three times, the second one once (first file), and `Funnelin` reported `Funneled in 1 work steps`; the work order completed. For more processing, use a `SubWorkflow` or `WorkflowLauncher` step, as here.
- Connect `Funnelin` to each end status of that step (`Complete`, `Failed`, `Error`), with `Synch_factor` 1: `ArrayFanout` replaces 1 by the number of elements, so `Funnelin` waits for all executions, whatever their status. With a link on `Complete` only, a failed execution has no next step, and the work order fails at once (`No behavior defined for step status change to Failed - in Process file (1)`).
- Write `remove_file` `0` (or `1`). Left blank, the watcher keeps no history (see LocalFileWatcher): a file still in the folder is detected again by each clone. This was observed with this recipe without `remove_file`: with `c_locked.txt` left in the folder, each new clone started `per_file` on it again.
- A new start of `watch_folder` has an empty history: it processes again the files left in the folder. Move a file whose processing fails to an error folder.

3.11.7 Recipe: queue and resource pool

Workflow `queue` runs step `Work` for one work order at a time, in the order the work orders started:

- `Enqueue` (`QueueStager`, operation `Add`): adds the runtime parameter `item` to the queue `doc test queue`, created on first use (`adhoc_queue`). With `lifetime` `WorkOrder`, the items of a work order that stopped are removed from the queue.
- `Reserve` (`LoadManager`, action `Reserve`): reserves a resource of the pool `doc test pool`, created on first use (default `is_adhoc`) with one resource of capacity 1 (`max_resources`, `resource_capacity`). With `queue_id` set to the queue, and input `Expected_queued_item` mapped to output `Queued_item` of `Enqueue`, it waits until this item is the first of the queue and a resource is free, and then removes the item from the queue. The value of an item identifies it: use a value that is unique to the work order, for example a file path.
- `Work` (`CustomRuby`): 10 seconds of work; with `fail` set to `yes`, it raises an exception (`Error`).
- `Release` and `Release on error` (`LoadManager`, action `Release`): release the reservation (input `Allocation_token_to_release` mapped to output `Allocation_token` of `Reserve`), after `Complete` of `Work`, and after `Failed` or `Error` (`Synch_factor` 1). A reservation that is not released holds the resource until `resource_hold_timeout` (none by default): the next work orders wait.

```
---
- !ruby/object:Workflow
  attributes:
    name: queue
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters><Parameter id="p_item"/><Parameter
↪  id="p_fail"/></Parameters></Start>
      <Error x="1200" y="350"
↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="1200" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="release" status="Complete"/></Prerequisites></End>
      <Fail x="1200" y="200" id="fail"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="release_error" status="Complete"/></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50"
↪  id="enqueue"><Action_id>1</Action_id><Step_name>Enqueue</Step_name><Step_type>QueueStager</Step_type><Sy
        <Prerequisites><Prerequisite id="start"
↪  status="true"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="Queued_item"><Map_to type="parameter"
↪  name="item"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="525" y="50"
↪  id="reserve"><Action_id>2</Action_id><Step_name>Reserve</Step_name><Step_type>LoadManager</Step_type><Sy
        <Prerequisites><Prerequisite id="enqueue"
↪  status="Complete"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="Expected_queued_item"><Map_to type="output" name="Queued_item"
↪  step_type="QueueStager" action_id="1"
↪  step_name="Enqueue"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="750" y="50"
↪  id="work"><Action_id>3</Action_id><Step_name>Work</Step_name><Step_type>CustomRuby</Step_type><Synch_fac
        <Prerequisites><Prerequisite id="reserve"
↪  status="Complete"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="fail"><Map_to type="parameter"
↪  name="fail"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="975" y="50"
↪  id="release"><Action_id>4</Action_id><Step_name>Release</Step_name><Step_type>LoadManager</Step_type><Sy
        <Prerequisites><Prerequisite id="work"
↪  status="Complete"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="Allocation_token_to_release"><Map_to type="output"
↪  name="Allocation_token" step_type="LoadManager" action_id="2"
↪  step_name="Reserve"/></Input></Inputs><Outputs></Outputs></Step>
```

```
      <Step x="975" y="200" id="release_error"><Action_id>5</Action_id><Step_name>Release on
↪  error</Step_name><Step_type>LoadManager</Step_type><Synch_factor x="895" y="220">1</Synch_factor>
      <Prerequisites><Prerequisite id="work" status="Failed"/><Prerequisite id="work"
↪  status="Error"/></Prerequisites><Parameters></Parameters>
      <Inputs><Input name="Allocation_token_to_release"><Map_to type="output"
↪  name="Allocation_token" step_type="LoadManager" action_id="2"
↪  step_name="Reserve"/></Input></Inputs><Outputs></Outputs></Step>
    </Steps>
    <Parameters><Parameter x="100" y="200"
↪  id="p_item"><Name>item</Name><Value></Value><Value_type>string</Value_type><Runtime_override>true</Runti
    <Parameter x="100" y="300"
↪  id="p_fail"><Name>fail</Name><Value>no</Value><Value_type>string</Value_type><Runtime_override>true</Run
    <Notes></Notes>
    </Workflow>
- QueueStager__1: !ruby/object:QueueStager
  attributes:
    name: W0__Enqueue
    operation: Add
    queue_name: doc test queue
    adhoc_queue: 1
    lifetime: WorkOrder
  LoadManager__2: !ruby/object:LoadManager
  attributes:
    name: W0__Reserve
    manager_action: Reserve
    unique_id: doc test pool
    max_resources: 1
    resource_capacity: 1
    unicity_type: absolute
    queue_id: doc test queue
  CustomRuby__3: !ruby/object:CustomRuby
  attributes:
    name: W0__Work
    optional_inputs: "{'fail'=>'string'}"
    execute_code: "sleep 10; raise 'asked to fail' if @inputs['fail'] == 'yes'; outputs['done_at']
↪  = Time.now.utc.strftime('%H:%M:%S')"
    typed_outputs: "{'done_at'=>'string'}"
  LoadManager__4: !ruby/object:LoadManager
  attributes:
    name: W0__Release
    manager_action: Release
  LoadManager__5: !ruby/object:LoadManager
  attributes:
    name: W0__Release on error
    manager_action: Release
- QueueStager__1: []
  LoadManager__2: []
  CustomRuby__3: []
  LoadManager__4: []
  LoadManager__5: []
- {}
- QueueStager: 0.9.5
  LoadManager: 0.5.3
  CustomRuby: 0.7.3
```

```
ascli orchestrator workflows import queue.yml @json:'{"publish":true}'
ascli orchestrator workflows start <ID> @json:'{"item":"a"}'
ascli orchestrator workflows start <ID> @json:'{"item":"b","fail":"yes"}'
ascli orchestrator workflows start <ID> @json:'{"item":"c"}'
ascli orchestrator queues list
ascli orchestrator pools status 'doc test pool'   # taken 0, capacity 1: all released
```

Observed: `Reserve` waited 0 s for `a`, 15 s for `b` and 25 s for `c` (`processingTime` in `Step_information`). `a` and `c` end `Complete`; `b` ends `Failed`, through `Release on error`. Generic resources are named `resource_1`, `resource_2`, … (output `Resource_reserved`).

3.11.8 Recipe: lookup table

Workflow `lookup` takes the settings of the runtime parameter `profile` from a table (see SimpleParameterLookup), and fails for an unknown profile. Rows are separated by `\n` in a double-quoted value.

```
---
- !ruby/object:Workflow
  attributes:
    name: lookup
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters><Parameter id="p_profile"/></Parameters></Start>
      <Error x="900" y="350"
 ↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="900" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
 ↪  id="build" status="Complete"/></Prerequisites></End>
      <Fail x="900" y="200" id="fail"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
 ↪  id="lookup" status="Failed"/></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50" id="lookup"><Action_id>1</Action_id><Step_name>Profile
 ↪  settings</Step_name><Step_type>SimpleParameterLookup</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="start"
 ↪  status="true"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="Profile"><Map_to type="parameter"
 ↪  name="profile"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="600" y="50" id="build"><Action_id>2</Action_id><Step_name>Build
 ↪  command</Step_name><Step_type>CustomRuby</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="lookup"
 ↪  status="Complete"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="options"><Map_to type="output" name="Options"
 ↪  step_type="SimpleParameterLookup" action_id="1" step_name="Profile settings"/></Input>
        <Input name="extension"><Map_to type="output" name="Extension"
 ↪  step_type="SimpleParameterLookup" action_id="1" step_name="Profile
 ↪  settings"/></Input></Inputs><Outputs></Outputs></Step>
      </Steps>
      <Parameters><Parameter x="100" y="200"
 ↪  id="p_profile"><Name>profile</Name><Value>MP4</Value><Value_type>string</Value_type><Runtime_override>t
      <Notes></Notes>
      </Workflow>
- SimpleParameterLookup__1: !ruby/object:SimpleParameterLookup
    attributes:
      name: W0__Profile settings
      parameters_associations: "Profile:::Options:::Extension\nMP4:::-c:v libx264:::mp4\nWEBM:::-c:v
 ↪  libvpx-vp9:::webm\n/^AUDIO/:::-vn -c:a libmp3lame:::mp3"
  CustomRuby__2: !ruby/object:CustomRuby
    attributes:
      name: W0__Build command
      mandatory_inputs: "{'options'=>'string','extension'=>'string'}"
      execute_code: "outputs['command'] = \"ffmpeg -i in.mov #{@inputs['options']}
 ↪  out.#{@inputs['extension']}\""
      typed_outputs: "{'command'=>'string'}"
- SimpleParameterLookup__1: []
  CustomRuby__2: []
- {}
- SimpleParameterLookup: 0.8.8
  CustomRuby: 0.7.3
```

```
ascli orchestrator workflows start <ID> @json:'{"profile":"webm"}' @json:'{"step":"Build
 ↪  command","variable":"command"}'       # ffmpeg -i in.mov -c:v libvpx-vp9 out.webm
ascli orchestrator workflows start <ID> @json:'{"profile":"AUDIO_HQ"}' @json:'{"step":"Build
 ↪  command","variable":"command"}'   # ffmpeg -i in.mov -vn -c:a libmp3lame out.mp3
```

- `webm` matches `WEBM`: the comparison ignores case by default (`case_sensitive`).
- `AUDIO_HQ` matches the row `/^AUDIO/`, a regular expression.
- With `{}`, `profile` has its default value `MP4`.
- `PRORES` matches no row: `Profile settings` ends with `Failed` (`No configuration match for data set: Profile:PRORES`), and the work order goes to `Fail`.

3.11.9 Recipe: operator decision

Workflow `review` delivers to the runtime parameter `target` if it is valid, and otherwise asks an operator for another target. Two branches join in a `MergePoint` step:

- `Check target` (`Filter`): `Complete` if `target` starts with `/data/`, `Failed` otherwise.
- `Ask operator` (`UserInput`), after `Failed`: creates a task in the web interface (tab Tasks) for the user `admin` (`assigned_user_logins`), described as `Invalid target for <TITLE>`. The task shows `title` and `target` (`mandatory_inputs`), and asks for `new_target` (required, `required_requested_data`) and `rejected` (optional, `user_outputs`): they become outputs of the step. For another layout of the task, see Custom form.
- `Check rejection` (`Filter`): `Failed` if the operator wrote `yes` in `rejected`: the work order goes to `Fail`.
- `Merge target` (`MergePoint`), after `Complete` of `Check target` or of `Check rejection` (`Synch_factor` 1): output `target` is input `target` (mapped to `new_target` of `Ask operator`) when it has a value, and input `target_alternate` (mapped to the parameter `target`) otherwise. When `Ask operator` did not run, its outputs have no value.
- `Deliver` (`CustomRuby`): uses `target` of `Merge target`.

```
---
- !ruby/object:Workflow
  attributes:
    name: review
    run_as: SYSTEM
- !ruby/object:Whiteboard
  attributes:
    error_free: true
    xml_export: |
      <?xml version="1.0" encoding="UTF-8"?>
      <Workflow id="0">
      <Start x="100" y="50" id="start"><Parameters><Parameter id="p_title"/><Parameter
↪  id="p_target"/></Parameters></Start>
      <Error x="1400" y="350"
↪  id="error"><Synch_factor>0</Synch_factor><Prerequisites></Prerequisites></Error>
      <End x="1400" y="50" id="end"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="deliver" status="Complete"/></Prerequisites></End>
      <Fail x="1400" y="200" id="fail"><Synch_factor>0</Synch_factor><Prerequisites><Prerequisite
↪  id="check_rejection" status="Failed"/></Prerequisites></Fail>
      <Steps>
      <Step x="300" y="50" id="check_target"><Action_id>1</Action_id><Step_name>Check
↪  target</Step_name><Step_type>Filter</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="start"
↪  status="true"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="target"><Map_to type="parameter"
↪  name="target"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="500" y="200" id="ask"><Action_id>2</Action_id><Step_name>Ask
↪  operator</Step_name><Step_type>UserInput</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="check_target"
↪  status="Failed"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="title"><Map_to type="parameter" name="title"/></Input><Input
↪  name="target"><Map_to type="parameter" name="target"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="750" y="200" id="check_rejection"><Action_id>3</Action_id><Step_name>Check
↪  rejection</Step_name><Step_type>Filter</Step_type><Synch_factor>0</Synch_factor>
        <Prerequisites><Prerequisite id="ask"
↪  status="Complete"/></Prerequisites><Parameters></Parameters>
        <Inputs><Input name="rejected"><Map_to type="output" name="rejected" step_type="UserInput"
↪  action_id="2" step_name="Ask operator"/></Input></Inputs><Outputs></Outputs></Step>
      <Step x="1000" y="50" id="merge"><Action_id>4</Action_id><Step_name>Merge
↪  target</Step_name><Step_type>MergePoint</Step_type><Synch_factor x="920" y="70">1</Synch_factor>
```

```
      <Prerequisites><Prerequisite id="check_target" status="Complete"/><Prerequisite
↪  id="check_rejection" status="Complete"/></Prerequisites><Parameters></Parameters>
      <Inputs><Input name="target"><Map_to type="output" name="new_target" step_type="UserInput"
↪  action_id="2" step_name="Ask operator"/></Input>
      <Input name="target_alternate"><Map_to type="parameter"
↪  name="target"/></Input></Inputs><Outputs></Outputs></Step>
    <Step x="1200" y="50"
↪  id="deliver"><Action_id>5</Action_id><Step_name>Deliver</Step_name><Step_type>CustomRuby</Step_type><Sy
      <Prerequisites><Prerequisite id="merge"
↪  status="Complete"/></Prerequisites><Parameters></Parameters>
      <Inputs><Input name="target"><Map_to type="output" name="target" step_type="MergePoint"
↪  action_id="4" step_name="Merge target"/></Input></Inputs><Outputs></Outputs></Step>
    </Steps>
    <Parameters><Parameter x="100" y="200" id="p_title"><Name>title</Name><Value>clip
↪  1</Value><Value_type>string</Value_type><Runtime_override>true</Runtime_override><Runtime_optional>true<
    <Parameter x="100" y="300"
↪  id="p_target"><Name>target</Name><Value>/data/default</Value><Value_type>string</Value_type><Runtime_ove
    <Notes></Notes>
    </Workflow>
- Filter__1: !ruby/object:Filter
  attributes:
    name: W0__Check target
    command: "'<%= target %>'.start_with?('/data/')"
  UserInput__2: !ruby/object:UserInput
  attributes:
    name: W0__Ask operator
    event_description: "Invalid target for <%= title %>"
    assigned_user_logins: admin
    mandatory_inputs: "{'title'=>'string','target'=>'string'}"
    required_requested_data: "{'new_target'=>'string'}"
    user_outputs: "{'rejected'=>'string'}"
  Filter__3: !ruby/object:Filter
  attributes:
    name: W0__Check rejection
    command: "'<%= rejected %>' != 'yes'"
  MergePoint__4: !ruby/object:MergePoint
  attributes:
    name: W0__Merge target
    merged_inputs: "{'target'=>['','','string','required']}"
  CustomRuby__5: !ruby/object:CustomRuby
  attributes:
    name: W0__Deliver
    mandatory_inputs: "{'target'=>'string'}"
    execute_code: "outputs['result'] = \"delivered to #{@inputs['target']}\""
    typed_outputs: "{'result'=>'string'}"
- Filter__1: []
  UserInput__2: []
  Filter__3: []
  MergePoint__4: []
  CustomRuby__5: []
- {}
- Filter: 0.3.1
  UserInput: 0.8.2
  MergePoint: 0.5.2
  CustomRuby: 0.7.3
```

```
ascli orchestrator workflows start <ID> @json:'{"target":"/data/ok"}'
↪  @json:'{"step":"Deliver","variable":"result"}'   # delivered to /data/ok
ascli orchestrator workflows start <ID> @json:'{"title":"clip 2","target":"bad/path"}'
```

The second work order waits on `Ask operator`. In the web interface, the operator fills the form and clicks `Complete Task`. Observed:

- `new_target` `/data/fixed`, `rejected` empty: `delivered to /data/fixed`, work order `Complete`.
- `rejected` `yes`: `Check rejection` ends with `Failed`, work order `Failed`.
- Output `InputProvider` of `Ask operator` is the id of the user who completed the task (`1` for `admin`).

The REST API can also complete a task:

```
GET api/list_tasks/self                                          # the tasks of the current user: id,
 ↪  event, requested_user_inputs (name, required, value_type)
GET api/task_details/<TASK_ID>                                   # the task, and the values shown to
 ↪  the operator in task_inputs
GET api/submit_task/<TASK_ID>?outputs[new_target]=/data/fixed    # completes the task
```

Observed on 4.1.6:

- Without a required output, `submit_task` refuses with `Missing data for <NAME>` (HTTP 404, in the error description), and the task stays open.
- A step assigned to several groups has one task per group: when one is completed, the others end with status `Preempted`.

3.11.9.1 Custom form

`Ask operator` above uses the default form: the inputs, then one field per requested data. For another layout, write the content of the form in a file, and give its name in attribute `view_template`. The file replaces the default content. The buttons `Cancel` and `Complete Task` stay below it, in the same HTML form: do not add them.

Install the file on the Orchestrator server, with owner `aspweb`: `/opt/aspera/var/config/orchestrator/actions_config/user_inputs/_<NAME>.html.erb`. The name must start with `_`. The designer lists the files of this folder in View template.

In the file	Meaning
`received_parameters['<NAME>']`	Value of the input `<NAME>` of the step.
`requested_user_inputs`	The requested data: a map of name to type.
`active_assignment`	The task.
A field named `outputs[<NAME>]`	Value of the output `<NAME>` of the step.
`draw_input('outputs', '<NAME>', '<TYPE>', <DEFAULT_VALUE>, '<HTML_ATTRIBUTES>')`	Draws a field for the type: `flag`, `int`, `float`, `string`, `pwd`, `array`, `hash`, `object`, `date` or `attachment`. The last two arguments are optional.
`draw_input_string('outputs', '<NAME>', <DEFAULT_VALUE>, '<HTML_ATTRIBUTES>')`	Same as `draw_input` with type `string`.
`draw_input_flag('outputs', '<NAME>', <DEFAULT_VALUE>, '<HTML_ATTRIBUTES>')`	Same as `draw_input` with type `flag`: a check box.

This form shows a file name and a video, and asks for a target, a path, a date with time, and a description. It is a shorter version of the form in the figure of the Workflow development practices chapter.

`_external_delivery.html.erb`:

```
<%# Inside the task form: the buttons Cancel and Complete Task are already there. %>
<style>
  .delivery .bar { background: #00608f; color: #fff; padding: 0.15em 0.7em; }
  .delivery video { width: 100%; margin: 0.6em 0; }
  .delivery p { margin: 0.6em 0; }
  .delivery label { margin-right: 2em; }
</style>
<div class="delivery">
  <h3>External delivery</h3>
  <div class="bar">File name</div>
  <p><%= File.basename(received_parameters['media_file_path'].to_s) %></p>
  <div class="bar">Preview</div>
  <video controls preload="metadata" src="https://test-videos.co.
   ↪  uk/vids/bigbuckbunny/mp4/h264/360/Big_Buck_Bunny_360_10s_1MB.mp4"></video>
  <div class="bar">Target</div>
  <p>
    <% ['VOD Distrib', 'CABLE Distrib', 'MOBILE Distrib'].each do |target| %>
      <label><input type="radio" name="outputs[target]" value="<%= target %>" required> <%= target
       ↪  %></label>
    <% end %>
```

```
  </p>
  <p><label>Media path <input type="text" name="outputs[final_media_path]"
   ↪  value="/export/cable/hi-res/"></label></p>
  <p><label>Offer start <input type="datetime-local" name="outputs[date_start]"></label></p>
  <p><label>Description <%= draw_input('outputs', 'description',
   ↪  requested_user_inputs['description']) %></label></p>
</div>
```

Attributes of the `UserInput` template:

```
view_template: _external_delivery.html.erb
mandatory_inputs: "{'media_file_path'=>'string'}"
required_requested_data: "{'target'=>'string'}"
user_outputs: "{'final_media_path'=>'string','date_start'=>'string','description'=>'string'}"
```

Observed on 4.1.6:

- The file is read each time the task opens: a change applies without a restart. If the file is missing, the task does not open (HTTP 500).
- A workflow export contains only the name of the file: copy the file to the target server.
- The Ruby code runs on the server when the task opens. The task page has no Content-Security-Policy: a `<script>` in the file runs, and an external video loads.
- The video of this sample is a fixed test file. In a real form, pass the URL in an input, for example the output `output_file_path` of a `ConvertPath` step: with `input_mount_point` `/data/ingest/media` and `output_mount_point` `https://<WEB_HOST>/media/`, the file `/data/ingest/media/clip1.mp4` gives `https://<WEB_HOST>/media/clip1.mp4`. Use a web server that the browser of the operator can reach: `/aspera/orchestrator/images/` on the Orchestrator server gives HTTP 500.
- Only the outputs declared in the template are stored: a field with another name is ignored.
- A declared output with no field in the submitted form gets the text `nil`, not an empty value: for example `target` when no radio button is selected. An empty text field gives an empty value. An output not given to `api/submit_task` also gets the text `nil`.
- When the form is submitted, the server does not check the required data: without `target`, the step ends with `Complete`. Only the browser can refuse: set the HTML attribute `required`, as in this sample. `api/submit_task` does check them.
- `Cancel` only closes the dialog, and the task stays open. To let the operator refuse, ask for it in a field, such as `rejected` in the recipe above.
- `draw_input` with type `string` draws a field that is read-only until it has the focus.
- `draw_input` with type `date` has no time. For a date with time, use `<input type="datetime-local">` and requested data of type `string`: the value looks like `2026-12-01T08:00`.

3.11.10 Update an existing workflow

`import_workflow` always creates a new workflow. To add a revision to an existing workflow, the file must be on the Orchestrator host, and `import_with_constraints` is called with `add as revision`:

1. Have the file on the server. `import_workflow` stores each uploaded file in `<RUN_DIR>/workflows/import/<IMPORT_FILE_NAME>` (for example `/opt/aspera/orchestrator/var/run/orchestrator/workflows/import/`), but also imports it as a new workflow. Upload it with `publish_workflow` set to `false`, so that this copy is not published, and delete the copy in the user interface.
2. Call `import_with_constraints` with the path of the file and the id of the workflow to update (see import_with_constraints). The response is the workflow; its last revision is the imported one.
3. Publish the workflow: the new revision becomes the running one.

The new revision has its own action templates: an embedded template is named `W<WORKFLOW_ID>__<STEP_NAME>_1`, because the name `W<WORKFLOW_ID>__<STEP_NAME>` is used by the template of the previous revision.

With `ascli`:

```
ascli orchestrator workflows import_with_constraints
 ↪  @json:'{"filename":"/opt/aspera/orchestrator/var/run/orchestrator/workflows/import/my_workflow.
 ↪  yml","add_as_revision":239}'
ascli orchestrator workflows publish 239
```

3.12 Authoring checklist

Import and publish do not check these rules. The designer checks most of them before setting `error_free`.

`ascli orchestrator workflows check_import <FILE>` checks a part of them on a file, with no server, and reports errors and warnings with a rule code:

Group	Codes (prefix)
File and YAML layout	`file.*`, `yaml.*`, `package.*`, `workflow.name_missing`, `whiteboard.*`
Templates	`template.*` (key, tag, attributes, booleans written `1` and `0`)
Graph	`graph.*`: terminal nodes once (`graph.terminal_count`), at least one step, unique ids and step names, `Synch_factor` present, not negative, and with a position when not `0` (`graph.synch_factor_position`), prerequisites that exist, no orphan step (`graph.step_orphan`), a path to a terminal node (`graph.no_termination`), a template for each step, outputs and parameters that exist, each step is a prerequisite with status `Complete` of another step or of `End`, `Fail` or `Error` (`graph.step_no_output`)
Inputs	`step.input_missing`, `step.input_unknown`, `step.output_unknown`

It checks the templates and inputs against the specifications of the shipped plugins (the ones of `ascli orchestrator plugins spec`): for another plugin it only warns (`template.plugin_unknown`). It does not know which plugins the server enables, and it does not run the code of a step. A file with no problem can still fail at run time, so read the lists below. `ascli orchestrator workflows import` runs the same check and prints its problems as warnings.

File:

- Six elements, in order; elements 4, 5 and 6 present, even empty.
- Plain format: no line matching `concise_attributes:`; booleans of templates written `1` and `0`.
- `error_free: true` in the whiteboard.
- Each template key `<STEP_TYPE>__<N>` matches the `Step_type` and `Action_id` of its steps.
- Embedded templates named `W0__<STEP_NAME>`.
- `LocalFileWatcher` templates have `remove_file` `0` or `1`, not blank (else no trigger history).
- No secret in the file: secrets are given by runtime `pwd` parameters, or by remote nodes (see Using secrets).

Graph:

- `Start`, `End`, `Fail`, `Error` present once; at least one `Step`.
- `End`, `Fail`, `Error` and each `Step` have `Synch_factor`; each `Step` has `Inputs` and `Outputs` (may be empty).
- Each step has a name, unique in the workflow, and a type of an enabled plugin.
- Each step has at least one prerequisite (else it never runs: ”Step is orphaned”).
- Each step is the prerequisite of at least one node with status `Complete` or `true` (else: ”Step does not have output”).
- At least one prerequisite reaches `End`, `Fail` or `Error` (else: ”Workflow does not terminate”).
- Each `Map_to` of type `output` refers to an existing step, by `step_name`, `step_type` and `action_id`.
- Each `Map_to` of type `parameter` refers to a defined parameter, linked to `Start` or a step.
- Each required input of each template is mapped.
- Each parameter has a `Name` and a `Value_type`; a parameter that is not a runtime parameter, or that is an optional runtime parameter, has a `Value`.
- Join nodes after mutually exclusive / alternative branches have `Synch_factor` 1; join nodes after concurrent parallel nominal branches have `Synch_factor` 0.
- Each `Synch_factor` other than `0` has attributes `x` and `y`, else the designer shows an empty canvas.
- Each `router`, when present, is one of the four `draw2d.*ConnectionRouter` values: Manhattan on step prerequisites (Bezier only where the graph reads better), Bezier on parameter links.
- Retry settings (`Error_*`, `Failed_*`) only on steps that have an outgoing branch with that status.

3.13 Known issues

Observed in Orchestrator 4.1.6:

- A negative `Synch_factor` is never met (see Prerequisites and branches).
- When a `Synch_factor` other than `0` has no attributes `x` and `y`, the designer opened from the list of workflows generates `workflow.addFigure(<JOIN>, , );` (`WhiteboardsHelper#draw_operator`): the JavaScript does not parse, and the canvas is empty. The Revisions tab (`draw_xmlconnections`) skips the join symbol and shows the graph.
- `find_constraints` returns empty constraints for a file that does not exist.
- `LocalFileWatcher` keeps a history of past triggers only when `remove_file` is `false`, not when it is null (the database default): a template that leaves it blank detects the same files again at each scan, whatever `trigger_type`.
- `export_workflow` exports dependencies for any non-empty value of `export_with_dependencies`, including `false`.
- `import_workflow` and `import_with_constraints` should refuse a file whose element 4 lists dependencies when element 5 is empty, but the test also requires element 5 to be non-empty: such a file is imported, with template attributes as written.
- `import_workflow` does not import the remote nodes of a `.wkf` package.
- `export_workflow` has no route without the workflow id in the path, although its comment documents `?id=`.
- The `.wkf` package produced by `export_workflow` with dependencies contains an empty copy of itself (the archive is built in the folder it packs).
- API errors return the exception stack trace, and often status 404 or 500 regardless of the cause.
- The example files of the product (`docs/workflow_examples`) contain `<Failed_retry_for_unit>`, while the parser reads `<Failed_retryForUnit>`: that setting is ignored. The same applies to `<Error_retry_for_unit>` (correct: `<Error_retryForUnit>`). Such workflows also exist on servers when imported from a `.wkf` package of unknown origin: the retry period is silently ignored. The designer writes these elements: opened from the list of workflows, it draws the retry settings of the published revision with properties `Failed_retry_for` and `Failed_retry_for_unit` (`WhiteboardsHelper#set_retry_for_branch`), while its retry tab and the parser use `Failed_retryFor` and `Failed_retryForUnit`. So the retry tab shows Retry Duration empty, and a save writes `<Failed_retry_for>` and `<Failed_retry_for_unit>`: the retry period is lost; attempts and delay are kept (observed with the serializer of the designer). The Revisions tab draws from the XML and shows the period.
- The inline validation endpoint `POST external_calls/validate?id=<WORKFLOW_ID>` (`ExternalCallsController#a` `call`, called by `ascp` for each file) is not exempt from the CSRF protection enabled in 4.1.5: the request, without CSRF token, is answered with a redirection to the logon page (HTTP 302), and no work order starts. 4.0.1 had the protection off. The workflow itself can be tested by starting it with runtime parameters `File` (a JSON string) and `File_path`.
- `OrchestratorAlertEntry` does not save its header (`execute` passes only the category and the message).
- At publish, a designer note is looked up by its `note_id` in all workflows (`Note.find_by(note_id:)`): a note whose id is also used in another workflow updates the note of that workflow, and is not shown in this one. The designer generates UUIDs; in a hand-written file, use a UUID too, not `note1`.

Chapter 4

Extending Orchestrator

Two kinds of components add code to Orchestrator: an action plugin adds a step type to workflows, and a portlet adds a widget to the dashboard. They are two applications of the same design. This chapter gives what they share and how they differ. Plugin development and Portlet development give the details of each.

4.1 Plugins and portlets compared

Common points:

- A component is a folder with `<NAME>.rb`, `metadata.yml` with `:revision_history` and `:minimum_server_version`, ERB views, and optional CSS and JavaScript.
- A component has two folders: the stock folder in `/opt/aspera/orchestrator`, and a second one in the configuration folder of Orchestrator, the load folder of a plugin or the user folder of a portlet (see Terminology). Orchestrator prefers the copy in the second one.
- The class is an Active Record model.
- A page, which requires the permission `engine`, lists the components, and enables or disables each one: Plugins and Engine > Portlets.
- Export and import as a gzip tar (`.plugin`, `.portlet`) with `File.tgz` and `untgz`.
- Version reading with `SafeYaml.load_file('metadata.yml')[:revision_history]`, sorted as `[major, minor, revision, patch]`.
- The same libraries: `MultiType` (`TYPE_*`), `Payload.expand`, `OrchConfig`, `Rails.logger`, `BasicUpload` (also used by portlet `csv_editor`) and `ModuleSSHTools` (also included by portlets `aspera_service` and `transfer_console`).
- A component can have its own controller class in its folder.

Differences:

Topic	Plugin	Portlet
Table	One table per plugin, created by a migration; each template is one row.	One shared table `portlets`, no migration; each enabled portlet is one row.
Settings	Attributes, in the template row.	Parameters, in the frame (`link_parameters`).
Naming	`tableize` and `classify` must round-trip.	`camelize` only.
Loading	Zeitwerk, in engine, workers and web.	`load` on demand, web process only.
Compatibility check	Version, beta and dependencies checked.	None.
Controller	Own `<NAME>_controller.rb`, in the `skip_authenticity_token` list.	`<CLASS>Controller < PortletsController`, called by `portlet_action`; CSRF always applies.
Permission	Entitlement of the template (`Action`).	Entitlement of the portlet row (`Portlet:<ROW_ID>`).
Runtime object	Kept between `execute` and `check_status`.	Rebuilt at every display.

4.2 Installing and updating

Topic	Plugin	Portlet
Folder to install in	Stock folder; Enable copies it to the load folder.	User folder: upgrades overwrite the stock folder.
Archive to import	`<CLASS>_<VERSION>.plugin`.	Exactly `<ID>.portlet`.
Import of a name already installed	Stored apart, in `actions_imported/<FOLDER>/<N>/`.	Renamed to `<ID>_version_N`, which breaks a portlet installed in the user folder.
Code change	Edit the stock folder, then Disable and Enable; or edit the load folder, then Reload.	Replace the files in the user folder, then restart the web server.
Restart of the web server	Before importing a workflow file that uses a new plugin.	After each code change.

The steps are in Plugin installation and updates and Portlet installation and updates.

4.3 Testing and debugging

Read `/opt/aspera/orchestrator/log/production.log`, the log of both: your `Rails.logger` messages, and the errors, for a plugin those of loading, of migrations and of execution.

Topic	Plugin	Portlet
Check without a server	`ruby lib/plugin_probe.rb`: fields, inputs, outputs and errors.	`ruby -c <ID>.rb`: syntax only.
Try on the server	Test template, then a step in a workflow.	Preview in a frame, then the URL of an action.
Read the version	`GET api/plugin_version/<CLASS>`.	`GET api/portlet_version/<NAME>`, wrong in 4.1.6: see Known issues.

Symptoms and their causes are in Plugin testing and debugging and Portlet testing and debugging.

4.4 Security

The code of a plugin or of a portlet runs with the rights of Orchestrator.

The same rules apply to the inputs of a plugin, which come from workflows and from external systems, and to the parameters and `params` values of a portlet:

- Validate them.
- Quote them in shell commands (`MultiType.shell_doublequote`, or `Open3` with separate arguments), and use bound parameters in SQL.
- Check that file paths stay in the expected folders.
- Never `eval` them.

Topic	Plugin	Portlet
Settings stored in clear	Template attributes, unless the plugin encrypts them: in the plugin table and in exported workflows.	Parameters: in the frame.
Where a secret comes from	Inputs of type `pwd`, remote nodes, secret references.	A stored credential; `double_password_configurator` only for values that the portlet must hold.
Code entered in the web interface	Templates of `CustomRuby`.	Custom portlets; restrict the permission `engine`.

The details are in Plugin security and Portlet security.

4.5 Learning Ruby and Rails

- Ruby documentation
- Rails guides: Action View for both, Active Record migrations and form helpers for plugins, Action Controller for portlets.

Chapter 5

Plugin development

This chapter explains how to add a step type to workflows by writing an action plugin. Read it when no shipped plugin does the job and a `CustomRuby` step is not enough, or to change an existing plugin.

The shipped plugins are the best set of examples: folder `/opt/aspera/orchestrator/actions` of an Orchestrator server, one folder per plugin. `HelloWorld` (`hello_worlds`) is a reference implementation with pause, resume, cancel, rollback and recovery.

5.1 Plugin quick start

The following plugin `MyGreeting` builds a message from a template attribute with placeholders. When attribute `wait_seconds` is not `0`, it waits that long before completing, without holding a worker (asynchronous execution). Its template form has its own CSS and JavaScript: a live preview of the message.

5.1.1 Plugin source

```
my_greetings/
├── my_greeting.rb                                      class MyGreeting
├── 20261023123000_my_greetings_create_my_greetings.rb  database table
├── metadata.yml                                        version, display name, category
├── edit.html.erb                                       template form
├── edit.css                                            style of the form
├── edit.js                                             script of the form
├── help.html.erb                                       help page
└── MyGreeting.png                                      icon, 128 x 128
```

`my_greeting.rb`:

```ruby
require 'yaml'

# Builds a greeting message from a template attribute with placeholders.
# Runs synchronously, or asynchronously when wait_seconds is not 0.
class MyGreeting < ActiveRecord::Base
  include Action

  # Name of the input that replaces attribute greeting when it is blank (default: "Greeting")
  VAR_GREETING = 'Greeting'
  # Default values make the corresponding inputs optional
  DEFAULT_GREETING = 'Hello'
  DEFAULT_UPPERCASE = false
  DEFAULT_WAIT_SECONDS = 0
  POLLING_SECONDS = 5

  OUT_MESSAGE = 'Message'

  def self.version
    return @@plugin_version_loaded if defined?(@@plugin_version_loaded)
```

```
    versions = SafeYaml.load_file("#{File.dirname(__FILE__)}/metadata.yml")[:revision_history].map {
↪   |change| change[:version].split(".").map { |num| num.to_i } }
    @@plugin_version_loaded = versions.sort_by { |major, minor, revision, patch| [major, minor,
     ↪  revision, (patch.nil? ? 0 : patch)] }.last
    return @@plugin_version_loaded
  end

  def self.display_name
    return 'My greeting'
  end

  def category
    return [CATEGORY_OTHER]
  end

  # greeting: input "Greeting" if blank, else one input per placeholder
  # uppercase, wait_seconds: input if null
  def inputs_spec
    return default_inputs_spec([:greeting, :uppercase, :wait_seconds], {}, {})
  end

  def outputs_spec
    return { OUT_MESSAGE => TYPE_STRING }
  end

  def synchronous_execution?
    return wait_seconds_get.to_i == 0
  end

  def execute
    message = greeting_get
    message = message.upcase if uppercase_get == true
    @outputs = { OUT_MESSAGE => message }
    return STATUS_COMPLETE, message, @outputs if synchronous_execution?

    # Instance variables are kept until check_status (the action is persisted between calls)
    @ready_at = Time.now + wait_seconds_get.to_i
    return nil, "Waiting #{wait_seconds_get} s", POLLING_SECONDS
  end

  def check_status
    return STATUS_FAILED, 'Canceled', nil if must_cancel?
    remaining = (@ready_at - Time.now).ceil
    return nil, "Waiting, #{remaining} s left", POLLING_SECONDS if remaining > 0
    # Outputs are taken from @outputs
    return STATUS_COMPLETE, @outputs[OUT_MESSAGE], nil
  end

  # Defining cancel makes the step cancelable: the cancel request is seen by must_cancel?
  def cancel
    return true
  end
end
```

`20261023123000_my_greetings_create_my_greetings.rb`:

```
class MyGreetingsCreateMyGreetings < ActiveRecord::Migration[8.0]
  def change
    create_table :action_my_greetings do |t|
      t.string :name
      t.string :comments
      t.text :greeting
      t.boolean :uppercase
      t.integer :wait_seconds

      t.timestamps
    end
```

```
  end
end
```

metadata.yml:

```
---
:revision_history:
  - :author: "<AUTHOR>"
    :change_description: Initial release
    :version: 1.0.0
    :date: "2026-10-23"
    :minimum_server_version: 4.1.0

:display_name: My greeting
:category: Other Utilities
:help: "Builds a greeting message from a pattern with placeholders."
:plugin_name: MyGreeting
:description: Example plugin of the Aspera Orchestrator Development Guide.
```

edit.html.erb:

```
<%# The CSS and JS files are read from the plugin folder: they are not ERB templates %>
<style><%= raw File.read(File.join(@action.action_dir, 'edit.css')) %></style>

<%= form_with model: @my_greeting, url: action_update_path(action_type: "my_greeting", id:
↪  @my_greeting.id), id: "edit_action" do |f| %>
  <li>
    <%= f.label :name %>
    <%= f.text_field :name %>
  </li>
  <li>
    <%= f.label :comments %>
    <%= f.text_field :comments %>
  </li>
  <li>
    <%= f.label :greeting %>
    <%= f.text_area :greeting, rows: 3, placeholder: MyGreeting::DEFAULT_GREETING %>
    <p class="input_help">Text with placeholders, for example <code>Hello &lt;%= who %&gt;!</code>.
    ↪  Blank: input <code><%= MyGreeting::VAR_GREETING %></code>.</p>
  </li>
  <li>
    <%= f.label :uppercase %>
    <%= f.check_box :uppercase %>
  </li>
  <li>
    <%= f.label :wait_seconds %>
    <%= f.number_field :wait_seconds, min: 0, step: 1 %>
  </li>
  <li class="my-greeting-preview">
    <label>Preview</label>
    <output id="my_greeting_preview" data-default="<%= MyGreeting::DEFAULT_GREETING %>"></output>
    <p class="input_help">Inputs from placeholders: <span id="my_greeting_variables"></span></p>
    <button type="button" id="my_greeting_example">Insert example</button>
  </li>
  <% if @view == 'show' %>
  <li>
    <%= f.label 'Required variables' %>
    <%= h Payload.variables(@my_greeting.greeting.to_s).join(', ') %>
  </li>
  <% end %>
<% end %>

<script><%= raw File.read(File.join(@action.action_dir, 'edit.js')) %></script>
```

edit.css:

```
.my-greeting-preview output {
  display: block;
```

```
  padding: 4px 8px;
  border-left: 4px solid #0f62fe;
  background: #edf5ff;
  font-family: monospace;
  min-height: 1.5em;
}
```

`edit.js`:

```
// Runs each time the form is opened: everything stays inside the function
(function () {
  var form = document.getElementById('edit_action');
  var greeting = form.querySelector('#my_greeting_greeting');
  var uppercase = form.querySelector('#my_greeting_uppercase');
  var preview = form.querySelector('#my_greeting_preview');
  var variables = form.querySelector('#my_greeting_variables');
  var example = form.querySelector('#my_greeting_example');

  function update() {
    var text = greeting.value || preview.dataset.default;
    var names = [];
    text.replace(/<%=\s*([A-Za-z_][A-Za-z0-9_]*)\s*%>/g, function (match, name) {
      if (names.indexOf(name) < 0) names.push(name);
      return match;
    });
    var shown = text.replace(/<%=\s*([A-Za-z_][A-Za-z0-9_]*)\s*%>/g, '[$1]');
    preview.textContent = uppercase.checked ? shown.toUpperCase() : shown;
    variables.textContent = names.length ? names.join(', ') : '(none)';
  }

  greeting.addEventListener('input', update);
  uppercase.addEventListener('change', update);
  example.addEventListener('click', function () {
    greeting.value = 'Hello <%= who %>!';
    update();
  });
  update();
})();
```

`help.html.erb`:

```
<h2>My greeting</h2>
<p>Builds a message from attribute <b>Greeting</b>, a text with placeholders <code>&lt;%= name
 ↪  %&gt;</code>: each placeholder is a required input.</p>
<p>If <b>Wait seconds</b> is not 0, the step waits that long before completing (asynchronous
 ↪  execution).</p>
<h3>Output</h3>
<ul><li><code>Message</code>: the message.</li></ul>
```

5.1.2 Plugin install and run

1. Copy the folder to `/opt/aspera/orchestrator/actions/my_greetings`, owned by `aspweb`, and the icon to `/opt/aspera/orchestrator/public/aspera/orchestrator/assets/actions/MyGreeting.png`.
2. Open the Plugins page (`https://<HOST>/aspera/orchestrator/plugins`): `My greeting` is listed, disabled. Click Enable.
3. Restart the web server: `systemctl restart orchestrator_server`, needed to import workflow files that use the new plugin (see Installing a plugin).
4. Use it in a workflow: in the designer, or with a workflow file (see the Workflow authoring chapter).

A template with `greeting` set to `Hello <%= who %>!` and `uppercase` checked has a required input `who`: with `who` = `Laurent`, the step ends `Complete` with output `Message` = `HELLO LAURENT!`. A template with `greeting` blank and `wait_seconds` = 70 has an optional input `Greeting`: the step ends `Complete` after 70 seconds, with `Message` = the value of `Greeting`.

5.2 Plugin folder

5.2.1 Plugin names

All names derive from the class name, with the Rails inflections of Orchestrator:

Item	Rule	Example
Class	CamelCase, includes `Action`, inherits `ActiveRecord::Base`. It is the action type and the `Step_type` of steps.	`MyGreeting`
Folder	`"<CLASS>".tableize`: snake case, plural. Orchestrator finds the class from the folder name (`singularize.camelcase`).	`my_greetings`
Main file	The folder name singularized, `.rb`.	`my_greeting.rb`
Table	`action_<FOLDER>`.	`action_my_greetings`
Icon	`<CLASS>.png`. The shipped icons are 128 x 128.	`MyGreeting.png`
Migration file	`<VERSION>_<DESCRIPTION>.rb`: see Migrations.	`20261023123000_my_greetings_create_my_greetings.rb`

Check that the class name converts back from the folder name: `"MyGreeting".tableize.classify == "MyGreeting"` in a Rails console. Names that end with an irregular plural (`Data`, `Media`) or that contain an acronym declared in `config/initializers/inflections.rb` (`AJAX`, `CGI`, `DBI`, `OS`, `OSX`, `SMTP`, `SSH`, so `SshCopy` becomes `SSHCopy`) do not convert back.

5.2.2 Plugin files

File	Required	Content
`<FOLDER_SINGULAR>.rb`	yes	The plugin class.
`metadata.yml`	yes	Versions, display name, category: see metadata.yml.
`<VERSION>_<DESCRIPTION>.rb`	yes	Migrations: they create the table, see Migrations.
`edit.html.erb`	yes	Template form: see Template form.
`help.html.erb`	no	Help page, see Help page. Shipped in 204 of the 205 plugins.
`<CLASS>.png`	no	Icon in the designer and the template lists. Without it, a generic icon is shown.
`<NAME>_controller.rb`	no	Controller that serves data to the template form (21 shipped plugins), see Server data for the form.
Other `.rb` files	no	Helpers, services (`<NAME>_helper.rb`, `<NAME>_service.rb`).
`Gemfile`	no	Gems of the plugin, see Gems and external tools.
Other files	no	WSDL, payload templates, CSS, JavaScript: read by your code.

When the plugin is loaded, every file of the folder whose name matches `[A-Za-z]*.rb` is loaded with `load`, shortest path first. Migration files start with a digit: they are not loaded with the class. A file must not reference, when loaded, a class defined in a file with a longer name.

At boot, Rails also loads the load folder with Zeitwerk (eager loading): each `.rb` file, also in a subfolder, must define the constant named after its path, for example `my_greeting_helper.rb` defines `MyGreetingHelper`, and `drivers/sdk_service.rb` defines `Drivers::SdkService` (`VantageTranscoding`). Otherwise, Orchestrator does not start (`Zeitwerk::NameError`). Zeitwerk ignores hidden files and folders, see Extending Orchestrator from a plugin.

5.2.3 Plugin metadata file

`metadata.yml` describes the plugin and its versions. Keys are Ruby symbols (`:key:`).

Key	Required	Content
`:revision_history`	yes	List of versions, oldest first.
`:display_name`	yes	Name in the Plugins page.
`:category`	yes	Category in the Plugins page: one of the values of Category, for example `Other Utilities`.
`:plugin_name`	recommended	The class name. Used by the help pages.
`:description`	recommended	One sentence. Shown in the help pages.
`:help`	recommended	Short help text.
`:external_dependencies`	no	Programs required on the server, as `- :bin: "<PROGRAM>"`. Enabling the plugin fails with `External dependency <PROGRAM> not found` if `command -v <PROGRAM>` finds nothing.

Keys of a revision:

Key	Content
`:version`	`major.minor.release`, for example `1.0.0`. Required.
`:author`, `:change_description`, `:date`	Shown in the revision history of the Plugins page.
`:minimum_server_version`	Oldest Orchestrator version for this plugin version, for example `4.1.0`.
`:maximum_server_version`	Newest Orchestrator version.
`:is_beta`	`true`: this version cannot be enabled.
`:deprecation_orch_version`	Orchestrator version from which the plugin is deprecated.

The version of the plugin is the highest `:version` (method `self.version`). Enabling fails if this version is beta, or if the Orchestrator version is out of its `:minimum_server_version` and `:maximum_server_version`. The Plugins page shows the version of the last entry of the list: keep the list in increasing order.

5.2.4 Migrations

The table of the plugin is created and changed by migrations: Rails migration files in the plugin folder. Each template is one row of the table.

Rules:

- File name: `<VERSION>_<DESCRIPTION>.rb`, where `<VERSION>` is a number, by convention the date and time of creation as `YYYYMMDDHHMMSS`. The shipped plugins name the description `<FOLDER>_create_<FOLDER>` for the first migration, and `<FOLDER>_<X_Y_Z>_<CHANGE>` for the migration of version `x.y.z`, for example `20211213103239_local_file_operations_1_1_0_add_source_no_glob.rb`.
- The class name is the description in CamelCase: `MyGreetingsCreateMyGreetings`. It must be unique in Orchestrator: migrations of all plugins are evaluated in the same Ruby namespace.
- The class inherits `ActiveRecord::Migration[8.0]` (600 of the 731 shipped migrations; others use `[6.1]` or `[8.1]`).
- `<VERSION>` must be unique among all migrations of Orchestrator and of all plugins: Rails records applied versions in the table `schema_migrations`, shared by the whole application. A migration whose version is already recorded is not run, and enabling the plugin does not report it: the log shows `Table '...' doesn't exist`, and no default template is created.
- The table is `action_<FOLDER>`, written literally (`:action_my_greetings`): Orchestrator replays the migrations on a copy of the table, replacing that name, to find which ones are applied.
- The first migration creates the table with columns `name` and `comments` (strings) and timestamps (`t.timestamps`), and the attributes of the plugin.
- To change the table in a new version of the plugin, add a migration. Never change a migration that may have been applied.

```ruby
class MyGreetings110AddSignature < ActiveRecord::Migration[8.0]
  def change
    add_column :action_my_greetings, :signature, :string
  end
end
```

Migrations run when the plugin is enabled or upgraded, from the stock folder (see Installing a plugin). If the table does not exist, all migrations run. Otherwise, Orchestrator finds the last migration that the table already matches (columns, types, defaults, indexes), records the versions up to it as applied, and runs the following ones.

Attribute types and the inputs they give (see Inputs from attributes):

Column type	Input type when left null or blank
`string`, `text`	`string` (or the type of a suffix of the attribute name, see below)
`integer`	`int`
`float`, `decimal`	`float`
`boolean`	`flag`
`date`, `datetime`	`date`

5.3 Plugin class

5.3.1 Plugin structure

```ruby
class MyPlugin < ActiveRecord::Base
  include Action

  def self.version; ... end   # [major, minor, release], from metadata.yml
  def category; ... end       # [CATEGORY_...]
  def inputs_spec; ... end    # [required, optional]: name => type
  def outputs_spec; ... end   # name => type
  def execute; ... end        # [status, details, outputs]
end
```

The class must not be empty. Module `Action` includes `ActionTools`, which provides the constants and helpers below. Methods of the template are available: its attributes as methods (`greeting`, `name`), and `id`.

5.3.2 Plugin methods

Method	Required	Default	Called
`self.version`	yes	`[0, 0, 0]`	When loading and listing plugins.
`self.display_name`	no	Class name split into words: `MyGreeting` gives `My greeting`	When enabling, in template lists.
`category`	no	`[CATEGORY_OTHER]`	Action directory of the designer.
`inputs_spec`	yes	raises an error	Designer, publication of a workflow, action tester, API `workflow_inputs_spec`, validation before execution.
`outputs_spec`	yes	raises an error	Same. Orchestrator adds output `Step_information` (`hash`).
`validate_inputs(inputs)`	no	`default_inputs_validation`	Before `execute`.
`execute`	yes	raises an error	To run the step.
`synchronous_execution?`	no	`true`	Before and after `execute`.
`check_status`	if asynchronous	returns `@status`, `@status_details`	Polling of an asynchronous step.

Method	Required	Default	Called
`multiple_execution?`	no	`false`	When the step ends: `true` repeats it in a new work order (triggers).
`timeout`	no	`nil` (server default)	When the step starts.
`timeout_help`	no	`Sorry, no timeout explanation provided.`	Timeout dialog of the designer.
`pause`, `resume`, `cancel`, `rollback`	no	`false` (not supported)	On user request, see Pause, resume, cancel, rollback.
`cancel_on_request?`, `pause_on_request?`, `resume_on_request?`, `rollback_on_request?`	no	`false`	On user request.
`recover`	no	returns `Error`	When a worker finds a synchronous step still `In Progress` after an interruption.
`initialize_default_template`	no	nothing	When the default template (`<CLASS> Default`) is created, at first enable.
`dependencies`	no	`[]`	Export of workflows, see Dependencies.
`name`	no	attribute `name`, else `<CLASS>_<ID>`	Lists.
`remote_execution?`	no	`true`	Only displayed by the action tester in 4.1.6.
`help`, `self.dependencies`	no		Not used by Orchestrator 4.1.6.

`self.version` must cache the version in the class variable `@@plugin_version_loaded`: Orchestrator removes this variable when it upgrades the plugin. Use the code of the Quick start (205 of the 205 shipped plugins use it).

5.3.3 Category

`category` returns an array: the first element is the top category, other elements are sub-categories in the action directory of the designer.

Constant	Value
`CATEGORY_ASSET_MANAGEMENT`	`Asset Management`
`CATEGORY_FILEOPERATIONS`	`File Operations`
`CATEGORY_FILETRANSFER`	`File Transfer`
`CATEGORY_FILETRANSFORMATIONS`	`File Transformations`
`CATEGORY_INTEGRATION`	`Integration`
`CATEGORY_OTHER`	`Other Utilities`
`CATEGORY_QUALITY_CONTROL`	`Quality Control`
`CATEGORY_RESOURCE`	`Resources`
`CATEGORY_SCHEDULING`	`Scheduling`
`CATEGORY_SYSTEM`	`System`
`CATEGORY_TRANSCODING`	`Transcoding`
`CATEGORY_TRIGGERS`	`Triggers`
`CATEGORY_USERINTERACTIONS`	`User Interactions`
`CATEGORY_VIRUS_SCAN`	`Virus Scan`

5.3.4 Plugin types

Types of inputs and outputs, constants of `ActionTools` (from `MultiType`):

Constant	Value
`TYPE_STRING`	`string`
`TYPE_INT`	`int`
`TYPE_FLOAT`	`float`
`TYPE_FLAG`	`flag` (boolean)
`TYPE_DATE`	`date`
`TYPE_ARRAY`	`array`
`TYPE_HASH`	`hash`
`TYPE_OBJECT`	`object`
`TYPE_PASSWORD`	`pwd`
`TYPE_ATTACHMENT`	`attachment`

5.3.5 Plugin statuses

Constants of `ActionTools`, used as return values of `execute` and `check_status`:

Constant	Value	Final
`STATUS_COMPLETE`	`Complete`	yes
`STATUS_FAILED`	`Failed`	yes
`STATUS_ERROR`	`Error`	yes
`STATUS_INPROGRESS`	`In Progress`	no
`STATUS_UNDEFINED`	`Undefined`: the status could not be determined	no
`STATUS_PAUSED`	`Paused`	no
`STATUS_TRUE`	`True`	yes
`STATUS_FALSE`	`False`	no
`STATUS_OBSOLETE`	`Obsolete`	yes

`Inactive`, `Activating`, `Pausing`, `Resuming`, `Canceling` and `Rolling Back` are set by Orchestrator. A step ends with a final status: workflows branch on `Complete`, `Failed` and `Error`. Use `Failed` for a functional failure (the expected result is not there) and `Error` for a technical error.

5.4 Inputs and outputs

`inputs_spec` returns two maps, required inputs and optional inputs, from input name to type. `outputs_spec` returns a map from output name to type.

```
def inputs_spec
  return { 'source' => TYPE_STRING }, { 'overwrite' => TYPE_FLAG }
end

def outputs_spec
  return { 'files' => TYPE_ARRAY }
end
```

Rules:

- Both are called on the template, with `@inputs` not set (designer, publication): compute them from the attributes only.
- The inputs and outputs of a step are created when the workflow is published, from the template at that time.
- At run time, `@inputs` is a hash of input values by name. Orchestrator also gives the inputs `OUTPUTS` (names and types of the outputs), `WORKORDER_ID`, `ATTEMPT` and `RUNNING_AS`. Despite its name, `WORKORDER_ID` is the id of the work step (`state_id`): the id of the work order is `work_order_id`.
- Outputs are taken from the hash returned by `execute`, or from `@outputs` (asynchronous steps). Only outputs declared by `outputs_spec` are stored.

- `validate_inputs` is called before `execute`, with the input values. The default, `default_inputs_validation`, checks that the required inputs are present and that the values have the declared types. To add a check, call it first, and add a message to `@validation_errors` before returning `false`: the step ends with `Error` and details `Invalid inputs: <MESSAGES>`.

```
def validate_inputs(inputs_hash = @inputs)
  return false unless default_inputs_validation(inputs_hash)
  if inputs_hash['count'].to_i < 0
    @validation_errors << 'Input count must not be negative'
    return false
  end
  return true
end
```

5.4.1 Inputs from attributes

Most plugins (186 of 205) let a template attribute come from an input when it is blank, with `default_inputs_spec`, and read it with `default_get`.

`default_inputs_spec(fields, required_inputs, optional_inputs)` adds inputs for the attributes `fields` (default: all attributes except `name`, `comments`, `id` and timestamps) to the two maps, and returns them. Inputs of a step says which attributes give an input, its name, and whether it is required. Placeholders says the same for the placeholders of a text attribute that is set, found with `Payload.variables`.

`default_get(:attribute)`, or `<ATTRIBUTE>_get` (handled by `method_missing`), returns the run time value of an attribute, the first of:

1. The value of the input that replaces the attribute (named as in Inputs of a step), if present.
2. The attribute value, if not blank.
3. The value of the constant `DEFAULT_<ATTRIBUTE>`.

A `string` or `text` value is then expanded with `Payload.expand`: placeholders are replaced by input values. If the attribute name ends with `_<TYPE>`, the value is converted to that type. The result is cached in the instance variable `@<ATTRIBUTE>`: `default_get(:attribute, true)` reads it again.

```
DEFAULT_POLLING_FREQUENCY = 5

def inputs_spec
  required_inputs = {}
  optional_inputs = { 'timeout' => TYPE_INT }
  # command: input Command if blank, else one input per placeholder
  default_inputs_spec([:command], required_inputs, optional_inputs)
  return required_inputs, optional_inputs
end

def execute
  command = command_get                    # expanded value
  delay = polling_frequency_get            # attribute, input Polling_frequency, or 5
  ...
end
```

An attribute handled by your own code (for example `required_inputs[VAR_SERVER] = TYPE_STRING if server.blank?`) gets no input for its placeholders: call `default_inputs_spec` for it, or scan it with `Payload.variables`.

Constants read by Orchestrator:

Constant	Effect
`VAR_<ATTRIBUTE>`	Name of the input that replaces the attribute.
`DEFAULT_<ATTRIBUTE>`	Value when the attribute is blank. Makes the input optional.
`DEFAULT_<NAME>`	Makes the input of the placeholder `<NAME>` optional.
`VALUES_<KEY>`	Allowed values of a key in the hash editor of a form (`constrained_values`).
`SKIP_SANITIZATION_FIELDS`	Attributes whose value is saved without HTML sanitization, see Saved values.

5.4.2 Payload

`Payload.variables(text)` returns the input names used by the placeholders of `text`:

Placeholder	Names returned
`<%= name %>`	`name`
`<%= function(a, b) %>`	`a`, `b` (arguments are input names only)
`<%= var(name).upcase %>`	`name` (`var` in an expression)
`<%= name.upcase %>`, `<% ... %>`	none

`Payload.expand(text, @inputs, self)` replaces them with input values:

- `<%= name %>`: the input value, an empty string if missing (or the value of method `name` of `self` if there is no such input), an array in Ruby notation.
- `<%= function(a, b) %>`: `function` is a method of `self` (the template), of `Payload` (`xml`: a hash as XML elements), or a method with its class (`File.basename`).
- If `<%=` remains after that, the text is evaluated as ERB, where a name is the value of the input with that name (`var(name)` returns its argument). `<% ... %>` tags are evaluated only in that case.
- `<%= var(name) %>` alone raises an error: `var` is a method of `Payload` class only.

Scan with `Payload.variables` when `default_inputs_spec` does not fit, for example to give all inputs one type:

```
def inputs_spec
  required_inputs = {}
  Payload.variables(command).each do |var_name|
    required_inputs[var_name] = TYPE_STRING
  end
  return required_inputs, {}
end

def execute
  expanded_command = Payload.expand(command, @inputs, self)   # command_get does the same
  ...
end
```

5.4.3 MultiType

`MultiType` converts values between their text form and their type:

```
value = MultiType.convert_value(string_value, TYPE_INT)   # text to typed value
string = MultiType.convert_to_string(value)                # typed value to text
hash = MultiType.convert_value_hash(string_hash)           # "{'a'=>1}" or JSON to a Hash
MultiType.validate_type(value, TYPE_INT)                   # true if value has the type
```

5.5 Plugin execution


5.5.1 Synchronous execution

By default (`synchronous_execution?` returns `true`), `execute` does the work in a worker process and returns `status, details, outputs`:

- `status`: a final status, see Statuses.
- `details`: text shown as the status details of the step (at most 255 characters).
- `outputs`: hash of output values.

Orchestrator then stores the declared outputs, adds `Step_information` (step id, name, status, details, attempts, processing time), runs the post-processing code of the step, and activates the next steps.

An exception raised by `execute` ends the step with `Error`, details `Execution error: <MESSAGE>`. A `RuntimeError` whose message is a final status (`raise STATUS_FAILED`) ends the step with that status.

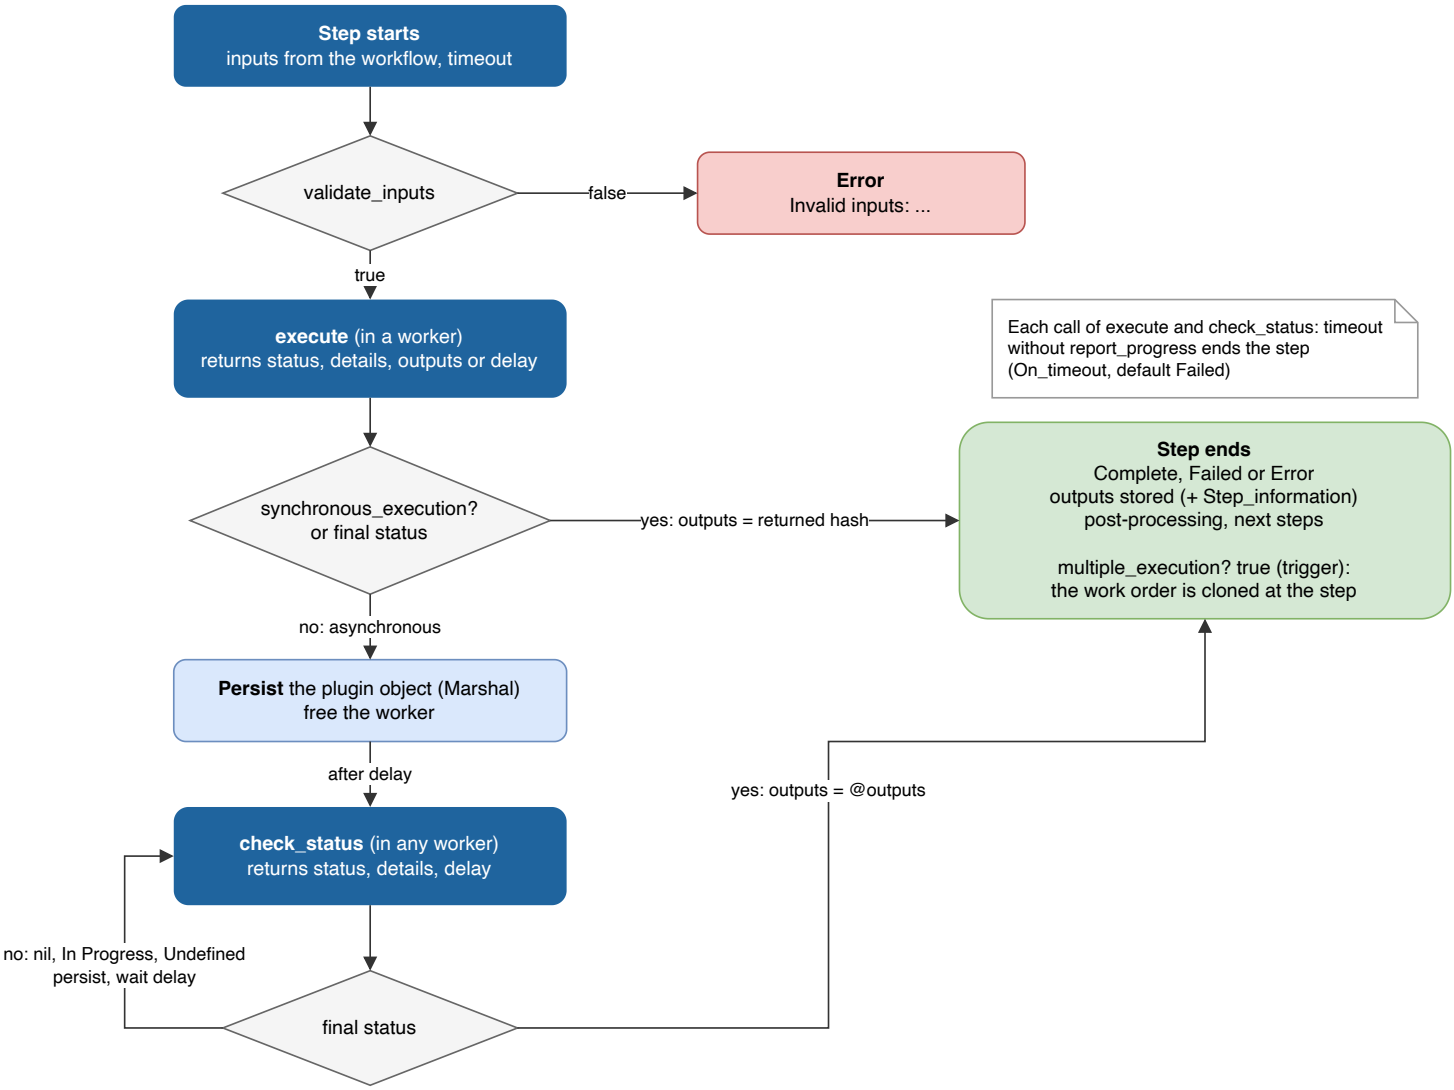

Execution of a work step: synchronous and asynchronous

5.5.2 Asynchronous execution

An operation that waits (a transcoding job, a remote transfer, an event) should not hold a worker. `synchronous_execution?` returns `false`, and the work is split:

- `execute` starts the operation and returns `nil` (or `STATUS_INPROGRESS`), details, and the number of seconds before the first check. It can also return a final status at once.
- Orchestrator persists the plugin object, frees the worker, and calls `check_status` later, in any worker.
- `check_status` returns `status, details, delay`: a final status ends the step; `nil`, `STATUS_INPROGRESS` or `STATUS_UNDEFINED` continue, and `delay` is the number of seconds before the next call (`nil` or `0`: as soon as possible).
- The outputs of the step are the hash `@outputs`: set it before returning a final status.
- `STATUS_UNDEFINED` means the status could not be read: after `max_missed_status` (server setting, default 3) consecutive ones, the step ends with `Error`.
- Set `@percent_complete` to show a percentage.

Between `execute` and `check_status`, the plugin object is serialized with `Marshal`, with its attributes and instance variables (`@ready_at` in the Quick start). Instance variables must be serializable: no open connection, file, thread or `Proc`. Reconnect in each call of `check_status`.

The serialized object includes `@inputs`, where the values of `pwd` inputs are decrypted, and the values cached by `default_get` (`@<ATTRIBUTE>`). `SharedState` stores it according to the server setting `persistence_mode`: file `state_<WORK_STEP_ID>.prst` of the state folder (`disk`), a row of the database (`db`), or a Redis key (`redis`). Do not keep a secret in another instance variable.

5.5.3 Plugin triggers

A trigger waits for an event (a file, a message, a database row) and starts the rest of the workflow for each event. It is an asynchronous plugin, usually in `CATEGORY_TRIGGERS`, whose `multiple_execution?` returns `true`:

- `execute` returns `nil, 'Watching', nil`.
- `check_status` returns `nil, details, delay` while there is no event, and `STATUS_COMPLETE` with `@outputs` describing the event.
- When the step ends with a status other than `Error`, Orchestrator clones the work order at that step: the work order continues with the next steps, the clone waits for the next event. `multiple_execution?` is usually `true` when an attribute asks for continuous monitoring (`keep_ongoing`), and `false` once canceled.

To not report an event twice, include `ModuleTriggerTools`, and save the events already reported:

Method	Content
`retrieve_triggers(default = {})`	The object saved by the last `persist_triggers`, or `default`.
`persist_triggers(object)`	Saves `object` (for example a hash of event ids), returns `true` on success.
`clean_up_triggers`	Deletes the saved object.
`trigger_file_name`	`<RUN_DIR>/<FOLDER>/<WATCHER_PREFIX>_<SCOPE>_triggers.prst`.

The scope of the saved object depends on the attribute `trigger_type`, if the table has one: `by workorder group` (default), `by action template`, `absolute`, `by step`, `by workflow`, `none` (constants `TRIG_*`, see History of past triggers). Define the constant `WATCHER_PREFIX` to name the files of your plugin (default `Watcher`). See `DatabaseTrigger` (`database_triggers`) for a complete trigger in about 300 lines.

```
class MyWatcher < ActiveRecord::Base
  include Action
  include ModuleTriggerTools

  WATCHER_PREFIX = 'MyWatcher'

  def synchronous_execution?
    return false
```

```
  end

  def multiple_execution?
    return (keep_ongoing == true) && (@is_canceled != true)
  end

  def execute
    @past = retrieve_triggers({})
    return nil, 'Watching', nil
  end

  def check_status
    return STATUS_FAILED, 'Canceled', nil if must_cancel?
    new_ids = list_event_ids.reject { |event_id| @past[event_id] }   # your code
    return nil, "No event at #{Time.now}", 10 if new_ids.empty?
    new_ids.each { |event_id| @past[event_id] = true }
    persist_triggers(@past)
    @outputs = { 'events' => new_ids }
    return STATUS_COMPLETE, "#{new_ids.size} events", nil
  end

  def cancel
    @is_canceled = true
    return true
  end
end
```

5.5.4 Plugin timeouts

Timeouts gives the values of the timeout of a step and their effect. When the value on the step is blank, the method `timeout` of the plugin gives it, in seconds.

- The timeout applies to each call of `execute` and of `check_status`, not to the whole duration of an asynchronous step. An asynchronous step can wait longer, as long as each call returns in time.
- Each call of `report_progress` restarts a positive timeout.
- When the timeout expires, the call is interrupted.
- The method `timeout` is called when the step starts, possibly before `@inputs` is set: handle `@inputs` nil.

5.5.5 Progress

`report_progress(status, details, percent = nil)` updates the status details of the step during `execute`, and restarts the timeout. `status` is `nil` (unchanged), `STATUS_INPROGRESS` or `STATUS_PAUSED`. A final status ends the execution with that status.

Write logs with `Rails.logger.info`, `Rails.logger.error`: they go to `/opt/aspera/orchestrator/log/production.log`.

5.5.6 Pause, resume, cancel, rollback

A step can be paused, resumed, canceled or rolled back from the work order page if the plugin class itself defines the method `pause`, `resume`, `cancel` or `rollback` (`pausable?` and the like check that the method is defined in the class, not inherited). These methods are called in another process (the web server), on a copy of the plugin object restored from its persisted state: they cannot change the running `execute`.

By default (`cancel_on_request?` and the like return `false`), the request is a flag that the plugin must check:

- Cancel: the step shows `Canceling`. `execute`, in its loop, or `check_status` checks `must_cancel?`, and returns `STATUS_FAILED`.
- Pause: the step shows `Pausing`. The plugin checks `must_pause?`, reports `report_progress(STATUS_PAUSED, ...)`, and waits while `must_pause?` is `true`. Resume clears the flag: `must_pause?` returns `false`.

If `cancel_on_request?` returns `true`, Orchestrator calls `cancel` at once and ends the step with `Failed`, details `Canceled at <TIME>`: use it when the operation can be stopped from outside, for example by an API call to a remote job.

The same applies to `pause_on_request?` and `resume_on_request?`.

`rollback` is called on a step that has ended, to undo its effect.

`recover` is called when a worker finds a synchronous step still `In Progress`, for example after a restart of the worker during `execute`. It returns `status, details, outputs` like `execute`. The default returns `Error`, `Recovery after partial execution is not supported`.

`HelloWorld` (`hello_worlds`) implements all of them.

5.5.7 Helpers

Method	Content
`report_progress(status, details, percent)`	See Progress.
`must_cancel?`, `must_pause?`	`true` if a cancel or a pause is requested.
`runtime_basedir`	Folder for runtime files of the plugin: `<RUN_DIR>/<FOLDER>`.
`persist_state_file(prefix, suffix, object)`, `retrieve_state_file(prefix, suffix)`	Save and read an object for this work step.
`action_dir`	Load folder of the plugin.
`state_id`, `work_order_id`	Ids of the work step and of the work order.
`default_get`, `<ATTRIBUTE>_get`, `default_inputs_spec`	See Inputs from attributes.

Modules to include for common integrations:

Module	Content
`ModuleTriggerTools`	Persistence of past events, see Triggers.
`ModuleSSHTools`	Commands on a remote node with SSH: `remote_execute_and_close!(remote_node, command_line)`, `initialize_connection`, `remote_execute`.
`ModuleSoapTools`	SOAP clients from a WSDL: `savon_client(wsdl_uri)`, `list_services`, `list_parameters`.

5.5.8 Dependencies

A template that refers to other entities declares them with the instance method `dependencies`: a list of hashes `{entity:, id_key:, id_value:, dependent_field:}`.

```
def dependencies
  return [] if remote_node.blank?
  return [{ entity: 'RemoteNode', id_key: 'name', id_value: remote_node, dependent_field:
   ↪  'remote_node' }]
end
```


They are written in exported workflow files, and the remote nodes (`RemoteNode`) and sub-workflows (`Workflow`) are added to `.wkf` packages exported with dependencies. 73 shipped plugins declare a `RemoteNode`.

5.6 Template form

`edit.html.erb` is the form of a template: Orchestrator renders it to create, edit and display templates, in the template lists and in the step properties of the designer.

5.6.1 Rendering

`edit.html.erb` is an ERB view of Rails, rendered in a modal dialog, inside a list `<ul class="horizontal_form">`, between the title and the buttons provided by Orchestrator (Save or Update, Cancel, Revision log). It is read from the load folder.

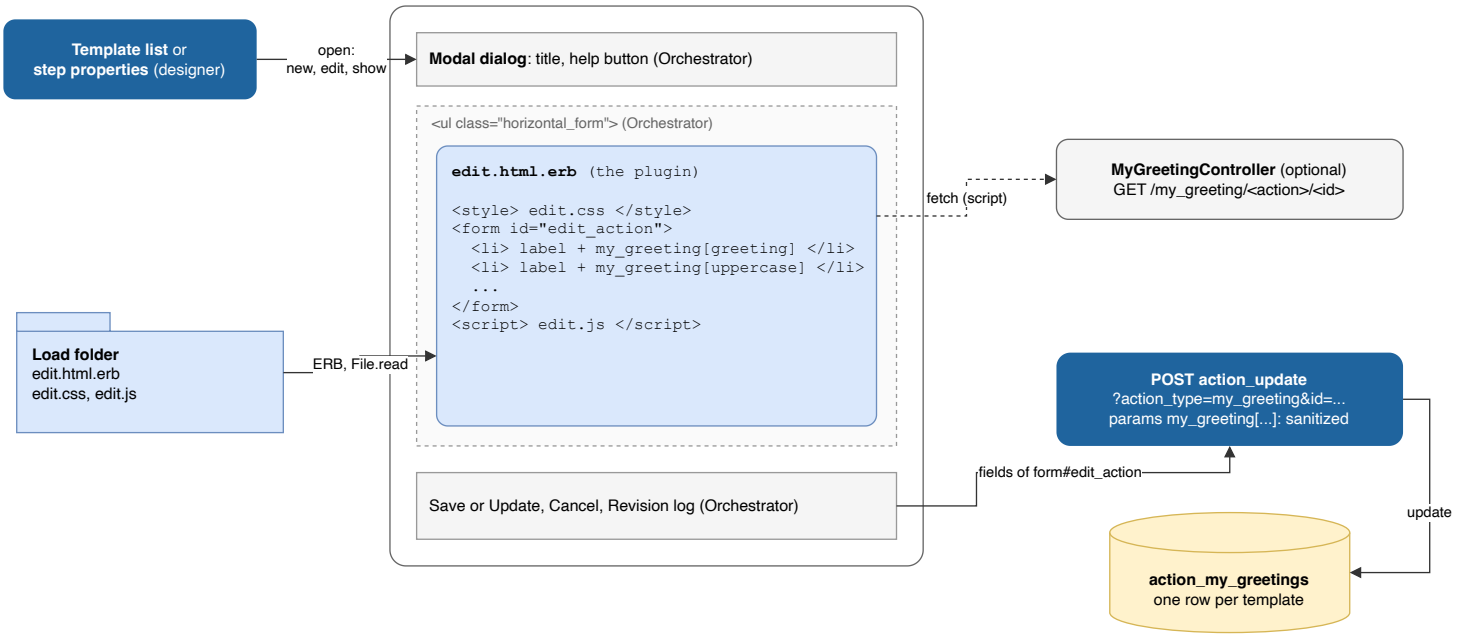

Template form: rendering and saving

Variables:

Variable	Content
`@<SNAKE_CASE_CLASS>`, `@action`	The template, for example `@my_greeting`. A new, unsaved one for a new template.
`@view`	`new`, `edit` or `show` (read only: all fields are disabled).
`@action_type`	The class name.
`@workflow`	Id of the workflow when the template belongs to a workflow (embedded template), else `nil`.

Rules:

- One form, built with `form_with model: @<SNAKE>, url: action_update_path(action_type: "<SNAKE>", id: @<SNAKE>.id), id: "edit_action"`. The id `edit_action` is required: the buttons of the dialog send the fields of the form with this id.
- One `<li>` per field, with `f.label` and the field. A `<p class="input_help">` under a field gives help.
- Field names are `<SNAKE>[<ATTRIBUTE>]`, as made by the form helpers (`f.text_field :greeting`): each one must be a column of the table.
- In an embedded template, Orchestrator disables the name field (`#<SNAKE>_name`).

Form helpers used by the shipped plugins: `f.text_field`, `f.text_area`, `f.check_box`, `f.select`, `f.number_field`, `f.password_field`, `f.hidden_field`.

5.6.2 Saved values

The buttons send the fields with JavaScript, and Orchestrator saves the template with all the values received (`update`):

- Fields without a `name`, and buttons, are not saved.
- Disabled fields are sent too.
- When creating a template, every field of the form is sent, whatever its state: use `f.check_box` (it adds a hidden field `0`), and use `f.select` instead of radio buttons, whose values would all be sent. A multiple select sends only its first value: keep a list in a hidden field (for example as JSON) updated by your script.
- Text values containing HTML tags are sanitized (`script`, `iframe`, `object`, `embed`, `svg`, `math` removed, `on*` attributes and `javascript:` links removed), except for attributes whose name ends with `_code`, `_condition` or `_payload`, and attributes listed in the constant `SKIP_SANITIZATION_FIELDS` of the plugin class.

- Passwords: `f.password_field` does not display the stored value. An empty value keeps the stored password only for these attribute names: `password`, `passphrase`, `token`, `apikey`, `node_password`, `node_secret`, `remote_password`, `remote_passphrase`, `remote_node_passwd`, `user_password`, `database_password`, `basic_auth_password`, `http_basic_auth_password`, `origin_password`, `queue_password`, `mediator_password`, `execution_password`, `serving_ssh_password`, `initiating_ssh_password`, `aoc_client_secret`, `files_client_secret`, `oapi_secret`, `console_db_password`, `mq_trust_store_password`, `mq_user_password`. For any other name, saving the form with the field empty erases the password: name secret attributes with one of these names. A request parameter `clear_<ATTRIBUTE>=true` erases it.
- HTML5 validation attributes (`required`, `min`, `pattern`) are displayed by the browser, but do not prevent saving: the buttons do not submit the form. Check values in `validate_inputs`, and show warnings with your script.

5.6.3 Custom HTML, CSS and JavaScript

The form can contain any HTML5, CSS and JavaScript:

- Orchestrator 4.1.6 sets no Content Security Policy: inline `<style>` and `<script>` elements work.
- Put CSS and JavaScript in files of the plugin folder, and include their content in `edit.html.erb`, as in the Quick start:

```
<style><%= raw File.read(File.join(@action.action_dir, 'edit.css')) %></style>
<script><%= raw File.read(File.join(@action.action_dir, 'edit.js')) %></script>
```

  These files are not ERB templates: `<%=` in them is kept as is.
- In a `<script>` or `<style>` written in `edit.html.erb`, ERB is evaluated: write `<%%=` for a literal `<%=`, and pass server values with `<%= raw value.to_json %>`.
- The shipped plugins include files of Orchestrator (`stylesheet_link_tag 'actions/<FOLDER>_edit'`, `javascript_include_tag 'actions/<FOLDER>_edit'`): they are in the asset pipeline of Orchestrator (`app/assets`), compiled at installation. A custom plugin cannot add files there.
- The form is loaded into a page that is already displayed: `DOMContentLoaded` has already fired (a jQuery `ready` callback runs at once), and the script runs again each time the dialog opens, in the same page. Keep variables inside a function (`(function () { ... })();`): a top-level `let`, `const` or `class` can fail when the dialog opens a second time.
- Find elements from the form: `document.getElementById('edit_action')`. Fields have ids `<SNAKE>_<ATTRIBUTE>` (`my_greeting_greeting`); prefix the ids of your elements with the plugin name.
- A `<button>` must have `type="button"`: without it, it submits the form and leaves the page.
- In `show` view, the dialog disables all fields after rendering: the script still runs.
- Libraries already loaded by the pages that open the form: jQuery 3.7.1 (`jQuery`), jQuery UI 1.14.1, Bootstrap 5.3.3 (`bootstrap`), select2.

5.6.4 Server data for the form

To fill the form with data from the server or from an external system (lists of profiles, of folders), add a controller to the plugin: file `<NAME>_controller.rb`, class `<CLASS>Controller < ApplicationController`. Orchestrator routes `GET <WEB_ROOT>/<NAME>/<ACTION>[/<ID>]` to the method `<ACTION>` of `<CLASS>Controller` (routes `:controller/:action/:id`, `GET` only), with the session of the user.

```
class MyGreetingController < ApplicationController
  def list_profiles
    render json: ['default', 'fast']
  end
end
```

```
fetch('/aspera/orchestrator/my_greeting/list_profiles/0').then(function (r) { return r.json();
↪  }).then(function (list) { ... });
```


In `edit.html.erb`, write the URL with `<%= Rails.configuration.web_root %>/my_greeting/list_profiles/0`. `CerifyFileVerification` (`cerify_file_verifications`) is an example.

5.6.5 Help page

`help.html.erb` is the help page of the plugin, opened by the help button of the template dialog. It is an ERB view, read from the stock folder (`/opt/aspera/orchestrator/actions/<FOLDER>/help.html.erb`). The help topics also show `:description` of `metadata.yml`.

5.7 Plugin installation and updates

5.7.1 Installing a plugin

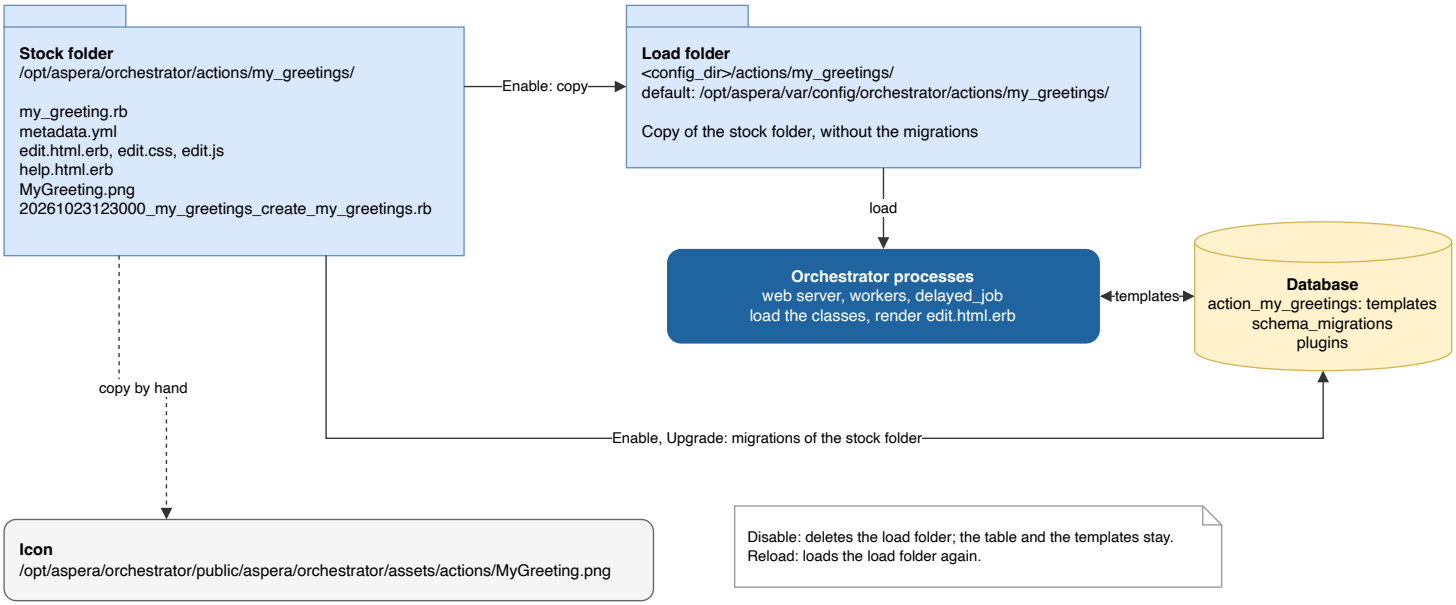

Folders of a plugin, and what Enable does

1. Copy the plugin folder to the stock folder `/opt/aspera/orchestrator/actions/<FOLDER>`, owned by `aspweb`.
2. Copy the icon to `/opt/aspera/orchestrator/public/aspera/orchestrator/assets/actions/<CLASS>.png`, owned by `aspweb`. Upgrades of Orchestrator copy the icons of the stock folders there (`rake actions:refresh_icons`); until then, a new plugin has the generic icon.
3. Open the Plugins page: it lists the stock folders, and adds the new plugin, disabled.
4. Click Enable. A background job (`delayed_job`):
   - Copies the stock folder to the load folder `<CONFIG_DIR>/actions/<FOLDER>`, and moves the migration files out of the copy.
   - Runs the migrations of the stock folder (see Migrations).
   - Loads the classes, records the plugin as loaded, and creates the default template `<CLASS> Default`.
   - Tells the web server and the workers to load the plugin.
5. Restart the web server, `systemctl restart orchestrator_server` (or `orchestrator restart` for all services), before importing a workflow file that uses the plugin. Each process caches the list of plugins allowed in imported YAML files on first use (`SafeYaml`): otherwise the import fails with `Tried to load unspecified class: <CLASS>`.

Without the Plugins page, the same as user `aspweb`, in `/opt/aspera/orchestrator`:

```
sudo -u aspweb env PATH=<RUBY_BIN_FOLDER>:/usr/bin:/bin RAILS_ENV=production bin/rails runner \
  'Plugin.load_available_plugins; Plugin.deferred_load_plugins(Plugin.where(action_type:
↪  "MyGreeting", is_loaded: false).pluck(:id))'
```

where `<RUBY_BIN_FOLDER>` is the one of the service, given by `systemctl cat orchestrator_server`. The result of the job is in `log/production.log`: `Migrating to <MIGRATION_CLASS>`, `Initiating install of plugin`

`<CLASS>`, then `Worker <N> reloading plugin <CLASS>`.

5.7.2 Plugin importing and exporting

The Import Plugin button of the Plugins page installs a plugin from a file `<CLASS>_<VERSION>.plugin` (at most 50 MB): a `tar.gz` archive of the plugin folder.

```
tar -czf MyGreeting_1.0.0.plugin my_greetings
```

Imported plugins are stored in `/opt/aspera/orchestrator/actions_imported/<FOLDER>/<N>/`, and enabled like stock plugins. Export and the backups made at upgrade (`<ARCHIVE_DIR>/action_backups`, see Server folders) produce the same format.

5.7.3 Updating a plugin

Change	Do
Code, form or help, same version	Edit the stock folder, then Disable and Enable the plugin: Enable copies the stock folder again.
New version	Edit the stock folder, add a revision to `metadata.yml`, and add migrations for new columns. The Plugins page shows Upgrade: it saves the current version to `<ARCHIVE_DIR>/action_backups/<CLASS>_<VERSION>.plugin`, copies the stock folder and runs the new migrations.
Quick test of a code change	Edit the load folder, then Reload: it loads the code of the load folder again, without copying the stock folder. The change is lost at the next Enable or Upgrade.

Disable removes the load folder and unloads the classes. The table and the templates are kept, and workflows that use the plugin cannot run until it is enabled again. Orchestrator has no function to drop the table of a plugin.

The REST API reloads enabled plugins: `GET api/reload_plugin?action_type=<CLASS>` (all plugins without `action_type`), `POST api/reload_plugin_set` with `{"plugin_set": ["<CLASS>", ...]}` and `format=json`. `GET api/plugin_version/<CLASS>` returns the version of a plugin.

5.7.4 Gems and external tools

A plugin can require gems:

- Write them in a file `Gemfile` of the plugin folder, one `gem` line each (`gem 'aws-sdk', '~> 2.11'`). The `Gemfile` of Orchestrator evaluates the `gem` lines of `actions/*/Gemfile`: other lines (`source`) are ignored.
- Gems are not installed when the plugin is enabled: run `bundle install` in `/opt/aspera/orchestrator`, then restart Orchestrator (see Adding a gem to Orchestrator).
- 34 shipped plugins have a `Gemfile`.

Programs used by the plugin (for example `ffmpeg`, `python3`) are declared in `:external_dependencies` of `metadata.yml`: Enable checks that they exist.

5.8 Plugin testing and debugging

For the log, see Testing and debugging.

- Check the inputs and outputs of a plugin without a server, with the probe of the repository `aspera-orchestrator-plugins-doc`: `ruby lib/plugin_probe.rb <PLUGINS_FOLDER> build/<VERSION>/src/lib` prints, as JSON, the fields of the form, the inputs and outputs for several template settings, and the errors. It needs the library files extracted by `rake extract_rpm`.
- On the server, open a template and click Test template: the action tester runs it with the input values you give.
- Run it in a workflow: see the Workflow authoring chapter, for example with `ascli orchestrator workflows start <ID> @json:'{"who":"Laurent"}'`.

Symptom	Cause
The plugin is not in the Plugins page.	The folder name is not the `tableize` of the class, `metadata.yml` is missing or invalid, or no version of the plugin fits this Orchestrator version (`:minimum_server_version`, `:maximum_server_version`, `:is_beta`).
Enable fails: `External dependency <PROGRAM> not found`.	A program of `:external_dependencies` is not in the `PATH`.
Enable succeeds, but the log shows `Table '...' doesn't exist` and there is no default template.	The version of the migration is already used by another migration, or the migration does not create `action_<FOLDER>`.
Import of a workflow fails: `Tried to load unspecified class: <CLASS>`.	The web server was started before the plugin was enabled: restart it.
The step ends with `Error`, `Invalid inputs: Input <NAME> expected, but not found`.	A required input is not mapped in the step, or the template changed after the workflow was published.
The step ends with `Failed`, `Timed Out at <TIME>`.	A call of `execute` or `check_status` lasted longer than the timeout without `report_progress`.
An asynchronous step loses a value between `execute` and `check_status`.	The value is not in an instance variable, or is not serializable with `Marshal`.
Save in the template dialog does nothing, or leaves the page.	The form has no id `edit_action`, or a `<button>` has no `type="button"`.
A password is erased after editing the template.	Its attribute name is not in the list of Saved values.
The plugin has the generic icon.	The icon is not in the public folder (step 2 of Installing a plugin).

5.9 Plugin security

The rules for inputs are in Security.

- Template attributes are stored in clear in the plugin table, except where the plugin encrypts them (`OrchCipher.encrypt`, `OrchCipher.decrypt`).
- Code entered in templates (for example `CustomRuby`) runs with the rights of Orchestrator.
- Do not put secrets in the plugin files or in `metadata.yml`.
- Do not expect secrets in template attributes: they are stored in clear in the plugin table, and written in clear in exported workflows. Read secrets from inputs of type `pwd`, fed by Password parameters, from remote nodes (`login`, `password`, `certificate_passphrase`), or from secret references (see Secret references).
- The saved state of an asynchronous step contains its inputs in clear, see Asynchronous execution.

5.10 Plugin checklist

1. Choose the class name, and check `"<CLASS>".tableize.classify == "<CLASS>"`.
2. Create the folder `<FOLDER>` with `<FOLDER_SINGULAR>.rb`, `metadata.yml`, one migration and `edit.html.erb`.
3. Give the migration a version not used by any other migration: the current date and time.
4. Write `self.version` as in the Quick start, `category`, `inputs_spec`, `outputs_spec` and `execute`.
5. Prefer `default_inputs_spec` and `<ATTRIBUTE>_get`, with constants `VAR_` and `DEFAULT_`.
6. Return a final status and the outputs from `execute`; for a long wait, use asynchronous execution, and set `@outputs` before the final status of `check_status`.
7. Build the form with `form_with ... id: "edit_action"`, one `<li>` per attribute; keep CSS and JavaScript in files of the folder.
8. Check with `lib/plugin_probe.rb`, install, enable, restart the web server, run in a workflow.

5.11 Plugin annex

5.11.1 Extending Orchestrator from a plugin

A plugin can change the behavior of Orchestrator for all steps, for example to read the inputs of every step from another source. Orchestrator has no extension point for that: the plugin changes core methods when its files are loaded. Such a plugin depends on the code of one Orchestrator version.

The plugin `SecretReference` of repository `aspera-orchestrator-secret-reference` is an example: it replaces references `secret://...` in inputs and template attributes by secrets read from HashiCorp Vault, see Secret references.

Rules:

- Support file loaded first: files are loaded shortest path first, so a support file with a shorter name than the main file (`secret_core.rb` before `secret_reference.rb`) installs the changes before the class is defined.
- Zeitwerk names: at boot, Rails eager loads each load folder with Zeitwerk, so the support file must define the constant of its name (`SecretCore` in `secret_core.rb`). A folder whose name is not a constant name (`vendor/aspera-cli`) stops the boot: `wrong constant name Aspera-cli`.
- Library in a hidden folder: Zeitwerk ignores hidden folders, and `Plugin.load_plugin` loads only `[A-Za-z]*.rb` of the folder itself. Copy the library and its gems into `.vendor` of the plugin folder, and add their `lib` folders to `$LOAD_PATH` from the support file: no `bundle install`. The runtime dependencies of these gems must be satisfied by the gems of Orchestrator, at their versions (see `Gemfile.lock`). Enable copies the folder with its subfolders, and the plugin file (`tar.gz`) keeps them.
- Change with `prepend`: prepend a module whose methods call `super` to the class or module of Orchestrator (`ActionTools.prepend(Hook)`, `ActionTools.singleton_class.prepend(Hook)` for a class method). A module prepended to a module, such as `ActionTools`, also applies to classes that included it before.
- Once per process: a file is loaded by Zeitwerk at boot, then again with `load` by Enable, Reload and the reload of plugins by workers (`Engine.reload_plugin`). Install the changes once per process (a flag in the support module). Each service (web server, engine, workers) loads the plugin, so each one installs the changes.
- Disabled plugin: Disable unloads only the constants under the name of the plugin class (`Plugin.unload_plugin_classes`): the support module and the prepended modules stay in memory. Each changed method checks that the plugin is enabled (`Object.const_defined?(:SecretReference)`), and else only calls `super`.
- Versions: set `:minimum_server_version` and `:maximum_server_version` of `metadata.yml` to the version you tested. Before installing the changes, check the parameters of each changed method (`ActionTools.instance_method(:assign_inputs).parameters`): if one differs, install nothing, and log it.
- Upgrade: code already loaded (the library) is not loaded again: restart Orchestrator after Upgrade (`orchestrator restart`).

5.11.2 Patterns in the shipped plugins

Counts in the 205 plugins of Orchestrator 4.1.6:

Pattern	Plugins
`self.version` from `metadata.yml` with `@@plugin_version_loaded`	205
`default_get` or `<ATTRIBUTE>_get`	203
`Rails.logger`	192
`DEFAULT_` constants	188
`default_inputs_spec`	186
`VAR_` constants	149
`self.display_name`	100
`check_status`	92
`MultiType`	88
`dependencies` (instance method)	76
`report_progress`	69
`cancel`	59
`timeout`	49
`Payload.expand`	47

Pattern	Plugins
`must_cancel?`	43
`validate_inputs`	41
`Payload.variables`	41
`multiple_execution?`	38
`pause`, `resume`	33
`Gemfile`	34
`recover`	30
`cancel_on_request?`	27
`ModuleTriggerTools`	21
Controller file	21
`<script>` in `edit.html.erb`	81
`rollback`	2

5.11.3 Adding a gem to Orchestrator

Global gem: edit `/opt/aspera/orchestrator/Gemfile`, for example add:

```
gem 'prawn'
gem 'prawn-table'
```

Plugin gem: add the `gem` lines to `/opt/aspera/orchestrator/actions/<FOLDER>/Gemfile`.

Then:

```
cd /opt/aspera/orchestrator/
bundle install
orchestrator restart
```

Chapter 6

Portlet development

This chapter explains how to add a widget to the Orchestrator dashboard by writing a portlet. Read it when users need a view or an action that no shipped portlet offers, or to change an existing portlet.

The shipped portlets are the best set of examples: folder `/opt/aspera/orchestrator/portlets` of an Orchestrator server, one folder per portlet. `orchestrator_information` is the simplest, `user_tasks` has parameters and a permission check, `csv_editor` has uploads, a modal dialog and several actions, `queue_management` has pagination and `helper_method`.

The repository `aspera-orchestrator-secret-reference` contains the portlet `secret_dashboard` as a worked example: it uses a plugin (`SecretCore`), has four sections with AJAX actions, an admin-only check in every action, and a full RSpec test suite that runs outside Rails with stubs of `Portlet`, `PortletsController`, `Workflow`, `WorkStep` and `User`.

6.1 Portlet quick start

The following portlet `hello_banner` shows a greeting with the time, and the most recent work orders. It has four parameters (`greeting`, `uppercase`, `max_orders`, `refresh`), a configuration partial, and one action (`ping`) called with `ajaxUpdate`.

6.1.1 Portlet source

```
hello_banner/
├── hello_banner.rb        class HelloBanner and class HelloBannerController
├── hello_banner.erb       main view
├── _hello_banner.erb      configuration partial
└── metadata.yml           version history
```

`hello_banner.rb`:

```ruby
# Shows a message, optionally in upper case, with a counter of work orders.
class HelloBanner < Portlet
  after_initialize :set_portlet_name_and_desc
  before_save      :set_portlet_name_and_desc
  def set_portlet_name_and_desc
    self.name = "Hello banner"
    self.description = "Example portlet of the Aspera Orchestrator Development Guide."
  end

  def parameters_spec
    return {
      "refresh" => TYPE_INT,
      "greeting" => TYPE_STRING,
      "uppercase" => TYPE_FLAG,
      "max_orders" => TYPE_INT
    }
  end
```

```
  def defaulted_parameters
    return { "refresh" => 60, "greeting" => "Hello", "uppercase" => false, "max_orders" => 5 }
  end

  def message
    text = "#{greeting}, #{Time.now.utc.strftime('%H:%M:%S')} UTC"
    return uppercase ? text.upcase : text
  end

  def recent_orders
    return WorkOrder.order(initiate_date: :desc).limit(max_orders).to_a
  end
end

class HelloBannerController < PortletsController
  def ping
    render plain: "pong #{@portlet.greeting} from frame #{@frame_id}"
  end
end
```

`hello_banner.erb`:

```
<main class="container-fluid" aria-labelledby="hello_banner-heading">
  <h4 class="page_title" id="hello_banner-heading"><%= h @portlet.message %></h4>
  <table class="table table-condensed">
    <% @portlet.recent_orders.each do |order| %>
      <tr><td><%= h order.name %></td><td><%= h order.status %></td></tr>
    <% end %>
  </table>
  <a href="#" onclick="ajaxUpdate('<%= raw portlet_action_path(portlet: "hello_banner",
   ↪  portlet_action: "ping", frame_id: @frame_id, frame_html_id: @frame_html_id) %>', 'GET', {
   ↪  target_id: '#<%= @frame_html_id %> #hello_ping' }); return false">Ping</a>
  <span id="hello_ping"></span>
</main>
```

`_hello_banner.erb`:

```
<li>
  <label>Greeting</label>
  <input type="text" <%= portlet_input_name_and_value(@portlet, :greeting) %> <%= style_long %>/>
</li>
<%= draw_portlet_flag_list_element("uppercase", "Upper case") %>
<li>
  <label>Orders shown</label>
  <input type="text" <%= portlet_input_name_and_value(@portlet, :max_orders) %> <%= style_short %>/>
</li>
<li>
  <label>Refresh rate</label>
  <input type="text" <%= portlet_input_name_and_value(@portlet, :refresh) %> <%= style_short %>/>
</li>
```

`metadata.yml`:

```
---
:revision_history:
  - :author: "<AUTHOR>"
    :change_description: Initial release
    :version: 1.0.0
    :date: "2026-10-30"
    :minimum_server_version: 4.1.0
```

6.1.2 Portlet install and run

1. Pack the folder as `hello_banner.portlet`: `tar -czf hello_banner.portlet hello_banner`. The file name must be exactly `<ID>.portlet` (see Importing and exporting).

2. In the web interface, open Engine > Portlets, click Import Portlet, and select the file. Alternatively, copy the folder to `/opt/aspera/var/config/orchestrator/portlets/hello_banner` and use the slider of the portlet.
3. Enable the portlet with its slider, if the import did not already do so.
4. Open Dashboard, select a frame, choose Hello banner in Choose Portlet, set the parameters, and click Save Configuration.

A code change in an existing portlet needs a restart of the web server, `systemctl restart orchestrator_server`, see Updating a portlet.

6.2 Portlet folder

6.2.1 Portlet names

Item	Rule	Example
Folder	Portlet ID, snake_case.	`hello_banner`
Main file	`<ID>.rb` in the folder. This exact name is loaded.	`hello_banner.rb`
Class	`id.camelize`, a subclass of `Portlet`.	`HelloBanner`
Controller class	`<CLASS>Controller`, a subclass of `PortletsController`, optional.	`HelloBannerController`
Main view	`<ID>.erb`	`hello_banner.erb`
Configuration partial	`_<ID>.erb`	`_hello_banner.erb`

Rules:

- The class is looked up with `Object.const_get(id.camelize)`. Orchestrator does not use `tableize` or `classify` for portlets, but the inflections of `config/initializers/inflections.rb` (for example `SSH`, `CGI`) still apply to `camelize`. Avoid an acronym in the ID.
- If the class is not defined after loading `<ID>.rb`, enabling fails with "definition of the portlet is missing".
- `portlet_id` of a new object is `self.class.name` without a trailing `Portlet`, in snake_case, and `Portlet.generate` sets it to the folder name anyway. Do not override it: the class name must be `id.camelize` in all cases.
- A portlet ID must not collide with a class of Orchestrator. Do not name a portlet `User` or `Workflow`.
- The name (`self.name`) must be unique among portlets: Choose Portlet sends the name, and `Frame#select` finds the portlet with `Portlet.find_by(name:)`. The REST call `api/portlet_version` also takes the name.

6.2.2 Portlet files

File	Required	Content
`<ID>.rb`	Yes	The model class. The controller class can be in the same file.
`<ID>.erb`	Yes	The view displayed in the frame. Rendered as `<ID>/<ID>` with layout `individual_portlet`.
`_<ID>.erb`	Yes	The configuration partial: `<li>` elements shown in the configuration form of the frame. For a portlet with no setting, create an empty file: without it, choosing the portlet in a frame and Save Configuration fail with HTTP 500 (Missing partial).
`metadata.yml`	Recommended	The version history. Read by `Portlet.version` only.
`_*.erb`, `*.js`, `*.css`, images	No	Other partials, rendered as `<ID>/<PARTIAL>`.

There is no migration, no icon and no help page: a portlet has no table of its own.

6.2.3 Portlet metadata file

`metadata.yml` is a YAML file whose keys are symbols:

```yaml
---
:revision_history:
  - :author: "<AUTHOR>"
    :change_description: Initial release
    :version: 1.0.0
    :date: "2026-10-30"
    :minimum_server_version: 4.1.0
```

Key	Meaning
`:version`	`major.minor.revision`, optionally `.patch`.
`:change_description`, `:author`, `:date`	Free text.
`:minimum_server_version`, `:maximum_server_version`	Informational.

Limits of 4.1.6:

- `Portlet.version` reads the file, sorts the entries and returns the highest version as `[major, minor, revision, patch]`. It is used only by the REST call `GET api/portlet_version` (see Known issues).
- The server version is not checked for portlets, whereas it is for plugins. A portlet is enabled even if `:minimum_server_version` is higher than the server.
- A missing `metadata.yml` does not prevent enabling; only a call to `.version` raises `Errno::ENOENT`.

6.3 Portlet class

6.3.1 Portlet structure

```ruby
class MyPortlet < Portlet
  after_initialize :set_portlet_name_and_desc
  before_save      :set_portlet_name_and_desc
  def set_portlet_name_and_desc
    self.name = "My portlet"
    self.description = "What it shows."
  end

  def parameters_spec;      { "refresh" => TYPE_INT }; end
  def defaulted_parameters; { "refresh" => 60 };       end
end
```

`Portlet` is an Active Record model of table `portlets` (columns `name`, `description`, `active`, `install_source`, `portlet_id`, `parameters`, timestamps). All portlets share this table; there is no single-table inheritance.

6.3.2 Portlet methods

Method	Required	Role
`set_portlet_name_and_desc`	Yes	Assigns `self.name` and `self.description`. Called by the two callbacks.
`parameters_spec`	No	Hash `name => TYPE_*`. Default: `{}`.
`defaulted_parameters`	No	Hash `name => default value`. Default: `{}`.
`view_template`	No	Template rendered by `PortletsController#view`. Default: `<ID>/<ID>`.
`url`, `generic_url`	No	Do not override. `Frame#select` reads `url` on the plain `Portlet` record returned by `Portlet.find_by(name:)`, not on your class, so an override has no effect.
`portlet_id`	No	Do not override. Default: class name without `Portlet` suffix, underscored.

Name and description must be literal strings: for a portlet that is not yet enabled, the page Engine > Portlets reads

them with a regular expression on the lines `self.name = ...` and `self.description = ...`, removes the quotes and a trailing comment, and does not evaluate Ruby. A computed name is shown as raw text there.

6.3.3 Portlet types

Constant	Value in a view	Conversion rule
`TYPE_STRING`	String	None.
`TYPE_INT`	Integer	`String#to_i`: `abc` gives `0`, `12abc` gives `12`.
`TYPE_FLAG`	`true`, `false` or `nil`	`true` only for the text `true` (any case). `1`, `on` and `yes` give `false`. A default of `false` gives `nil` (see below).
`TYPE_DATE`	`DateTime`	`DateTime.parse`; `nil` if the text cannot be parsed.
`TYPE_HASH`	Hash	Edited with `draw_variables_hash` / `script_for_variables_hash`.

The conversion is done by `MultiType.convert_value`. A parameter that is not in `parameters_spec` is still stored, as a raw string.

6.3.4 Runtime values

`Portlet.generate(id, params, frame_id)` creates the object and calls `set_runtime_values(params)`:

1. Start from `defaulted_parameters`.
2. A parameter in the request replaces its default only if it is not blank: a blank field keeps the default.
3. Convert each value with its type in `parameters_spec`.

A parameter with no default and no value is `nil`. `id`, `frame_id`, `frame_html_id` and every other URL parameter also become runtime values.

Reading a value: call the name as a method (`greeting`), or `runtime_value('greeting')`. `method_missing` looks, in order, at runtime values, instance variables, database attributes, then the keys of `parameters_spec` (giving `nil`). Anything else raises `NoMethodError`.

Gotchas:

- Database columns win. A parameter named `name`, `description`, `active` or `parameters` is hidden by the column: read it with `runtime_value('name')`, and prefer another name. Likewise `@portlet.id` is the row ID, not the URL parameter `id` (the portlet ID).
- A default value of `false` or `nil` gives the runtime value `nil`, because `set_runtime_value` keeps only values that are truthy. Test a flag with `if uppercase`, never with `== false`.
- `frame_id` is an `attr_accessor`, and `Portlet.generate` does not set it in `view` and `portlet_action`: use `@frame_id` in views and actions.
- `input_field(name)` returns `"__<NAME>"`, the name of the form field for a parameter.

6.3.5 Parameter `refresh`

All 23 shipped portlets have a parameter `refresh` (seconds) in `defaulted_parameters`; 19 also declare it in `parameters_spec` as `TYPE_INT`. Declare it in both. With a value above `0` and no sub-frame, the dashboard reloads the frame periodically while the page is visible. `-1` or `0` disables it. The layout `individual_portlet` shows ”Last refreshed at” when `refresh` is set and is `0` or more. If `refresh` is not in the link of the frame, the frame uses `defaulted_parameters['refresh']`.

6.4 Views and actions

6.4.1 Display in a frame

How a portlet is shown:

1. A user opens a frame in Dashboard and selects a portlet in Choose Portlet, which sends the portlet name. `Frame#select` finds the row by name and stores `portlet_name`, `portlet_id`, `link = portlets/view?id=<ID>` and `configuration_link = <PORTLET_FOLDER>/<ID>`, for example `.../portlets/hello_banner/hello_banner`.
2. Save Configuration stores `link_parameters` (a Ruby hash as text, for example `{"greeting" => "Bonjour", "uppercase" => "true"}`) and appends `&<NAME>=<%= CGI::escape(<NAME>) %>` to the link for each saved parameter.
3. The page requests `FramesController#display`, which redirects to the expanded URL, with `frame_id` and `frame_html_id`, for example `portlets/view?id=hello_banner&greeting=Bonjour&uppercase=true&max_orders=3&refresh=30&frame_id=2&frame_html_id=dashboard_2`.
4. `PortletsController#view` merges `params` and `link_parameters`, calls `Portlet.generate`, and renders `view_template` in layout `individual_portlet`.
5. If `refresh` is above `0`, `FramesDisplay.loadSubframe` calls `startAjaxAutoUpdates` to reload the frame.

Errors render a small HTML message: ”Undefined portlet” if the ID is unknown, ”Error displaying portlet” if the view raises. The ”Choose Portlet” list contains the enabled portlets; for a non-administrator, only those with permission `run` (see Permissions). A dashboard can be exported and imported as YAML (`*_dashboardpage.yml`), assigned to users or groups, and ranked.

6.4.2 Main view

`<ID>.erb` is rendered inside the layout `individual_portlet`, which is loaded into the frame. Variables available:

Variable	Content
`@portlet`	The portlet object, with its runtime values.
`@session_user`	The ID of the logged-in user.
`@portlet_id`, `@portlet_name`	ID and name.
`@frame_id`, `@frame_html_id`	The frame, and the HTML `id` of its container, for example `dashboard_2` in a dashboard page.
`@parameters`	The hash of runtime values.
`params`, `session`	As in any controller view.

Rules:

- Escape every value with `h` (or `<%= %>`, which escapes in Rails views). Work order names, user names and variables are user data.
- Put the heading in a `<main>` with `aria-labelledby` as the shipped portlets do; use the Bootstrap 5 classes `container-fluid`, `row fluid-margin`, `page_title`, `orch_table_basic`, `table table-condensed`.
- Several portlets are on the same page. Scope every CSS rule with `#<%= @frame_html_id %>`, and every `id` you create with a name that is unique to the portlet. Orchestrator does not rewrite CSS.
- jQuery 3.7.1, jQuery UI, Bootstrap 5, select2, SweetAlert2 and clipboard.js are already loaded by the application layout.
- 14 of the 22 shipped main views contain a `<script>` (`custom_portlet` has no main view). The script runs when the frame content is inserted.
- Check permissions in the view for data that depends on them: `check_permission({ user: @session_user }, workflow, :run)`, `authorized_workflows_selector(session[:user], ...)`, `User.admin?(session[:user])`.

6.4.3 Configuration partial

`_<ID>.erb` is rendered by the Dashboard configuration (`frames/show`) from the `configuration_link` of the frame, as partial `<ID>/<ID>`. It contains `<li>` elements. The form buttons are Save Configuration, Reset Frame and Preview.

Use the helpers of `PortletsHelper`:

Helper	Output
`portlet_input_name(portlet, name)`	`name="__<NAME>"`
`portlet_input_value(portlet, name)`	`value="..."`; when the value equals the default, it outputs `placeholder="default: X" value=""`.
`portlet_input_name_and_value(portlet, name)`	Both. Most used (29 shipped uses).
`style_short`, `style_long`	Width 120px, 320px.
`draw_portlet_text_input(...)`, `draw_portlet_text_list_element(...)`	Text input, bare or in `<li>`.
`draw_portlet_flag_input(...)`, `draw_portlet_flag_list_element(name, label)`	Check box with a hidden `false` field.
`draw_portlet_selection_input(...)`, `draw_portlet_selection_list_element(...)`	Select list.
`double_password_configurator`	Password with confirmation.
`get_label`	Label of a field.

Other usable helpers: `authorized_workflows_selector(user_id, name, opts, existing)`, `script_for_variables_hash`, `draw_variables_hash`, `check_permission`.

The form field name for parameter `p` is `__p`. `FramesController#configure` keeps the fields that match `^[0-9]*__(.*)` and stores their text in the frame as `link_parameters`; values are converted with their type at each display. A check box without the hidden field cannot be unchecked; use `draw_portlet_flag_*`.

6.4.4 JavaScript

`ajaxUpdate(url, method, options)` (file `application.js`) requests a URL and inserts the HTML response in an element:

Option	Meaning
`target_id`	jQuery selector of the element that receives the response. Prefix it with `#<%= @frame_html_id %>`.
`beforeSuccess`, `success`, `error`, `complete`	Callbacks. Without `error`, a generic error message is shown.
`morphUpdate`	Update the DOM in place instead of replacing it.

New `<link rel="stylesheet">` elements found in the response are moved to `<head>`. `portlet_to_modal(url, method)` shows the response in the modal dialog `#modal_dialog` (6 shipped uses). `xhr-define.js` adds the `X-CSRF-Token` header to every XHR request that is not a GET, so a POST must be sent by `ajaxUpdate` or by `$.ajax`. A POST without a valid token is not only rejected: Orchestrator invalidates all the sessions of the user and redirects to the logon page. A plain `<form>` POST without the `authenticity_token` field therefore logs the user out.

6.4.5 Actions

A portlet action is a public method of `<CLASS>Controller < PortletsController`, in the portlet file.

URL helper:

```
<%= raw portlet_action_path(portlet: "hello_banner", portlet_action: "ping",
      frame_id: @frame_id, frame_html_id: @frame_html_id) %>
```

It generates `GET` or `POST /aspera/orchestrator/portlet_action?portlet=<ID>&portlet_action=<METHOD>&frame_id=..&frame_html_id=..`.

`PortletsController#portlet_action`:

1. Loads the portlet, enabling it if it is defined but not loaded.
2. Merges the `link_parameters` of the frame into `params`.

3. Creates `<CLASS>Controller`, and sets `request`, `response`, `frame_id`, `frame_html_id`, `portlet`, `user` and `params`.
4. Calls `controller.process(params[:portlet_action])`, and copies the body, status, content type and headers to the response.

In the action: `@portlet`, `@frame_id`, `@frame_html_id`, `params`, `session`, `current_user`, `render plain:`, `render partial:`, `render html:`. Views are looked up as `<ID>/<PARTIAL>`. `helper_method` works (see `queue_management`). Private methods cannot be called as actions.

Orchestrator checks no permission for an action: check it in the action, see Security of actions.

6.5 Portlet installation and updates

6.5.1 Installing a portlet

Stock folder `/opt/aspera/orchestrator/portlets` is overwritten by upgrades; use the user folder.

Loading order: the user folder `<CONFIG_DIR>/portlets/<ID>` has priority over the stock folder. `Portlet.available` lists both; a user folder counts as soon as it contains a `.rb` file.

1. Put the folder in `/opt/aspera/var/config/orchestrator/portlets/<ID>`, or import `<ID>.portlet`.
2. Open Engine > Portlets (permission `engine`) and enable the portlet. Enabling runs `Portlet.attempt_load(id)`: it loads `<ID>.rb`, checks the class, and creates the row with `active = true`.
3. To enable a portlet at every start, add its ID to the OrchConfig setting `default_portlet_list` (comma-separated); `config/application.rb` loads these portlets after initialization. Setting `auto_activate_portlets` enables portlets when they are assigned to users by dashboard.

A portlet is loaded only in the web process (not in the engine or the workers). Disabling destroys the row and removes the class constant. The controller constant stays defined until restart. A disabled portlet is enabled again, with a new row, as soon as a frame displays it or calls an action on it, because `view` and `portlet_action` autoload.

6.5.2 Portlet importing and exporting

- Export (Export in the portlet list) creates `<ID>.portlet`, a gzip tar of the portlet folder.
- Import (`Portlet.uncompact`) accepts `.portlet` (a tar) or `.yml` (a custom portlet). The tar must contain the folder at the top level. The archive name, without the extension, must equal the portlet ID: `hello_banner_1.0.0.portlet` extracts the folder `hello_banner`, overwriting the files of an installed `hello_banner`, then fails to load `hello_banner_1.0.0`.
- If a portlet with the same ID exists in the stock folder, the import renames the new one to `<ID>_version_N`: the folder, the file names, the class name (by text replacement) and the name, which becomes "... (Version: N)" (only for a name in double quotes). Do not use the string of the class name in text that must not change, and do not rely on a hard-coded `portlet: "<ID>"` in views: update the renamed copy yourself.
- If the portlet exists in the user folder, the import does the same renaming, but extracts the archive over the installed folder before renaming it: the installed portlet loses its files. It keeps working until the next restart, then its frames show "Undefined portlet". Never import an archive of a portlet installed in the user folder; see Updating a portlet.
- Imports go through `<RUN_DIR>/portlet/import`, exports through `<RUN_DIR>/portlet/export`.

6.5.3 Updating a portlet

1. Replace the files in the user folder. Do not import a new archive with the same ID: it breaks the installed portlet (see Importing and exporting).
2. Increase `:version` in `metadata.yml`.
3. Restart the web server: `systemctl restart orchestrator_server` (or `orchestrator restart` for all services). In production, `enable_reloading` is `false` and `eager_load` is `true`; Orchestrator does not reload a portlet in the running process. A disable followed by an enable runs `load` again on `<ID>.rb`, so the model and the methods of the controller change, but the views stay cached until restart; it also changes the row ID and loses permissions.
4. Check the frames that use the portlet: they keep their stored parameters. A parameter removed from `parameters_spec` stays in the frame and is ignored.

6.5.4 Upgrading a legacy portlet

`script/update_portlet.rb <DIRECTORY>` upgrades a portlet written before 4.1.0:

- creates `metadata.yml` from a ”Revision history” comment;
- rewrites `def name` and `def description` into `set_portlet_name_and_desc`;
- rewrites `< ApplicationController` into `< PortletsController`;
- rewrites `AbInitio::X` into `OrchConfig.x`;
- rewrites `/portlet_action/<PORTLET>/<ACTION>` URLs into `portlet_action_path(...)`.

It skips a folder that has a `metadata.yml`, and does not scope CSS rules to the frame: do that by hand.

6.6 Portlet testing and debugging

For the log, see Testing and debugging.

- Check the syntax: `ruby -c <ID>.rb`.
- Display the portlet in a frame with Preview, before saving the configuration.
- Call an action in the browser: `/aspera/orchestrator/portlet_action?portlet=<ID>&portlet_action=<METHOD>&frame_id=1&frame_html_id=f1` (logged in).
- Call `GET /aspera/orchestrator/api/portlet_version[/<NAME>]?format=json` (or `xml`), with API credentials, to read the version of a portlet from `metadata.yml`, or of all portlets without `<NAME>`. `<NAME>` is the portlet name, URL-encoded (`Hello%20banner`), not the ID. The result is wrong in 4.1.6 (see Known issues).

Symptom	Cause
Enabling fails with ”definition of the portlet is missing”	Class name different from `id.camelize`, or file not `<ID>.rb`.
Import fails, and the files of the installed portlet changed	Archive name differs from `<ID>.portlet`.
Choosing the portlet in a frame fails (HTTP 500, ”Missing partial” in the log)	`_<ID>.erb` is missing.
After a restart, frames show ”Undefined portlet”	An archive of the same ID was imported: the folder was moved to `<ID>_version_N`.
Name in the list shows Ruby code	`self.name` is computed; use a literal string.
A parameter is always the default	The field is blank, or the name is not `__<NAME>`.
A flag is always `false`	Value is not the text `true`. Use `draw_portlet_flag_*`.
`NoMethodError` on a parameter	Not in `parameters_spec`, no default, and not in `link_parameters`.
A parameter named `name` is wrong	Shadowed by the column. Use `runtime_value('name')`.
Code change has no effect	The web server was not restarted.
Permissions disappear after disable	New row ID after enabling (see Permissions).
Styles of another portlet change	CSS not scoped by `#<%= @frame_html_id %>`.
A POST action logs the user out	CSRF token missing: use `ajaxUpdate` or `$.ajax`.
A flag is `nil` instead of `false`	Its default is `false`; test it with `if`.
User cannot select a portlet in Choose Portlet	Known issue with non-administrators.

6.6.1 Portlet known issues

Each was reproduced on a 4.1.6 server, except the regular expression on `link_parameters`, reproduced with the unmodified classes of the 4.1.6 package.

Issue	Effect	Work-around
`Portlet.version` is a class method that reads `first_or_initialize.portlet_id`.	`api/portlet_version` returns the version of the first portlet row for every portlet. On the test server, all portlets, `Hello banner` 1.0.0 and `Queue Manager` 0.0.9 included, were reported as 0.0.3, the version of `aspera_service`.	Read `metadata.yml` directly.
`Entitlement.matching_permissions` returns an array of parts and the list tests complete principals.	A non-administrator with an explicit `run` permission does not see the portlet in Choose Portlet.	Assign the portlet to the user with the administrator, through a dashboard.
Portlet controllers inherit the public methods of `PortletsController`.	`portlet_action=disable` and similar are reachable without a permission check.	Check permissions in each action; do not expose sensitive operations.
The row ID changes when a portlet is disabled and enabled.	Permissions are orphaned.	Avoid disable and enable; grant permissions again.
`.portlet` file name must equal the ID.	Import fails for names such as `<ID>_1.0.0.portlet`, after overwriting the files of an installed `<ID>`.	Rename the file.
Import of an ID present in the user folder extracts over it, then moves it to `<ID>_version_N`.	The installed portlet loses its files, and breaks at the next restart.	Update by replacing the files; do not import.
`link_parameters` is parsed with a regular expression in `portlet_action`.	`"` and `\` in a value are doubled.	Avoid these characters.
A POST without CSRF token calls `redirect_to_login`.	All sessions of the user are invalidated.	Send POST requests with `ajaxUpdate` or `$.ajax`.

6.7 Portlet security

The rules for parameters and `params` values are in Security.

- A portlet runs with the rights of the Orchestrator web process and can read the whole database. Review the code of every imported `.portlet` and `.yml` file before enabling it.
- Import requires the permission `engine`; grant it only to trusted administrators. In 4.1.6, enable, disable and export check no permission: any logged-in user can call them (see Security of actions).
- Escape all output (`h`).
- Check permissions inside each action and view; see Security of actions.
- Do not store passwords in parameters: they are saved in the frame as clear text. Use `double_password_configurator` only for values that the portlet must hold, and prefer a stored credential.
- Custom portlets run `eval`: restrict the permission `engine`.

6.7.1 Permissions

Each portlet has entitlements with principals `Aspera:Orchestrator:Portlet:<ROW_ID>:run`, `:view` and `:edit`, edited with Edit permissions in Engine > Portlets. Administrators see all portlets.

Limits of 4.1.6:

- The principal contains the database row ID, not the portlet ID. Disabling a portlet destroys the row; enabling it creates another row with another ID, and the permissions stay attached to the old one.
- `Entitlement.matching_permissions` returns the parts of the principal as an array, while the portlet list expects complete principals. As a result, a non-administrator with an explicit `run` permission does not see the portlet in Choose Portlet (see Known issues).

Do not rely on portlet permissions for confidentiality; check permissions on the data, as in Security of actions.

6.7.2 Security of actions

`<CLASS>Controller` inherits the public methods of `PortletsController`, and `portlet_action` calls any public method by name. In 4.1.6, `portlet_action=disable`, `enable`, `export`, `upload`, `import`, `revoke`, `update_permissions`, `view` and `index` are reachable through a portlet controller. Only some of them check a permission, and `disable`, `enable`, `export` and `view` check none. The same methods of `PortletsController` are also reachable directly (`POST portlets/disable`, `POST portlets/enable`, `GET portlets/export`) by any logged-in user: only the list page, Import Portlet and the upload check the permission `engine`.

Therefore:

- Orchestrator checks only that the user is logged in, the CSRF token and the host name. It never checks a permission for a portlet action.
- Check the permission in every action that reads sensitive data or changes something: `check_permission({ user: session[:user] }, workflow, :run)` or `User.admin?(session[:user])`, and respond with an error otherwise.
- Do not name an action like an existing `PortletsController` method.
- Parameters of the frame, as they reach an action, are parsed from the stored text with a regular expression. A value that contains `"` or `\` comes back with extra backslashes. Do not put such values in parameters used by an action, or read them with `@portlet.runtime_value`.

6.8 Portlet checklist

1. Choose the portlet ID (snake_case, no acronym), the class `id.camelize`, and the folder name.
2. Create `<ID>.rb`, `<ID>.erb`, `_<ID>.erb` and `metadata.yml`.
3. Set name and description in `set_portlet_name_and_desc` with literal strings, called by `after_initialize` and `before_save`.
4. Declare `refresh`, and every parameter in `parameters_spec`, with a default in `defaulted_parameters`.
5. Escape output, scope CSS with `#<%= @frame_html_id %>`, and give every `id` a unique name.
6. For an action, add `<CLASS>Controller < PortletsController`, check the permission in the action, and call it with `portlet_action_path` and `ajaxUpdate`.
7. Pack as `<ID>.portlet` (name equal to the ID), import, enable, and configure a frame. After each code change, replace the files in the user folder (do not import again) and restart the web server.

6.9 Portlet annex

6.9.1 Custom portlets

A custom portlet is defined in the web interface, with no file: Engine > Portlets > Define Custom Portlet. Portlet `custom_portlet` (stock) must be enabled first.

A definition (`custom_portlet_definitions`) has a name, a display name, a version, a description, parameters (typed), a model (Ruby) and a view (ERB, rendered inline). The model is evaluated with `eval` as methods of the portlet.

- It runs Ruby and ERB with the rights of Orchestrator. The forms Define Custom Portlet and edit require the permission `engine`, but in 4.1.6 the create, update and delete requests themselves check no permission.
- Definitions are exported as `CustomPortlet_<ID>_<VERSION>.yml` and imported in the same page. Importing an existing name increases the version and deactivates the previous one.
- IDs are `c_<N>`.

Use it for a quick prototype. Write a file portlet for anything that is kept, versioned, tested and reviewed.

6.9.2 Patterns in the shipped portlets

Counts in the 23 portlets of Orchestrator 4.1.6 (versions 0.0.2 to 0.1.2, all with `:minimum_server_version: 4.1.0`):

Pattern	Count
Occurrences of `TYPE_STRING`	44
Occurrences of `TYPE_INT`	40
Occurrences of `TYPE_FLAG`	36
Occurrences of `TYPE_DATE`	3
Occurrences of `TYPE_HASH`	3
`portlet_input_name_and_value`	29
`style_short`	28
ERB files with `<script>` (in 14 portlets)	18
`portlet_input_name`	12
Portlets with a controller	10
`portlet_to_modal`	6
`draw_portlet_*`	6
`ModuleSSHTools`	2

Shipped portlets: `aspera_service`, `assigned_tasks`, `csv_editor`, `custom_portlet`, `file_browser`, `filter_work_orders`, `inline_journals`, `load_utilization`, `lookup_editor`, `monitors_dashboard`, `orchestrator_information`, `processes_view`, `queue_management`, `resource_management`, `step_activity`, `step_performance_stats`, `step_stats`, `table_details_viewer`, `transfer_console`, `user_tasks`, `workflow_performance_stats`, `workflow_stats`, `workorder_activities`.

Chapter 7

About this guide

This chapter says how the content of each chapter was checked, for a reader who wants to know how far to rely on it.

7.1 How each chapter was verified

- Workflow development practices: the rules come from field experience of workflow design on Orchestrator 3.x and 4.x. A few facts were checked against Orchestrator 4.1.6; they are marked *(4.1.6)*. The screenshots show Orchestrator 4.1.6: the user interface and some option names differ in other versions. The concepts and rules do not.
- Workflow authoring: the content is derived from Orchestrator 4.1.6. The examples in Recipes were imported, published and executed on Orchestrator 4.1.6.
- Extending Orchestrator: the content comes from Plugin development and Portlet development, and was verified in the same way.
- Plugin development: the content is derived from Orchestrator 4.1.6. The example plugin of Plugin quick start was installed, enabled, and executed in a workflow on Orchestrator 4.1.6, and the steps of Installing a plugin and Updating a plugin were done on that server.
- Portlet development: the content is derived from Orchestrator 4.1.6.
  - On an Orchestrator 4.1.6.2036 server: the example portlet of Portlet quick start was imported with Import Portlet, chosen and configured in a dashboard frame, displayed, and its action called with GET and POST. In Chrome, the Ping link (`ajaxUpdate`) and the automatic refresh worked with no JavaScript error. The behaviors of import (file name, collision), enable, disable, restart, the version API and the CSRF token described in that chapter were reproduced on this server.
  - From Orchestrator: the security notes, the custom portlets, the legacy upgrade script, and the counts of the Portlet annex.

IBM Aspera®

End of document